
Looking ahead,
going beyond expectations

Ahead Beyond

EBARA

3E Series

Data Book 50Hz

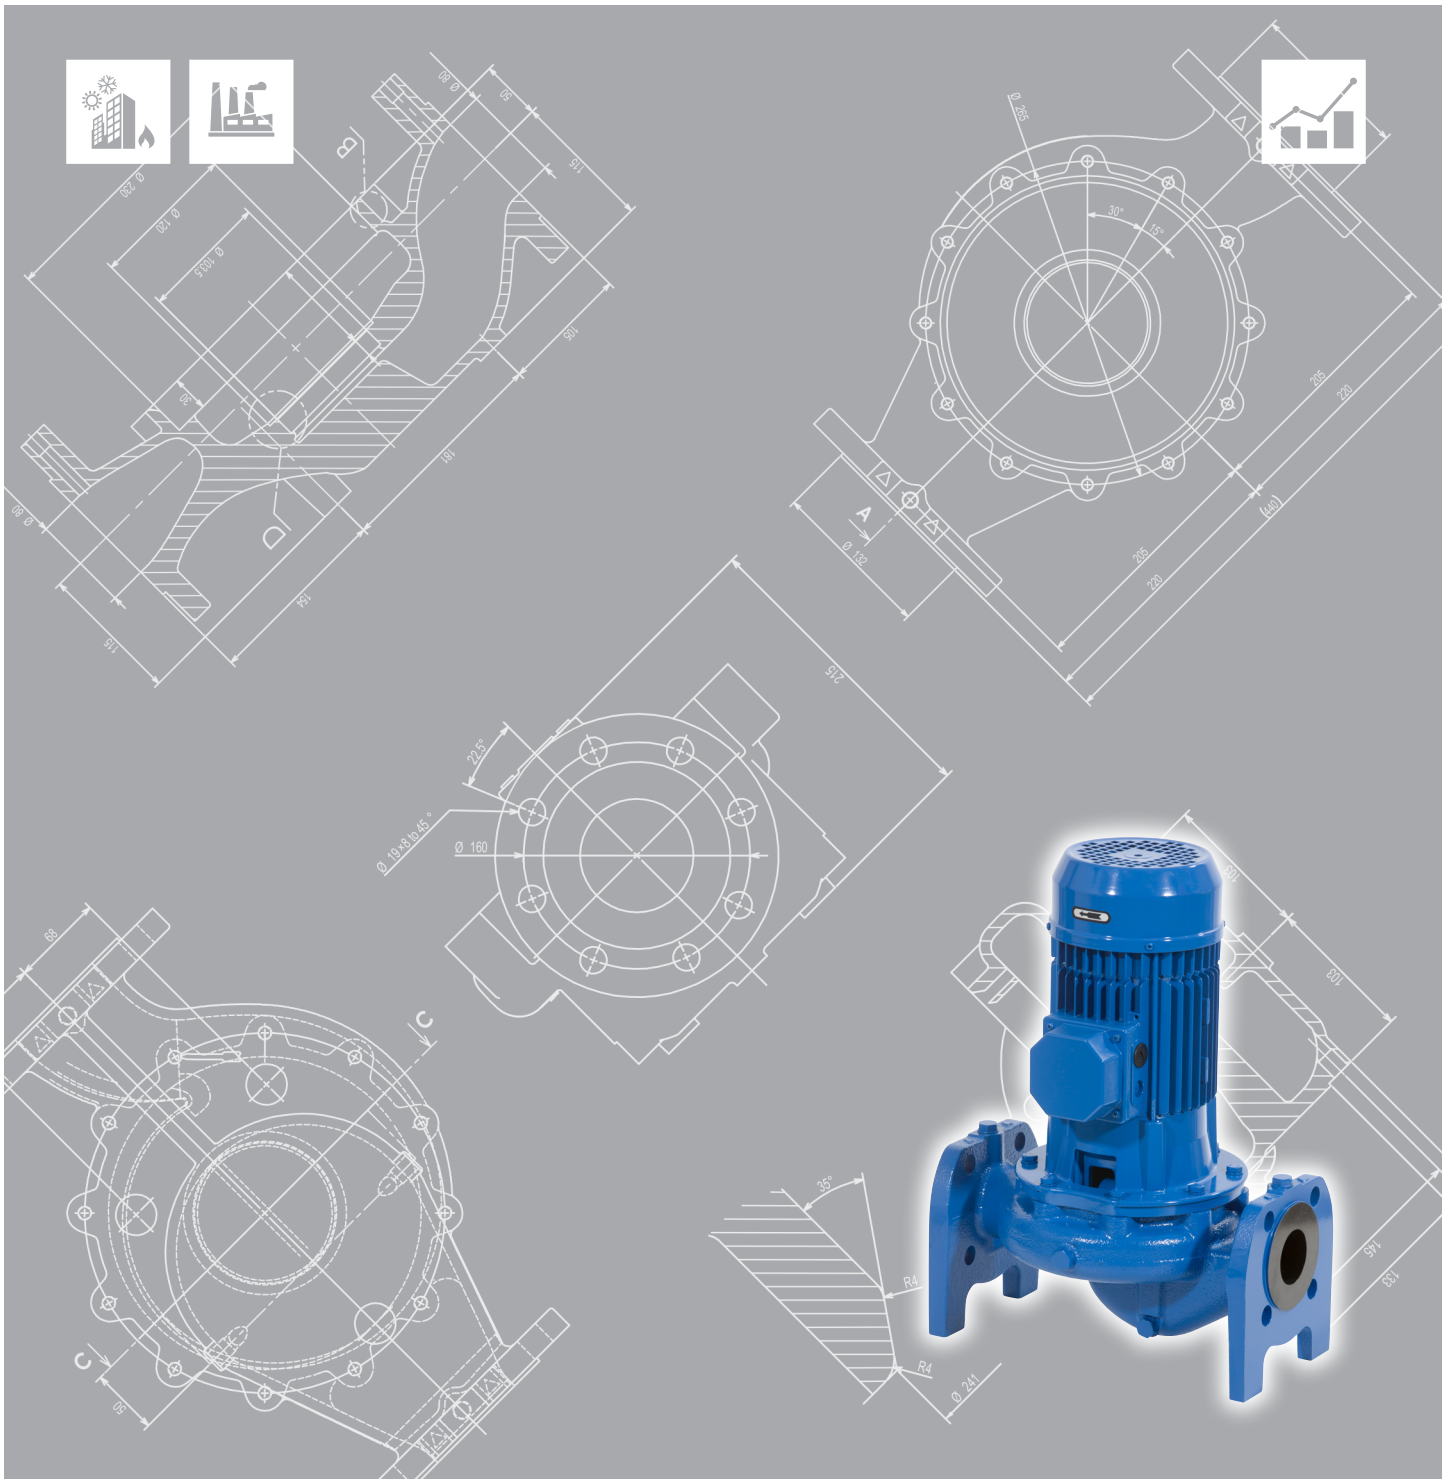

CONTENTS

50Hz

Rev.0

SPECIFICATION

PRODUCT FEATURES	201
MAIN APPLICATION	202
MODEL VARIATION	203
GENERAL SPECIFICATION PUMP	204
GENARAL SPECIFICATION MOTOR	205
PERFORMANCE RANGE 2 POLE	206
PERFORMANCE RANGE 4 POLE	207
SELECTION CHART 2 POLE	208
SELECTION CHART 4 POLE	209
TYPE KEY	210
PERFORMANCE CURVE SPECIFICATIONS	211
MEI INDEX SPECIFICATIONS	212
PERFORMANCE CURVE 2 POLE 32-125	213
PERFORMANCE CURVE 2 POLE 40-160	215
PERFORMANCE CURVE 2 POLE 40-200	216
PERFORMANCE CURVE 2 POLE 50-100	217
PERFORMANCE CURVE 2 POLE 50-125	218
PERFORMANCE CURVE 2 POLE 50-160	219
PERFORMANCE CURVE 2 POLE 50-200	220
PERFORMANCE CURVE 2 POLE 65-100	221
PERFORMANCE CURVE 2 POLE 65-200	224
PERFORMANCE CURVE 2 POLE 80-100	225
PERFORMANCE CURVE 2 POLE 80-160	227
PERFORMANCE CURVE 2 POLE 80-200	228
PERFORMANCE CURVE 2 POLE 100-160	229
PERFORMANCE CURVE 4 POLE 40-200	235
PERFORMANCE CURVE 4 POLE 50-125	236
PERFORMANCE CURVE 4 POLE 50-200	238
PERFORMANCE CURVE 4 POLE 65-160	241
PERFORMANCE CURVE 4 POLE 80-200	245
PERFORMANCE CURVE 4 POLE 100-160	247

CONTENTS

50Hz

Rev.0

CONSTRUCTION

SECTIONAL VIEW DRAWINGS 3E 32-125,40-160, 50-100/125/160,65-100,80-100	301
SECTIONAL VIEW TABLE 3E 32-125,40-160, 50-100/125/160,65-100,80-100	302
SECTIONAL VIEW DRAWINGS 3E 40-200	303
SECTIONAL VIEW TABLE 3E 40-200	304
SECTIONAL VIEW DRAWINGS 3E 50-200, 65-200,80-160/200,100-160	305
SECTIONAL VIEW TABLE 3E 50-200,65-200, 80-160/200,100-160	306
SECTIONAL VIEW DRAWINGS 3ES 32-125,40-160, 50-100/125/160,65-100,80-100	307
SECTIONAL VIEW TABLE 3ES 32-125,40-160, 50-100/125/160,65-100,80-100	308
SECTIONAL VIEW DRAWINGS 3ES 40-200	309
SECTIONAL VIEW TABLE 3ES 40-200	310
SECTIONAL VIEW DRAWINGS 3ES 50-200,65-200, 80-160/200,100-160	311
SECTIONAL VIEW TABLE 3ES 50-200,65-200, 80-160/200,100-160	312
SECTIONAL VIEW DRAWINGS 3E4 50-125	313
SECTIONAL VIEW TABLE 3E4 50-125	314
SECTIONAL VIEW DRAWINGS 3E4 100-160	315
SECTIONAL VIEW TABLE 3E4 100-160	316
SECTIONAL VIEW DRAWINGS 3E4 40-200,65-160	317
SECTIONAL VIEW TABLE 3E4 40-200,65-160	318
SECTIONAL VIEW DRAWINGS 3E4 50-200,80-200	319
SECTIONAL VIEW TABLE 3E4 50-200,80-200	320
SECTIONAL VIEW DRAWINGS 3ES4 100-160	325
SECTIONAL VIEW TABLE 3ES4 100-160	326
SECTIONAL VIEW DRAWINGS 3ES4 40-200,65-160	329
SECTIONAL VIEW TABLE 3ES4 40-200,65-160	330
SECTIONAL VIEW DRAWINGS 3ES4 50-200,80-200	331
SECTIONAL VIEW TABLE 3ES4 50-200,80-200	332
BEARINGS 3E 2 POLE	333

CONTENTS

50Hz

Rev.0

BEARINGS 3E 4 POLE 334
BEARINGS 3ES 2 POLE 335
BEARINGS 3ES 4 POLE 336
MECHANICAL SEAL 2 POLE(Standard & Optional) 337
MECHANICAL SEAL 2 POLE(Standard & Optional) 338
MECHANICAL SEAL 4 POLE(Standard & Optional) 339
COUPLING (STUB SHAFT/ FOR 3ES 2 POLE) 342
COUPLING (STUB SHAFT/ FOR 3ES 4 POLE) 343
BASE PLATE 344
COUNTER FLANGE & GASKET 345

DIMENSION & WEIGHT

DIMENSIONS & WEIGHT 3E 2 POLE 346
DIMENSIONS & WEIGHT 3E 4 POLE 347
DIMENSIONS & WEIGHT 3ES 2 POLE 348
DIMENSIONS & WEIGHT 3ES 4 POLE 349
PACKING 3E 2 POLE 350
PACKING 3E 4 POLE 351
PACKING 3ES 2 POLE 352
PACKING 3ES 4 POLE 353

TECHNICAL DATA

MOTOR DATA 3E 2 POLE 354
MOTOR DATA 3E 4 POLE 355
MOTOR DATA 3ES 2 POLE 356
MOTOR DATA 3ES 4 POLE 357
NOISE DATA 3E-3ES 2 POLE 358
NOISE DATA 3E-3ES 4 POLE 359

PRODUCT FEATURES

Energy-saving design

- ✓ Major improvement over our previous models by impeller designed using our proprietary 3D inverse design technology.
- ✓ Higher efficiency means lower energy consumption and motor output, and more compact size.

Easy installation and simple maintenance

- ✓ Alignment is not required.
- ✓ Back pull-out structure enables disassembly and inspection without removal of suction and discharge piping.
- ✓ Shield bearings eliminate need for adding or exchanging lubricating oil.
- ✓ Shaft seal flushing piping not required for the standard application.
- ✓ Air-bleeding not required.
- ✓ Simplified shaft seal and “O” ring body seal enable easy assembly.

Pump specifications & features

- ✓ Maximum operating pressure: 1.6 MPa(*)
- ✓ Liquid temperature range expansion: -10℃ to 120℃
- ✓ Back pull-out design
- ✓ ring casing seal

International standards

- ✓ Pump design adopt EN733.
- ✓ Mechanical seal adopts EN12756/
- ✓ Protector fitted in accordance with EN294.
- ✓ Electric motor conforms to IEC60072-1 and IEC60034-1

(*) Several models are 1.0MPa

MAIN APPLICATIONS

BUILDING SERVICE



- ✓ Air conditioning-district heating & cooling
- ✓ HVAC system
- ✓ General water supply
- ✓ Hot water circulation
- ✓ Pressure boosting

WATER SUPPLY



- ✓ Water supply duties for municipalities
- ✓ Heat station
- ✓ Irrigation
- ✓ Drainage clean water
- ✓ Fire protection
- ✓ Swimming pool
- ✓ Pressure boosting

OEM



- ✓ Air conditioner
- ✓ Chilling unit
- ✓ Boiler
- ✓ Heat exchanger
- ✓ Coolant unit
- ✓ Water circulation unit

MODEL VARIATION

50Hz

Version		3E		3ES	
pole		2 pole	4 pole	2 pole	4 pole
Pump Size	32-125	◆	-	◆	-
	32-160	-	-	-	-
	32-200	-	-	-	-
	40-100	-	-	-	-
	40-160	◆	-	◆	-
	40-200	◆	◆	◆	◆
	50-100	◆	-	◆	-
	50-125	◆	◆	◆	-
	50-160	◆	-	◆	-
	50-200	◆	◆	◆	◆
	65-100	◆	-	◆	-
	65-125	-	-	-	-
	65-160	-	◆	-	◆
	65-200	◆	-	◆	-
	80-100	◆	-	◆	-
	80-125	-	-	-	-
	80-160	◆	-	◆	-
	80-200	◆	◆	◆	◆
	80-250	-	-	-	-
	100-160	◆	◆	◆	◆
	100-200	-	-	-	-
	100-250	-	-	-	-

GENERAL SPECIFICATIONS PUMP

50Hz

PUMP						
Version			3E		3ES	
Pole			2 pole	4 pole	2 pole	4 pole
Liquid Handled	Type of liquid		Clean water, Brine(anti-freezing liquid) [1]			
	Temperature [°C]		-10 to 120			
Maximum working pressure [MPa]			1.6 or 1.0 [2]			
Maximum suction pressure [MPa]			1.6 or 1.0 - Shut-off pressure			
Construction	Impeller		Closed centrifugal type			
	Shaft seal type		Mechanical seal (with air ventilation system)			
	Bearing		Sealed ball bearing (Inside of the Motor)			
Pipe Connection	Suction and Discharge	32-100/125/160/200	Flange DN32 according EN 1092-2 Standard			
		40-100/125/160/200	Flange DN40 according EN 1092-2 Standard			
		50-100/125/160/200	Flange DN50 according EN 1092-2 Standard			
		65-100/125/160/200	Flange DN65 according EN 1092-2 Standard			
		80-100/125/160/200/250	Flange DN80 according EN 1092-2 Standard			
		100-160/200/250	Flange DN100 according EN 1092-2 Standard			
Material	Casing		Cast iron EN-GJL-250-EN 1561			
	Impeller	32,40,50,65 series	EN 1.4301 (AISI 304)			
		80,100 series	EN 1.4404 (AISI 316L)			
	Casing cover	32,40,50,65 series	EN 1.4301 (AISI 304)			
		80,100 series	EN 1.4404 (AISI 316) stainless casting			
	Mechanical seal		SiC/Carbon/EPDM as a standard(Q1AEGG) SiC/SiC/EPDM as an optional(Q4Q1EGG) SiC/SiC/FPM as an optional(Q4Q1VGG) SiC/Carbon/FPM as an optional(Q1AVGG) (For version see page 337÷341)			
	O-ring		EPDM as a standard FPM as an optional			
	Shaft	Designation	Extended shaft		Stub-shaft	
		32,40,50,65 series	EN 1.4301 (AISI 304) for wetted part Carbon steel for dry part		EN 1.4301 (AISI 304) for wetted part Carbon steel for dry part	
		80,100 series	EN 1.4404 (AISI 316L) for wetted part Carbon steel for dry part		EN 1.4404 (AISI 316L) for wetted part Carbon steel for dry part	
	Bracket		Aluminium		Cast iron EN-GJL-250-EN 1561	
Accessory (upon request)			Counter Flange (See page 345)			
Applicable standard of test			ISO 9906:2012 – Grade 3B			

[1] Viscosity and Density shall be equivalent with water

[2] Depending on the model. See selection chart page 208 and 209

SPECIFICATION

50Hz

Rev.0


GENERAL SPECIFICATIONS MOTOR

50Hz

MOTOR					
Type		3E		3ES	
		Electric - TEFC			
		Three Phase			
Efficiency level (Reg. 640/2009)		IE2 from 0.37 kW up to 0.55 kW IE3 from 0.75 kW up to 37 kW			
No. of Poles		2	4	2	4
Rotation speed	[min-1]	～2900	～1450	～2900	～1450
Insulation Class		F (temperature rise class B)			
Protection degree (CEI EN 60034-5)		IP55			
Power rating	[kW]	0.37 ÷ 18.5	0.37 ÷ 3.0	0.75 ÷ 18.5	0.55 ÷ 3.0
	[HP]	0.5 ÷ 25	0.5 ÷ 4	1 ÷ 25	0.75 ÷ 4
Frequency	[Hz]	50			
Voltage	[V]	230/400 ±10% (up to 4.0 kW) 400/690 ±10% (5.5 kW and above)			
Over load protection		Provided by the user			
Casing material		Aluminium			
Motor support material		Cast iron / Aluminium			
Dimensions of cable entry		PG11, PG13.5, PG16, PG21 M20x1.5, M25x1.5		M32x1.5, M40x1.5, M50x1.5 M10x1.5, M20x1.5, M25x1.5	
Flange mount (IEC motor)		---		IM B5 (up to 2.2 kW) IM B35 (3 kW and above)	


PERFORMANCE RANGE 2 POLE

3E/3ES-50Hz-2 POLE

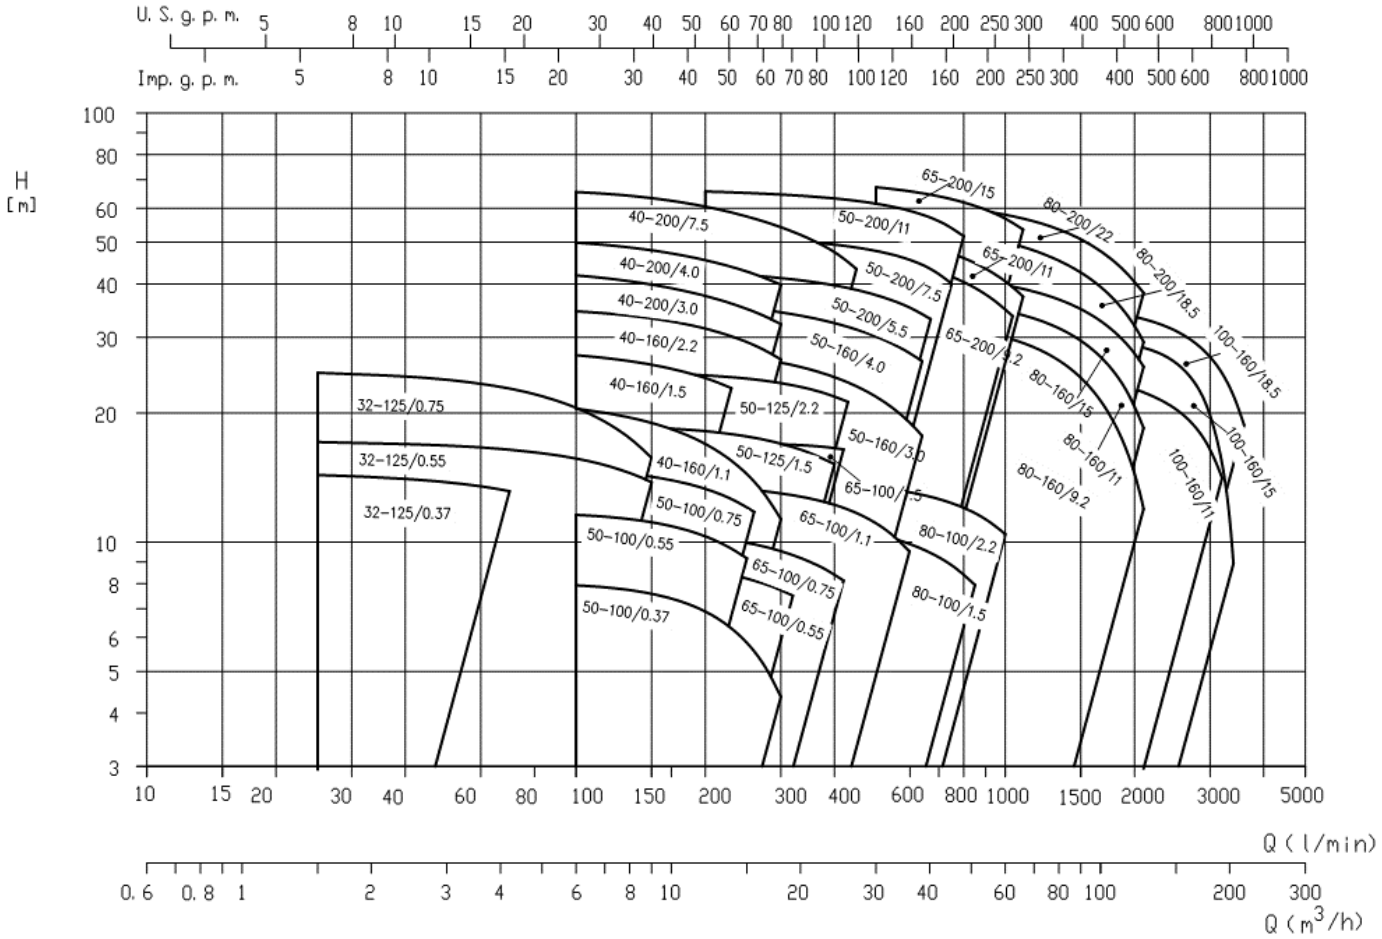

PERFORMANCE RANGE 4 POLE

3E/3ES-50Hz-4 POLE

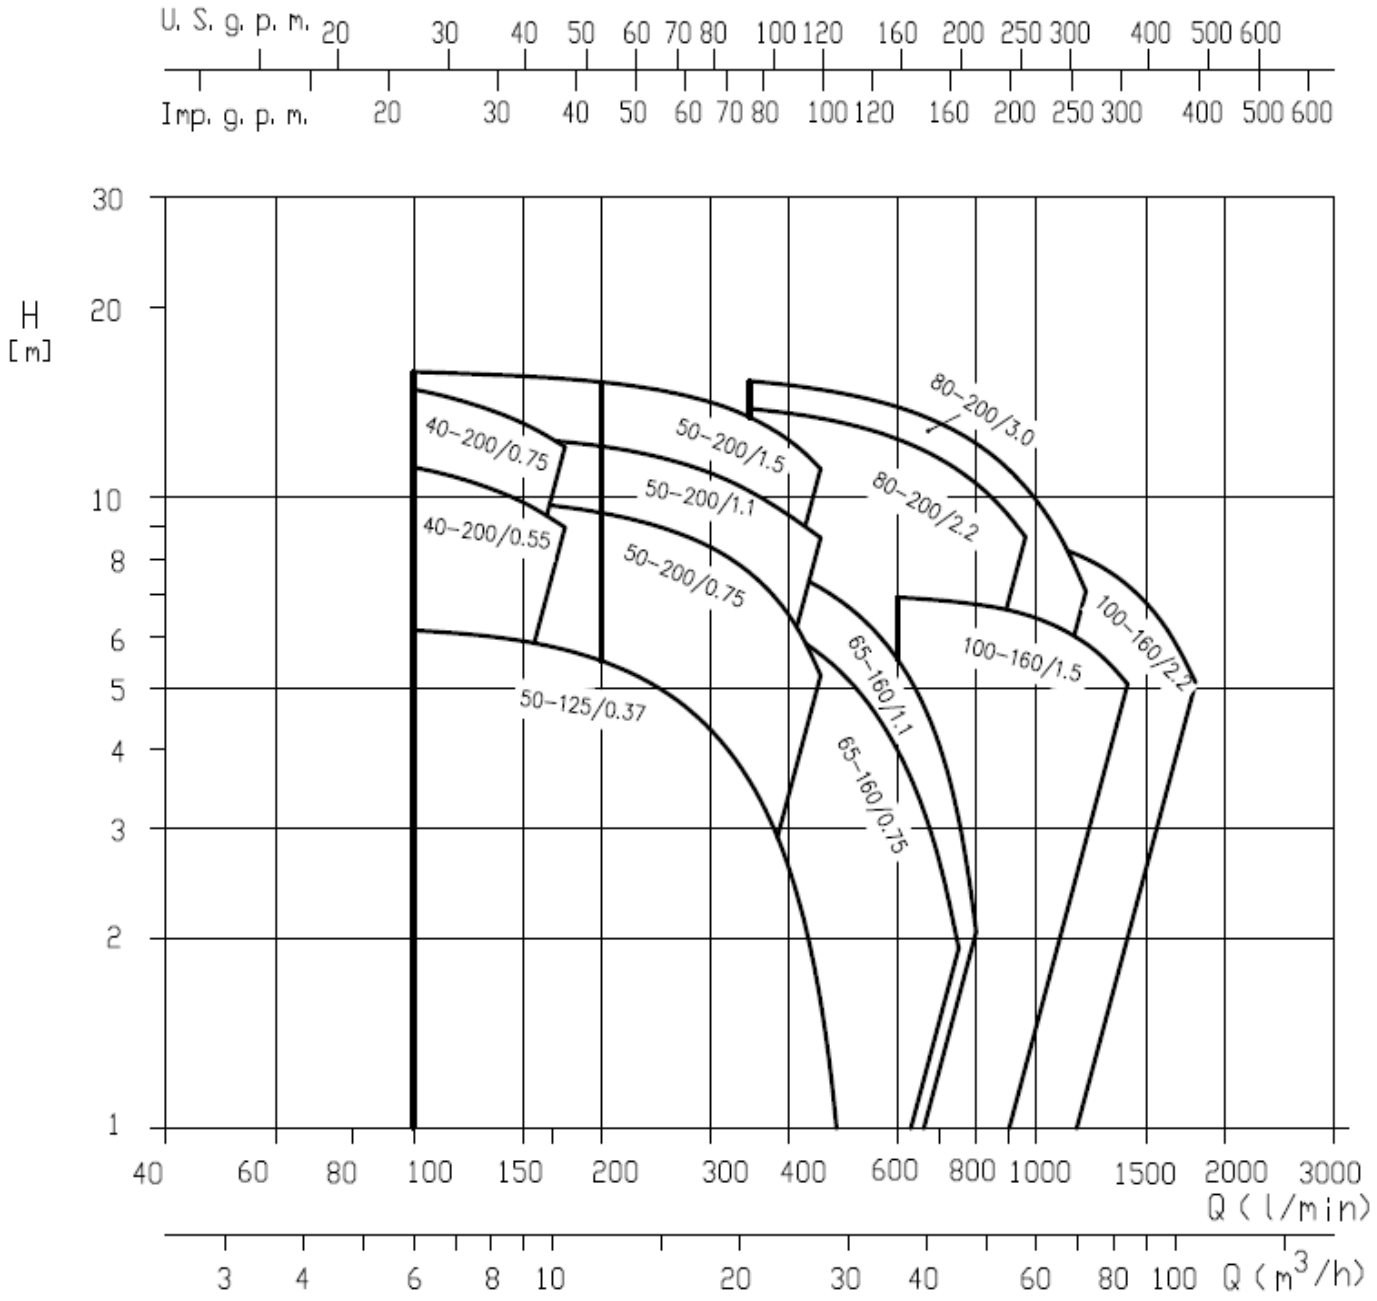

SELECTION CHART 50Hz 2 POLE

3E SERIES : 32 SIZE

Pump type	kW	HP	Max. working pressure (MPa)	l/min	0	25	50	70	75	100	125	150
				m^3/h	0	1.5	3	4.2	4.5	6	7.5	9
32-125/0.37	0.37	0.5	1.0		14.6	14.3	13.7	13.1	—	—	—	—
32-125/0.55	0.55	0.75	1.0		17.2	17	16.7	16.4	16.3	15.6	14.8	13.7
32-125/0.75	0.75	1	1.0		24.9	24.7	23.9	22.8	22.4	20.5	18.3	15.7

3E SERIES : 40 SIZE

Pump type	kW	HP	Max. working pressure (MPa)	l/min	0	100	150	200	230	250	300	400	450
				m^3/h	0	6	9	12	13.8	15	18	24	27
40-160/1.1	1.1	1.5	1.6		21.5	20.4	18.9	16.9	15.4	14.4	11.3	—	—
40-160/1.5	1.5	2	1.6		28.6	27.2	25.9	24.1	22.8	—	—	—	—
40-160/2.2	2.2	3	1.6		35.2	34.5	33.2	31.4	30.2	29.2	26.6	—	—
40-200/3.0	3	4	1.6		43.1	41.8	39.8	37.4	36	34.9	32.2	—	—
40-200/4.0	4	5.5	1.6		51.1	49.9	47.9	45.4	43.8	42.7	39.8	—	—
40-200/7.5	7.5	10	1.6		65.5	65.5	63.3	60.5	58.7	57.4	54.2	47.4	43.3

3E SERIES : 50 SIZE

Pump type	kW	HP	Max. working pressure (MPa)	l/min	0	200	250	300	350	400	450	500	640	650	750	800
				m^3/h	0	12	15	18	21	24	27	30	38.4	39	45	48
50-100/0.37	0.37	0.5	1.0		7.8	6.8	5.8	4.3	—	—	—	—	—	—	—	—
50-100/0.55	0.55	0.75	1.0		11.3	10.3	9.1	—	—	—	—	—	—	—	—	—
50-100/0.75	0.75	1	1.0		14.7	13.3	12	—	—	—	—	—	—	—	—	—
50-125/1.5	1.5	2	1.6		18.1	18.1	17.6	16.9	16.1	15.1	—	—	—	—	—	—
50-125/2.2	2.2	3	1.6		24.6	24.4	24	23.4	22.7	21.8	20.8	—	—	—	—	—
50-160/3.0	3	4	1.6		29.1	27.7	27	26.2	25.2	24.2	23	21.8	17.6	—	—	—
50-160/4.0	4	5.5	1.6		37	35.8	35.1	34.3	33.4	32.4	31.3	30.1	26.4	26.1	—	—
50-200/5.5	5.5	7.5	1.6		43.5	42.4	41.9	41.2	40.5	39.6	38.7	37.6	34	33.7	—	—
50-200/7.5	7.5	10	1.6		53.4	51.7	51.1	50.6	50	49.3	48.6	47.7	44.3	43.9	40	—
50-200/11	11	15	1.6		67.2	65.6	65.1	64.6	63.9	63.2	62.4	61.5	58	57.7	54	51.6

3E SERIES : 65 SIZE

Pump type	kW	HP	Max. working pressure (MPa)	l/min	0	100	200	300	400	450	500	600	900	1000	1100
				m^3/h	0	6	12	18	24	27	30	36	54	60	66
65-100/0.55	0.55	0.75	1.0		9.5	9.2	8.6	7.7	—	—	—	—	—	—	—
65-100/0.75	0.75	1	1.0		11.1	10.8	10.3	9.5	8.4	7.7	—	—	—	—	—
65-100/1.1	1.1	1.5	1.0		14.3	13.8	13.5	13	12.2	11.6	11	9.4	—	—	—
65-100/1.5	1.5	2	1.0		18.1	17.2	17	16.1	16.5	16.2	—	—	—	—	—
65-200/9.2	9.2	12.5	1.6		48.7	—	—	—	47.4	46.8	46.1	44.6	37.7	34.8	—
65-200/11	11	15	1.6		54.1	—	—	—	52.9	52.3	51.6	50	43.4	40.5	37.3
65-200/15	15	20	1.6		69.2	—	—	—	68.3	67.8	67.1	65.7	59.5	56.7	53.5

3E SERIES : 80 SIZE

Pump type	kW	HP	Max. working pressure (MPa)	l/min	0	600	700	850	1000	1100	1300	1600	1900	2000	2100
				m^3/h	0	36	42	51	60	66	78	96	114	120	126
80-100/1.5	1.5	2	1.0		12.4	9.9	9.2	7.9	—	—	—	—	—	—	—
80-100/2.2	2.2	3	1.0		14.4	13	12.6	11.6	10.4	—	—	—	—	—	—
80-160/9.2	9.2	12.5	1.6		33.6	32.4	32	31.1	30	29.1	26.9	22.5	16.7	14.4	12
80-160/11	11	15	1.6		37.9	36.9	36.4	35.6	34.6	33.8	31.9	28	22.8	20.7	18.4
80-160/15	15	20	1.6		43	42	41.5	40.7	39.7	38.9	37.1	33.6	29.2	27.5	25.6
80-200/18.5	18.5	25	1.6		55.4	54.3	53.4	51.9	50.1	48.7	45.8	40.6	34.3	31.9	29.2
80-200/22	22	30	1.6		62.8	61.3	60.6	59.4	57.9	56.8	54	48.9	42.7	40.4	38.1

3E SERIES : 100 SIZE

Pump type	kW	HP	Max. working pressure (MPa)	l/min	0	1300	1500	1700	1900	2100	2500	3000	3200	3400	3600
				m^3/h	0	78	90	102	114	126	150	180	192	204	216
100-160/11	11	15	1.6		28.6	25.2	24.5	23.8	23.1	22.3	20.4	16.4	14.1	—	—
100-160/15	15	20	1.6		32.9	30.9	30.2	29.6	29.1	28.4	26.1	19.7	15.1	8.9	—
100-160/18.5	18.5	25	1.6		37	35.5	35	34.5	33.9	33.1	31	27	24.7	22	18.7

SELECTION CHART 50Hz 4 POLE

3E SERIES : 40 SIZE

Pump type	kW	HP	Max. working pressure (MPa)	l/min	0	50	100	150	170	175
				m^3/h	0	3	6	9	10.2	10.5
40-200/0.55	0.55	0.75	1.6		12.6	12	11.1	9.8	9.1	—
40-200/0.75	0.75	1	1.6		16.2	15.9	14.8	13.1	12.2	12

3E SERIES : 50 SIZE

Pump type	kW	HP	Max. working pressure (MPa)	l/min	0	100	150	200	250	300	400	450
				m^3/h	0	6	9	12	15	18	24	27
50-125/0.37	0.37	0.75	1.6		6	6.1	5.9	5.5	4.9	4.2	2.5	1.5
50-200/0.75	0.75	1	1.6		10.4	10.1	9.8	9.4	8.9	8.3	6.5	5.2
50-200/1.1	1.1	1.5	1.6		13	12.6	12.4	12	11.5	10.9	9.3	8.6
50-200/1.5	1.5	2	1.6		16.4	15.8	15.5	15.2	14.7	14.1	12.3	11.1

3E SERIES : 65 SIZE

Pump type	kW	HP	Max. working pressure (MPa)	l/min	0	200	250	300	350	400	500	600	700	750	800
				m^3/h	0	12	15	18	21	24	30	36	42	45	48
65-160/0.75	0.75	1	1.6		7.3	7.2	7	6.8	6.4	6.1	5.1	3.9	2.6	1.9	—
65-160/1.1	1.1	1.5	1.6		8.8	8.7	8.5	8.3	8	7.6	6.7	5.5	4	3.1	2


3E SERIES : 80 SIZE

Pump type	kW	HP	Max. working pressure (MPa)	l/min	0	350	500	600	800	950	1000	1050	1100	1200
				m^3/h	0	21	30	36	48	57	60	63	66	72
80-200/2.2	2.2	3	1.6		14.2	13.8	13	12.3	10.5	8.7	—	—	—	—
80-200/3.0	3	4	1.6		15.9	15.2	14.5	13.9	12.1	10.5	9.8	9.2	8.5	7.1

3E SERIES : 100 SIZE

Pump type	kW	HP	Max. working pressure (MPa)	l/min	0	600	800	950	1000	1050	1100	1200	1300	1400	1600	1800
				m^3/h	0	36	48	57	60	63	66	72	78	84	96	108
100-160/1.5	1.5	2	1.6		7.7	6.9	6.7	6.5	6.4	6.3	6.1	5.8	5.4	5	—	—
100-160/2.2	2.2	3	1.6		9.6	9	8.8	8.6	8.5	8.4	8.2	8	7.6	7.2	6.2	5

TYPE KEY

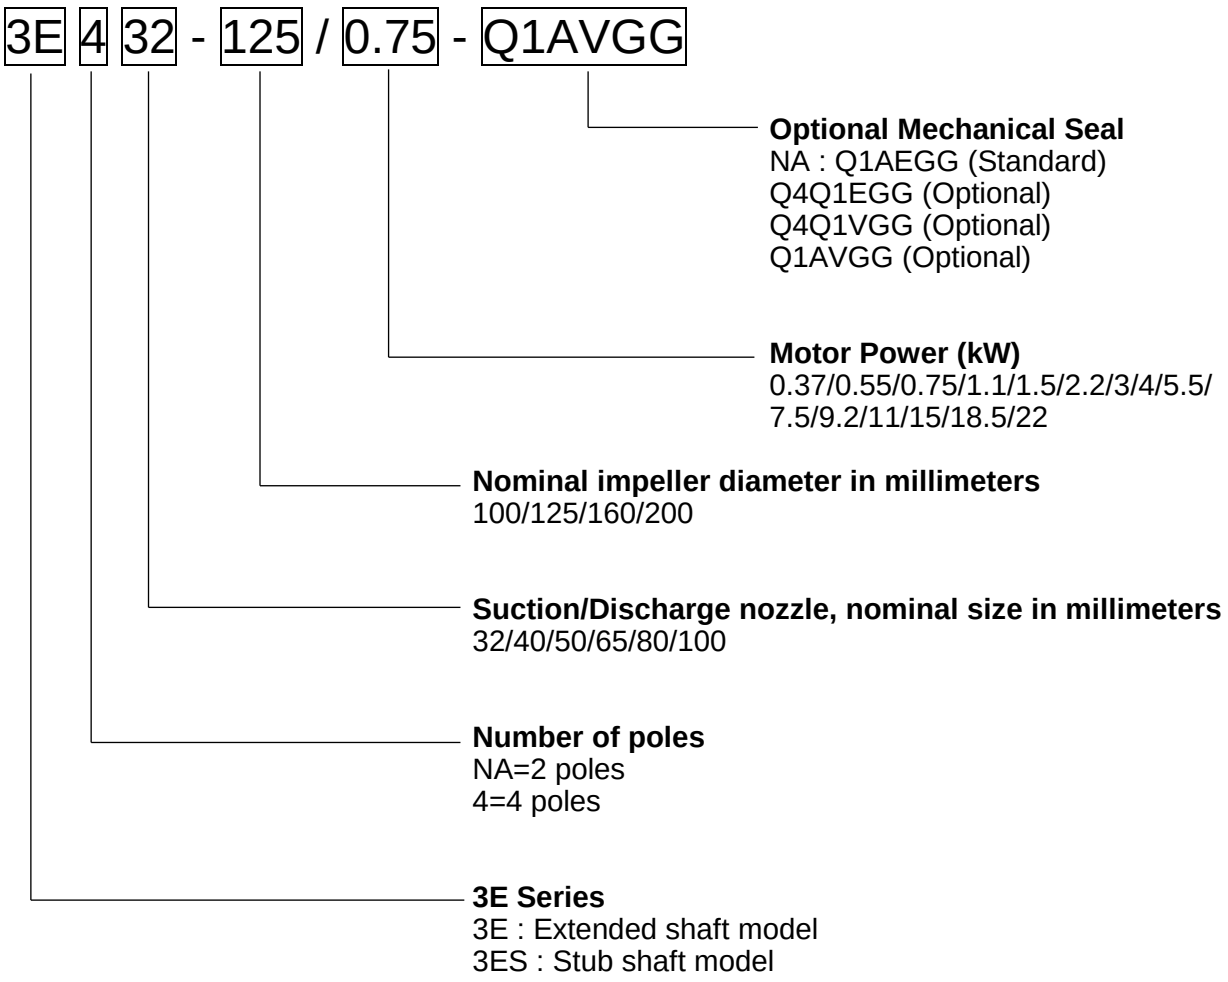
3E 4 32 - 125 / 0.75 - Q1AVGG
Optional Mechanical Seal
NA : Q1AEGG (Standard)
Q4Q1EGG (Optional)
Q4Q1VGG (Optional)
Q1AVGG (Optional)
Motor Power (kW)
0.37/0.55/0.75/1.1/1.5/2.2/3/4/5.5/
7.5/9.2/11/15/18.5/22
Nominal impeller diameter in millimeters
100/125/160/200
Suction/Discharge nozzle, nominal size in millimeters
32/40/50/65/80/100
Number of poles
NA=2 poles
4=4 poles
3E Series
3E : Extended shaft model
3ES : Stub shaft model

PERFORMANCE CURVE SPECIFICATIONS

The specifications below qualify the curves shown on the following pages.

Tolerances according to ISO 9906:2012 - Grade 3B
The curves refer to effective speed of asynchronous motors at 50 Hz, 2 poles.
Measurements were carried out with clean water at 20°C of temperature and with a kinematic viscosity of ν = 1 mm^2/s (1 cSt)

The NPSH curve is an average curve obtained in the same conditions of performance curves.
The continuous curves indicate the recommended working range. The dotted curve is only a guide.
In order to avoid the risk of over-heating, the pumps should not be used at a flow rate below 10% of best efficiency point.

Symbols explanation:

Q	=	volume flow rate
H	=	total head
P_2	=	pump power input (shaft power)
η	=	pump efficiency
NPSH	=	net positive suction head required by the pump
MEI	=	minimum efficiency index


MEI INDEX SPECIFICATION

The minimum efficiency index (MEI) is a measure of the quality of a pump size in respect to its mean efficiency. The minimum efficiency index is based on the hydraulic efficiency and on the head at the best efficiency point.


The efficiency of a pump with trimmed impeller is usually lower than that of a pump with the full impeller diameter. The trimming of the impeller will adapt the pump to a fixed duty point, leading to a reduced energy consumption. The minimum efficiency index (MEI) is based on the full impeller diameter.

The operation of these water pumps with variable duty points may be more efficient and economical when controlled, for example, by the use of a variable speed drive that matches the pump duty to the system.


MEI = 0.4 for ESCCi 2900rpm

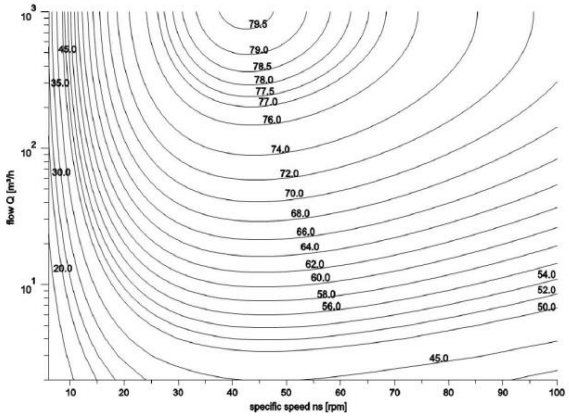


MEI=0.7 for ESCCi 2900 rpm

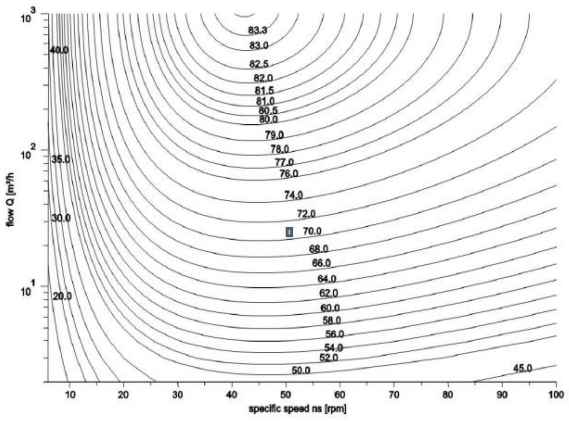

MEI = 0.4 for ESCCi 1450 rpm

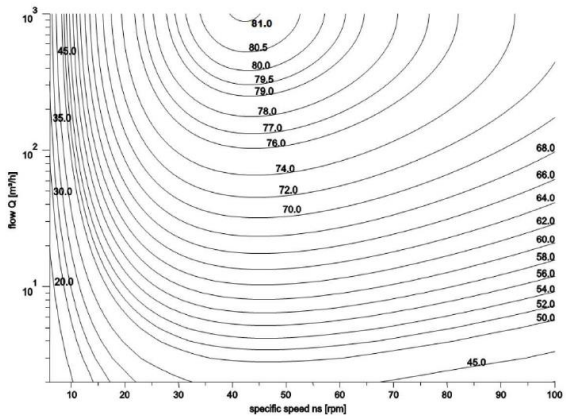

MEI = 0.7 for ESCCi 1450rpm

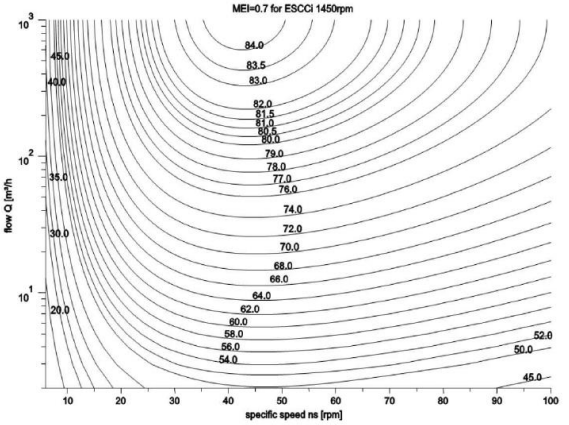


PERFORMANCE CURVE

50Hz

Rev.0

3E(S) 32-125 **2 POLE**

32-125/0.37 (0.37 kW) - impeller diameter = 114mm
32-125/0.55 (0.55 kW) - impeller diameter = 135 mm
32-125/0.75 (0.75 kW) - impeller diameter = 144 mm

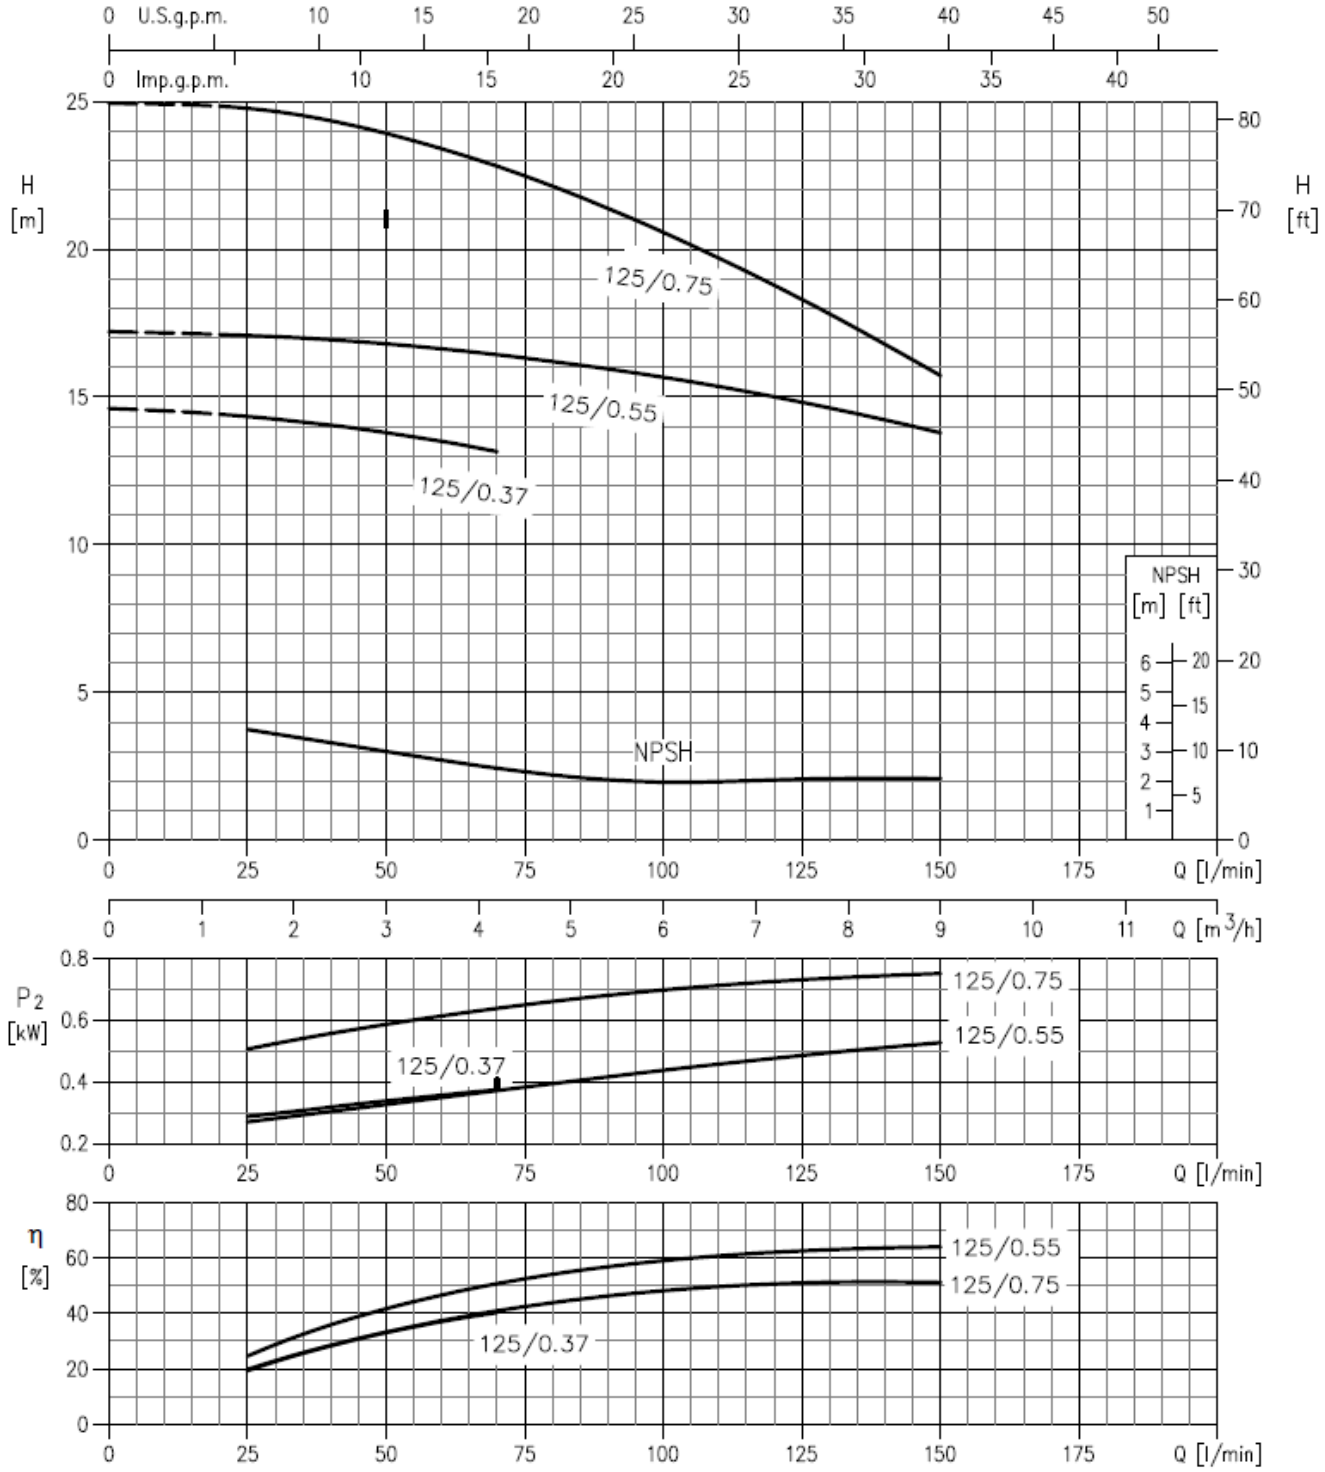

Rotation speed ≈ 2900 min-1
Test standard : ISO 9906 Annex A

EBARA CORPORATION

PM10U


PERFORMANCE CURVE

50Hz

Rev.0

3E(S) 40-160 **2 POLE**

40-160/1.1 (1.1 kW) - impeller diameter = 133 mm
40-160/1.5 (1.5 kW) - impeller diameter = 151 mm
40-160/2.2 (2.2 kW) - impeller diameter = 166 mm

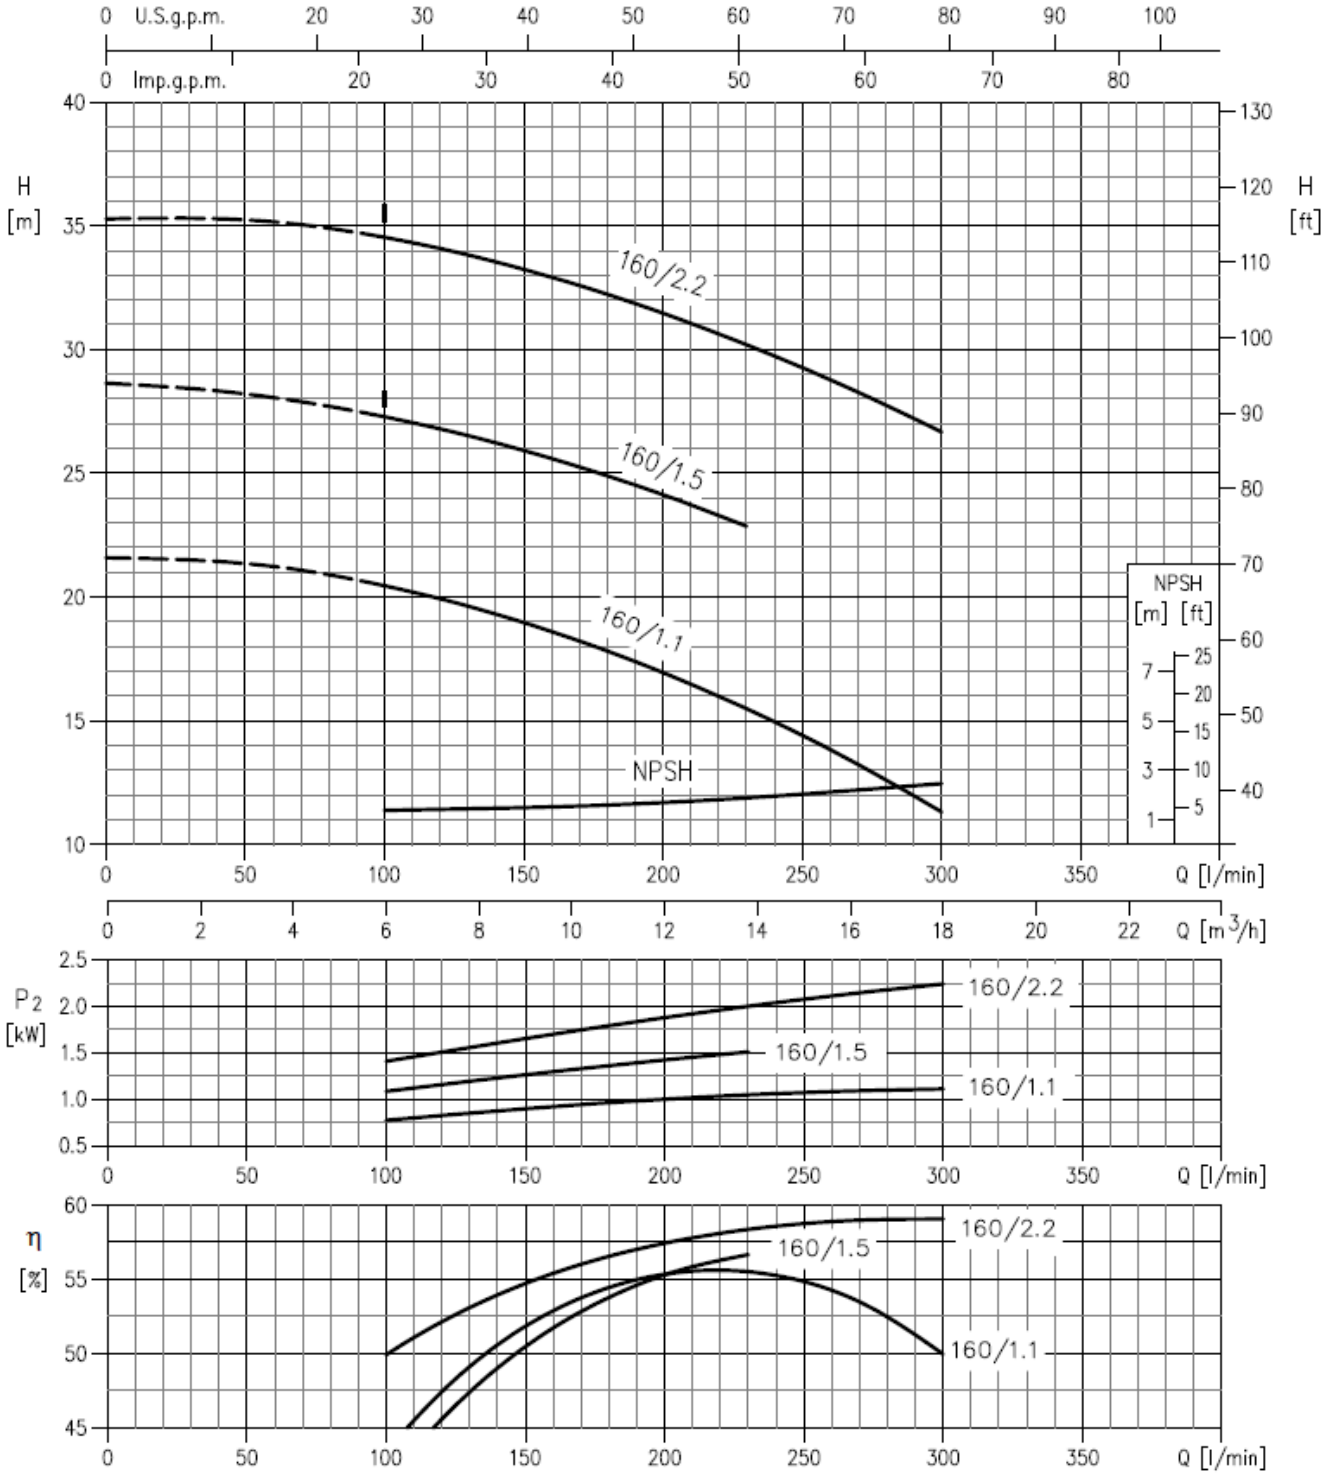

Rotation speed ≈ 2900 min-1
Test standard : ISO 9906 Annex A

EBARA CORPORATION

PM10U


PERFORMANCE CURVE

50Hz

Rev.0

3E(S) 40-200 **2 POLE**

40-200/3.0 (3.0 kW) - impeller diameter = 186 mm
40-200/4.0 (4.0 kW) - impeller diameter = 200 mm
40-200/7.5 (7.5 kW) - impeller diameter = 224 mm

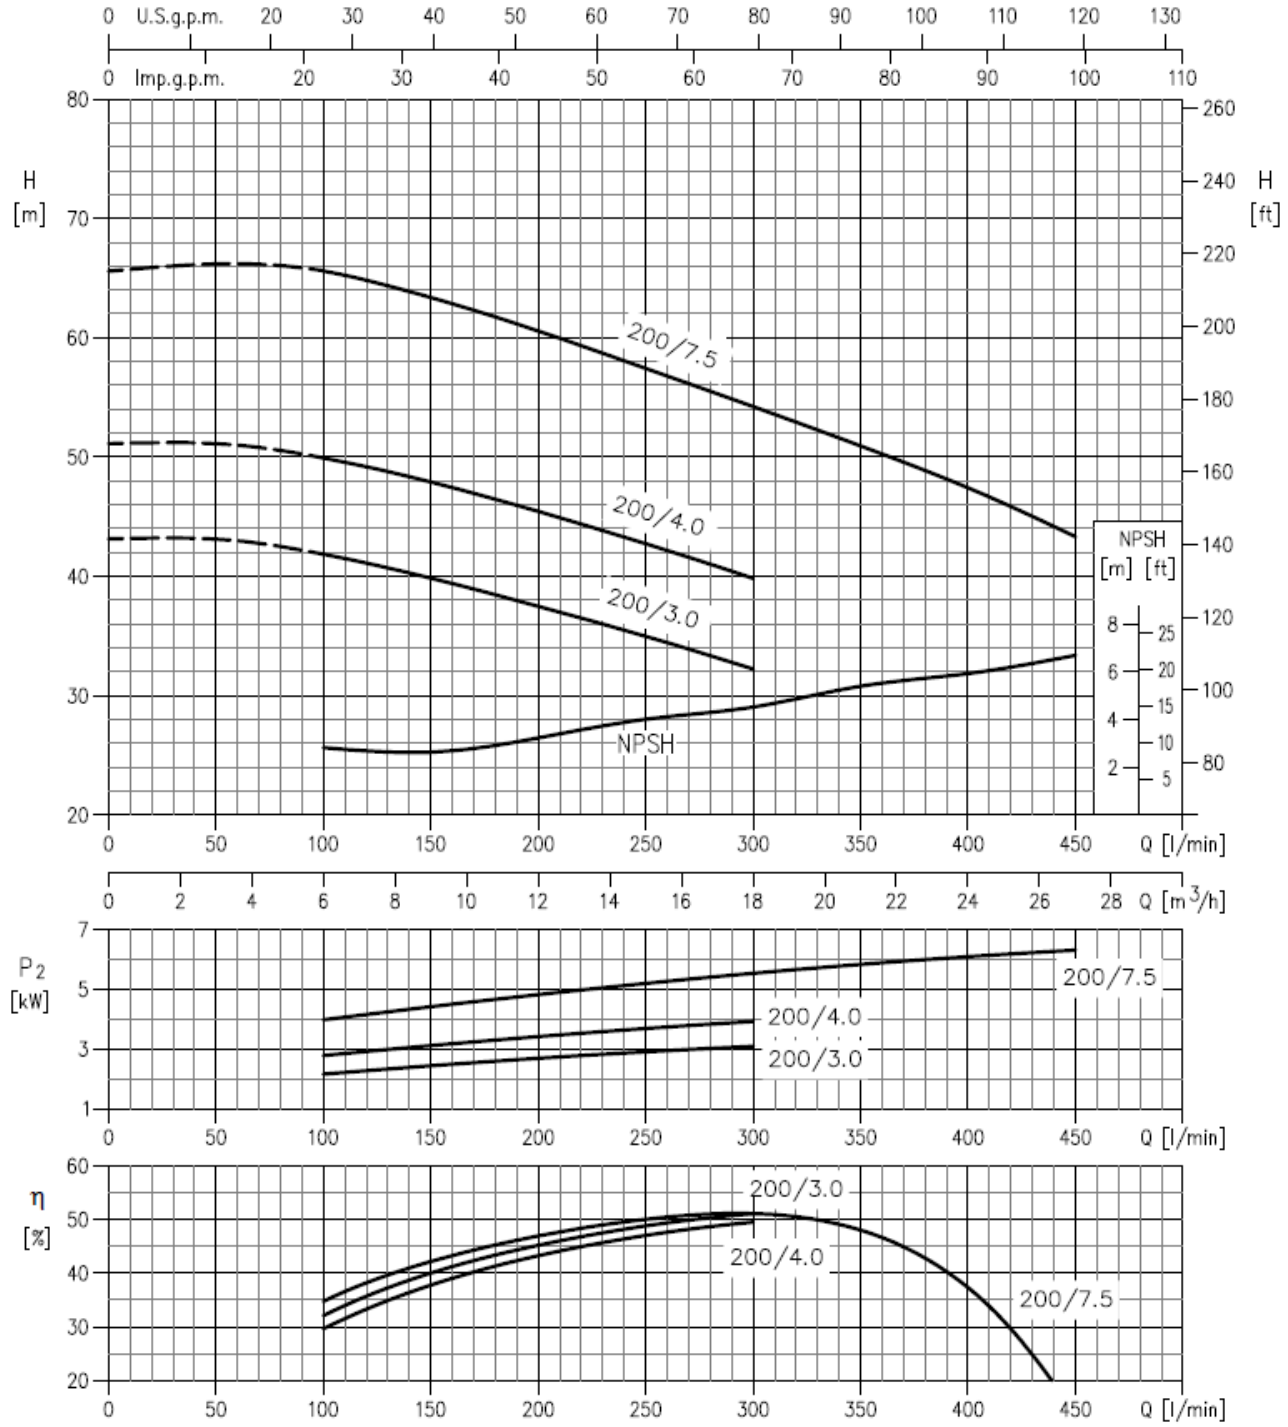

Rotation speed ≈ 2900 min-1
Test standard : ISO 9906 Annex A

EBARA CORPORATION

PM10U


PERFORMANCE CURVE

50Hz

Rev.0

3E(S) 50-100 **2 POLE**

50-100/0.37 (0.37 kW) - impeller diameter = 86 mm
50-100/0.55 (0.55 kW) - impeller diameter = 101 mm
50-100/0.75 (0.75 kW) - impeller diameter = 114 mm

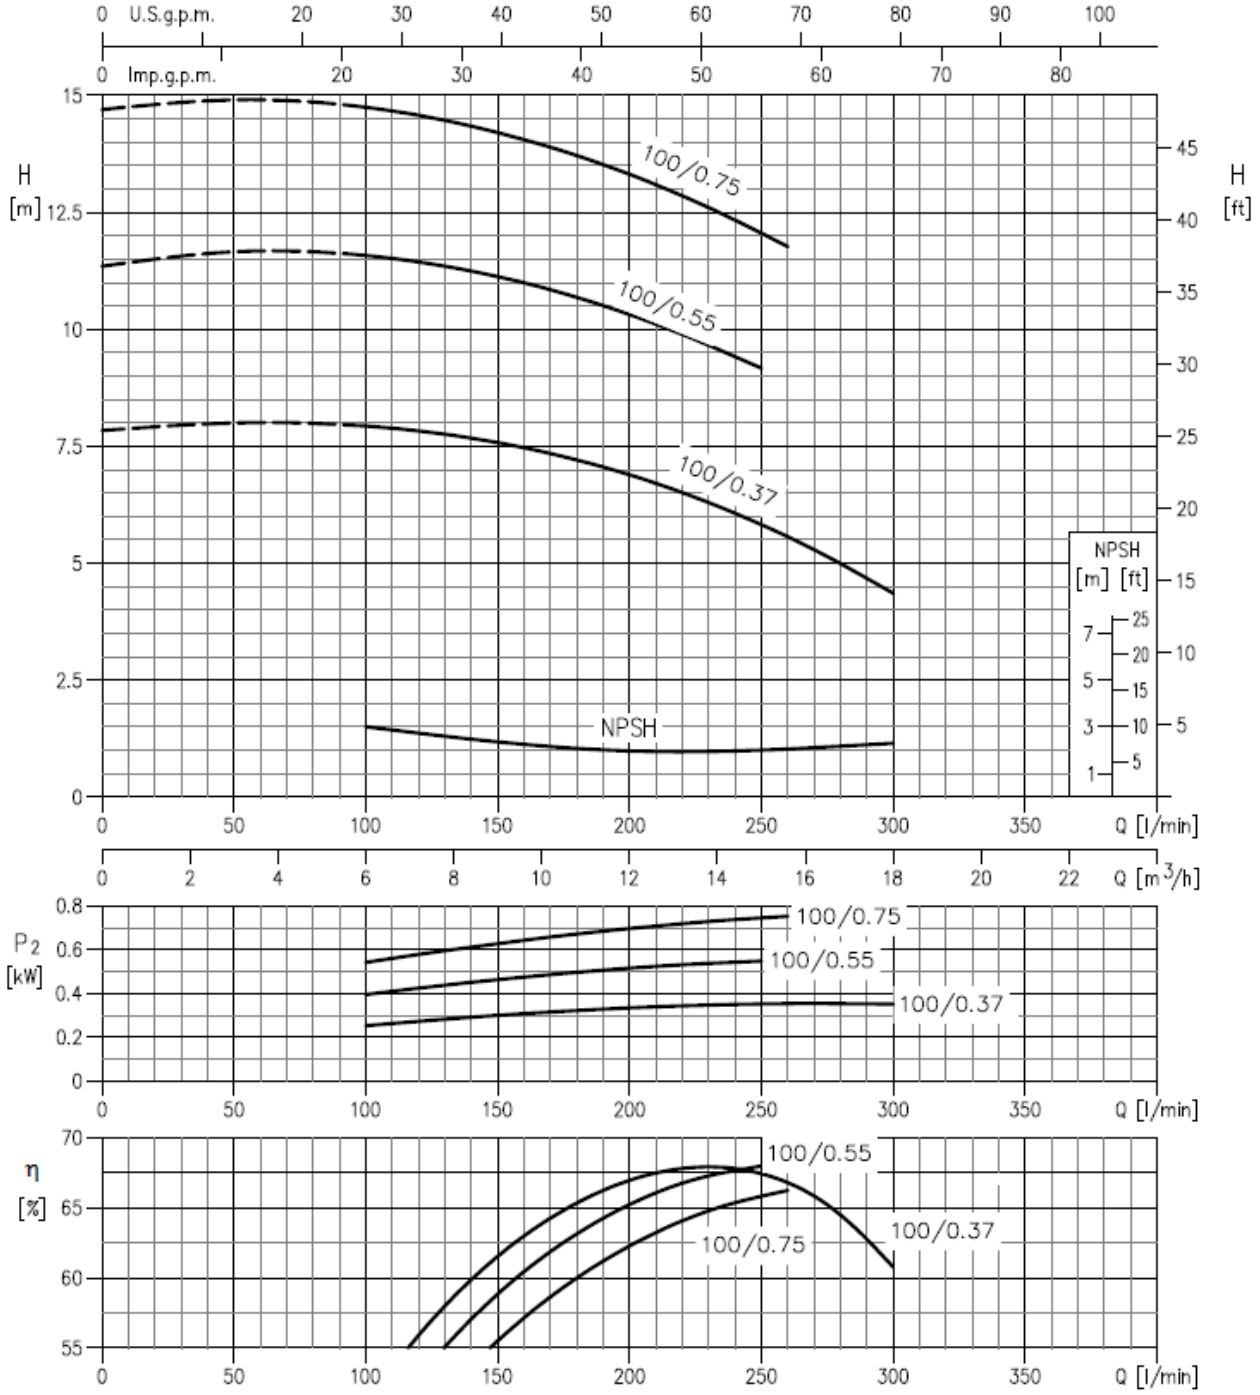

Rotation speed ≈ 2900 min-1
Test standard : ISO 9906 Annex A

PM10U

PERFORMANCE CURVE


50Hz

Rev.0

3E(S) 50-125 **2 POLE**

50-125/1.5 (1.5 kW) - impeller diameter = 125 mm

50-125/2.2 (2.2 kW) - impeller diameter = 140 mm

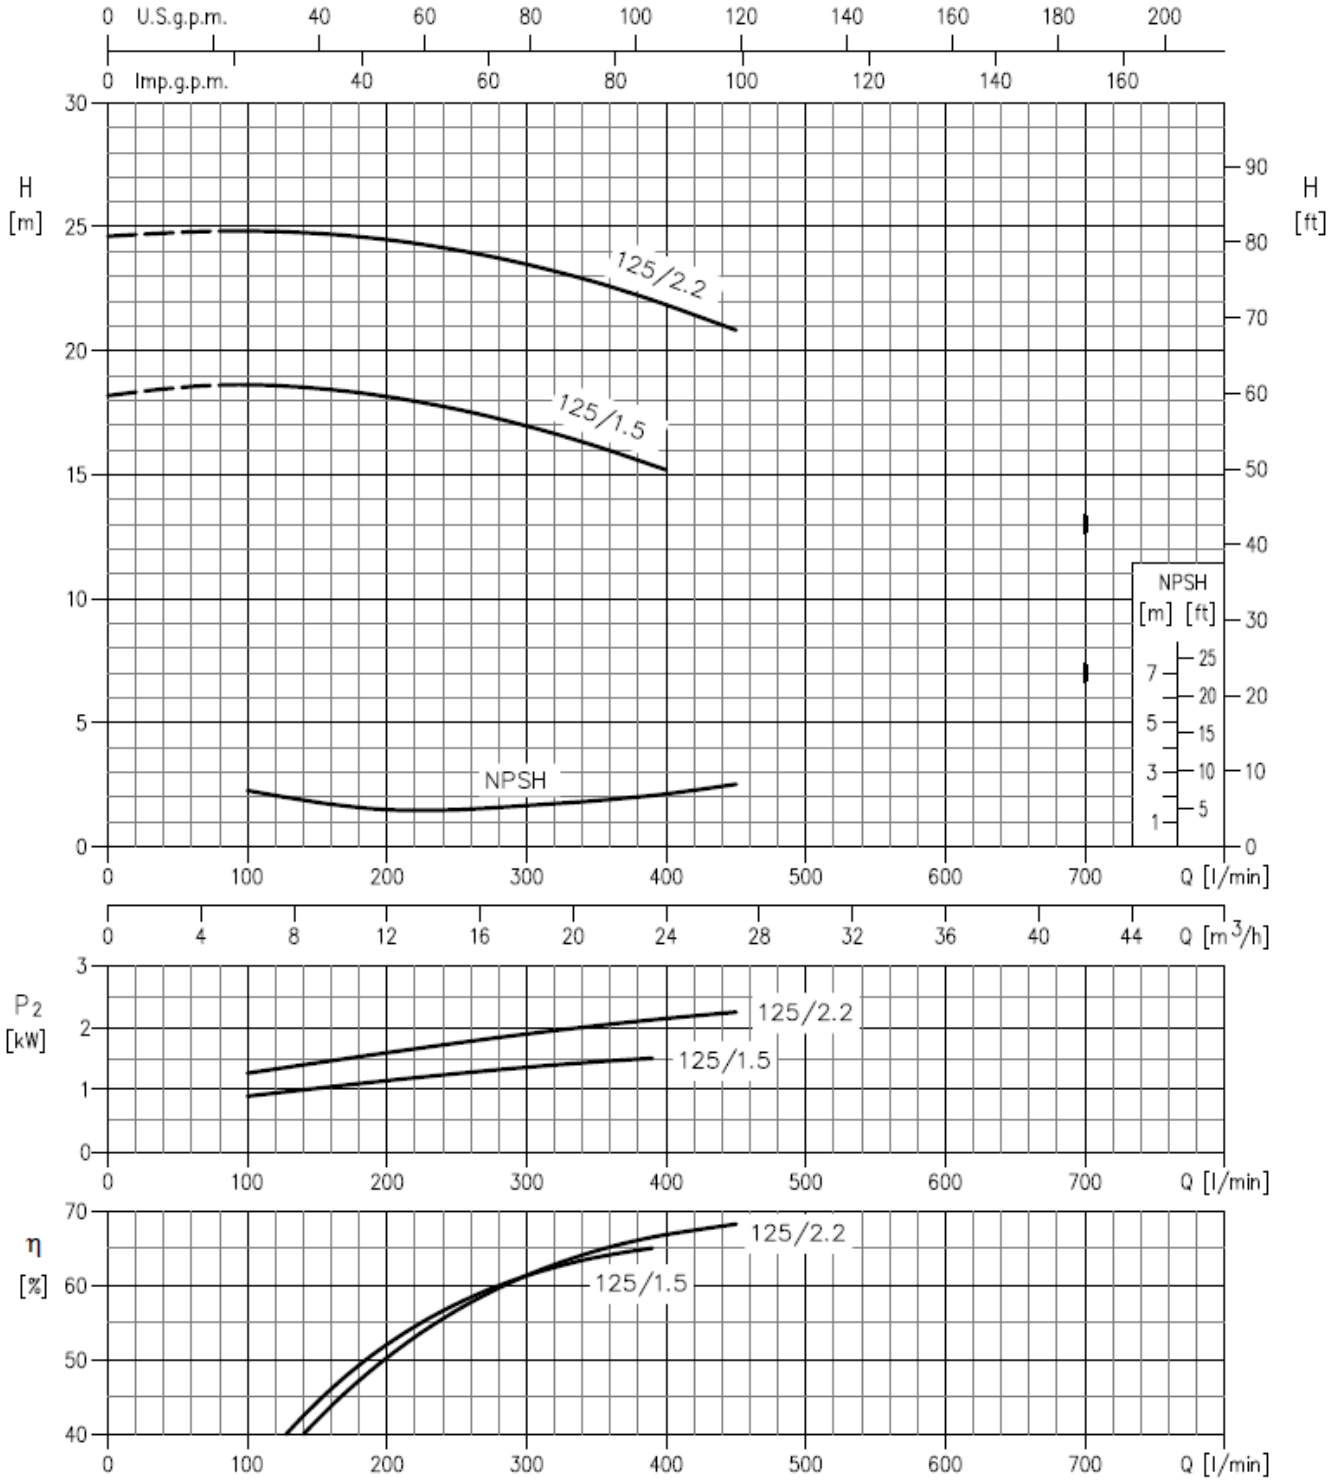

Rotation speed ≈ 2900 min-1

Test standard : ISO 9906 Annex A


PERFORMANCE CURVE

50Hz

Rev.0

3E(S) 50-160 **2 POLE**

50-160/3.0 (3.0 kW) - impeller diameter = 151 mm
50-160/4.0 (4.0 kW) - impeller diameter = 166 mm

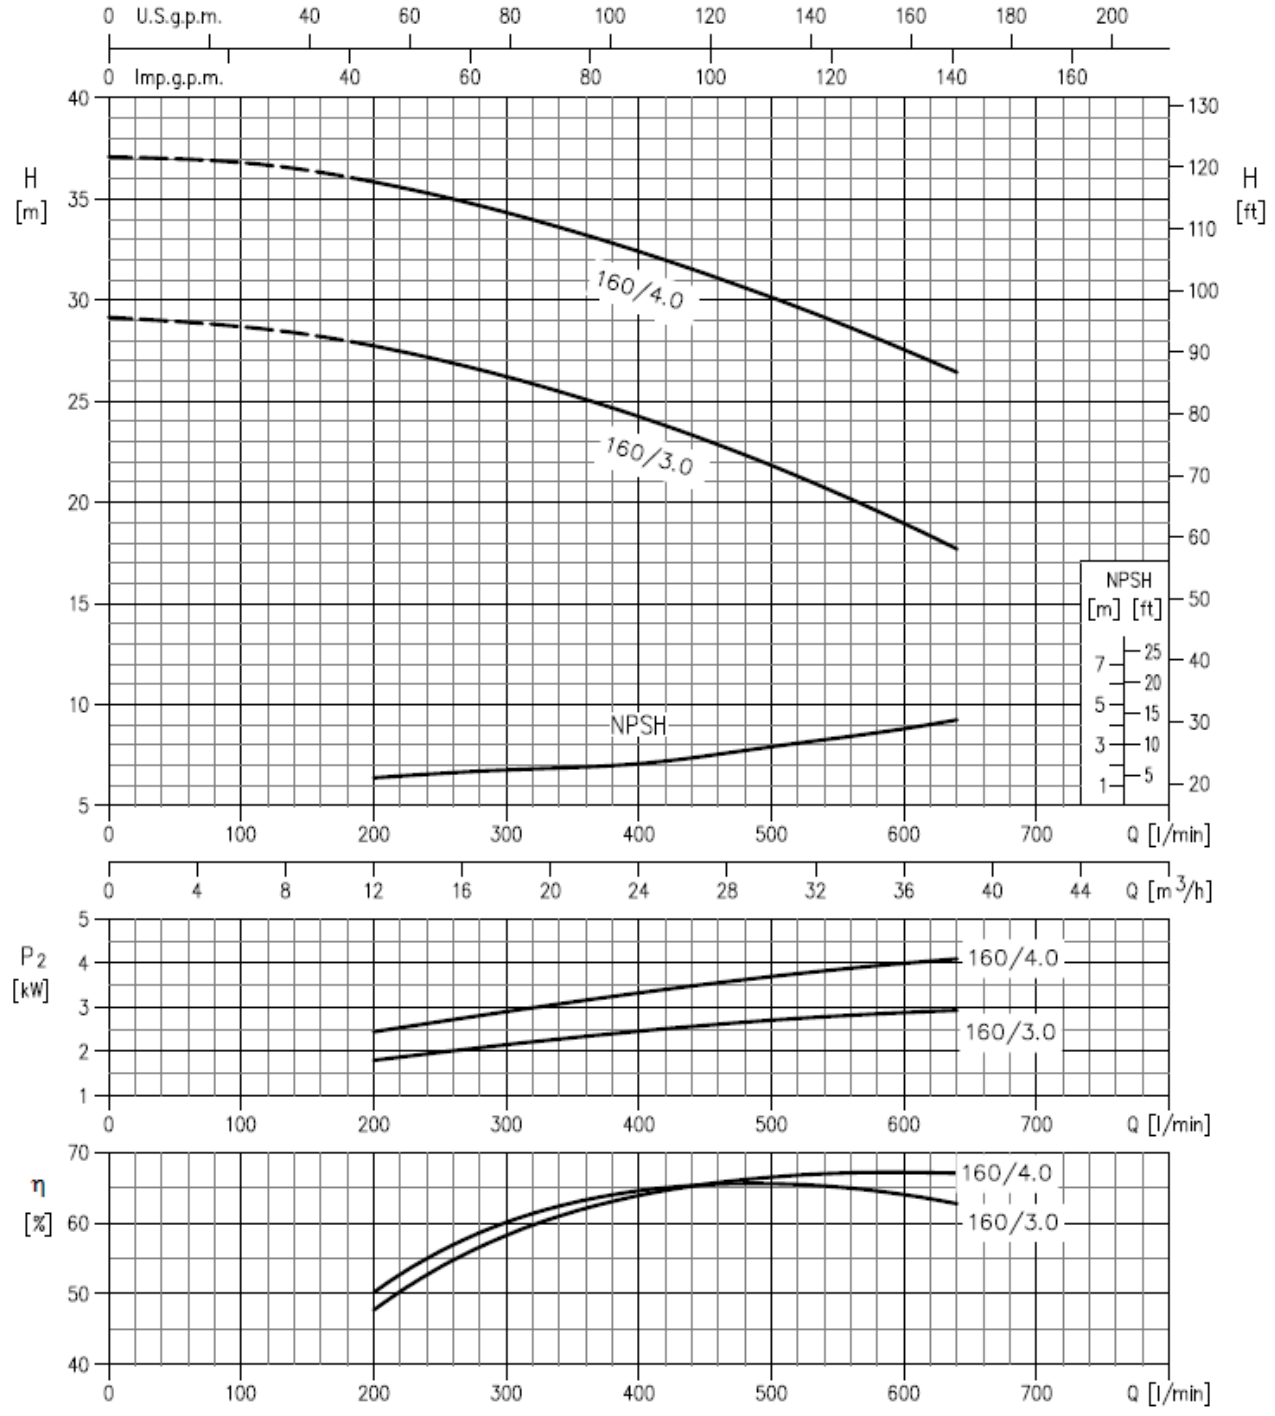

Rotation speed ≈ 2900 min-1
Test standard : ISO 9906 Annex A


PERFORMANCE CURVE

50Hz

Rev.0

3E(S) 50-200 **2 POLE**

50-200/5.5 (5.5 kW) - impeller diameter = 183 mm
50-200/7.5 (7.5 kW) - impeller diameter = 200 mm
50-200/11 (11 kW) - impeller diameter = 224 mm

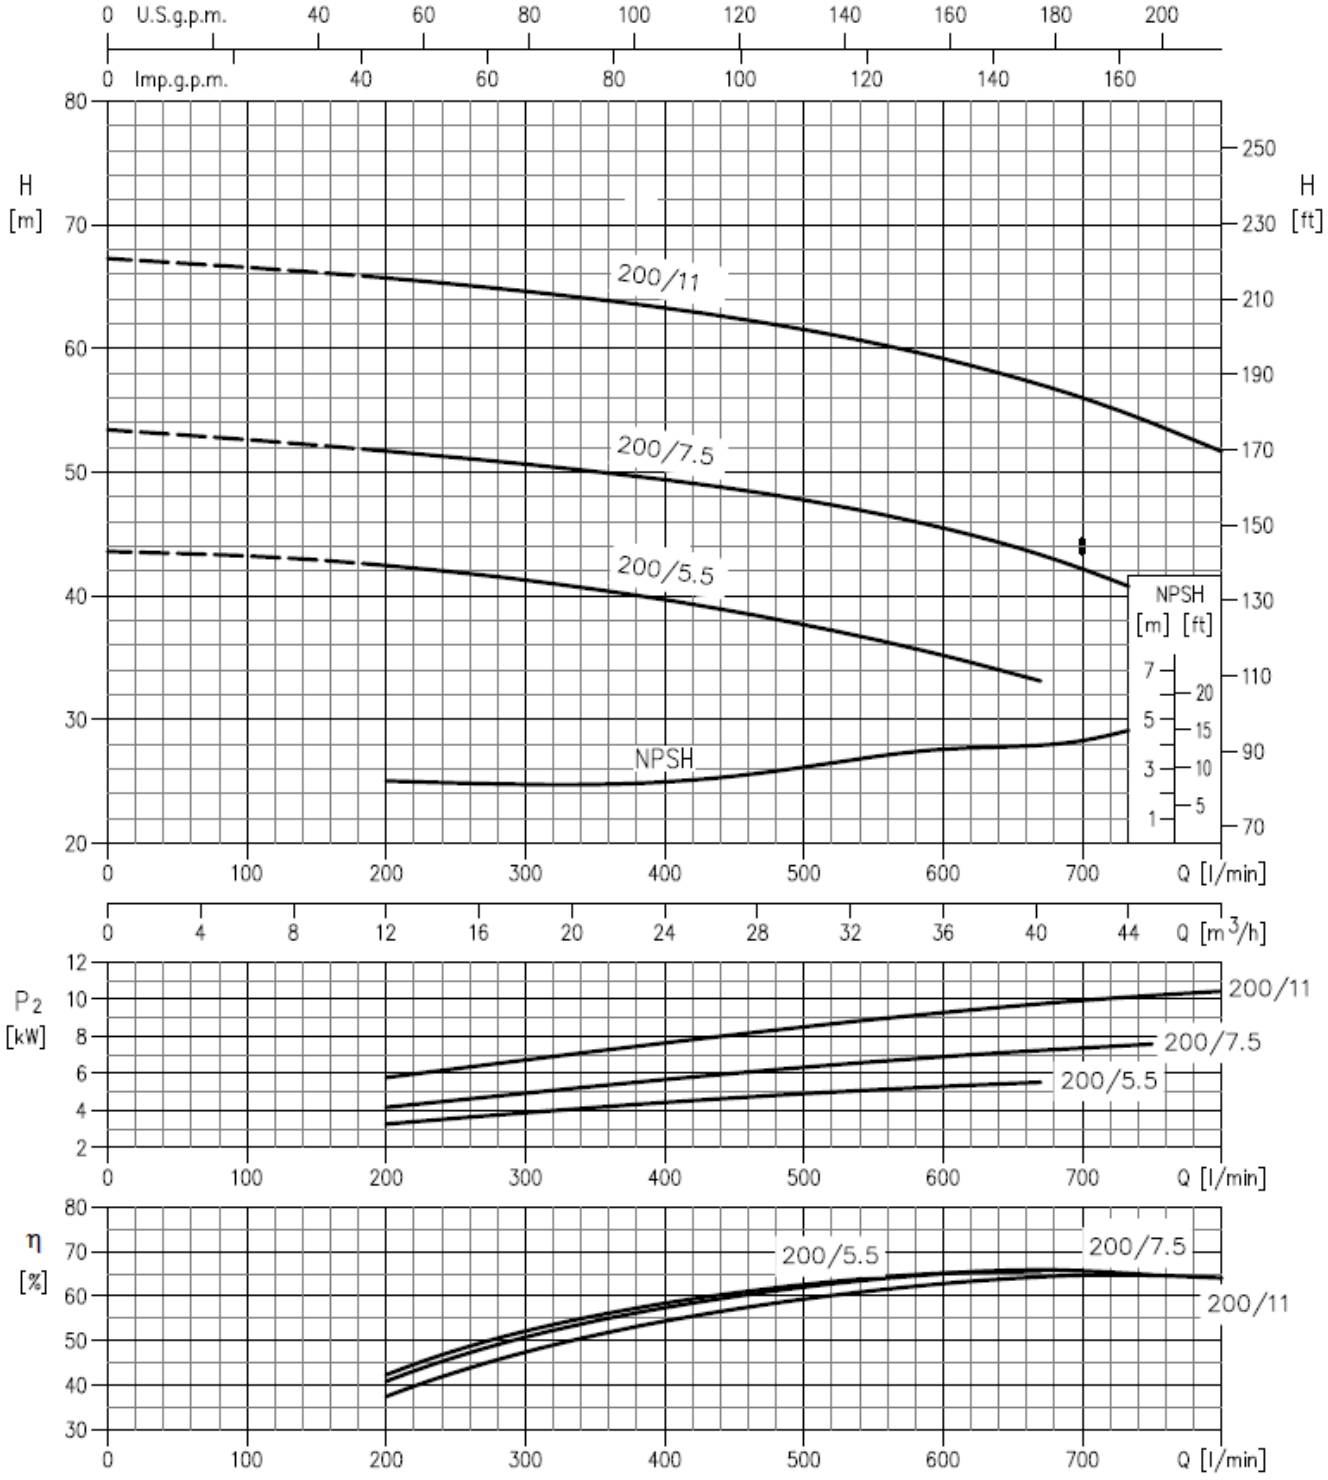

Rotation speed ≈ 2900 min-1
Test standard : ISO 9906 Annex A

EBARA CORPORATION

PM10U


PERFORMANCE CURVE

50Hz

Rev.0

3E(S) 65-100 **2 POLE**

65-100/0.55 (0.55 kW) - impeller diameter = 88 mm
65-100/0.75 (0.75 kW) - impeller diameter = 94 mm
65-100/1.1 (1.1 kW) - impeller diameter = 104 mm
65-100/1.5 (1.5 kW) - impeller diameter = 114 mm

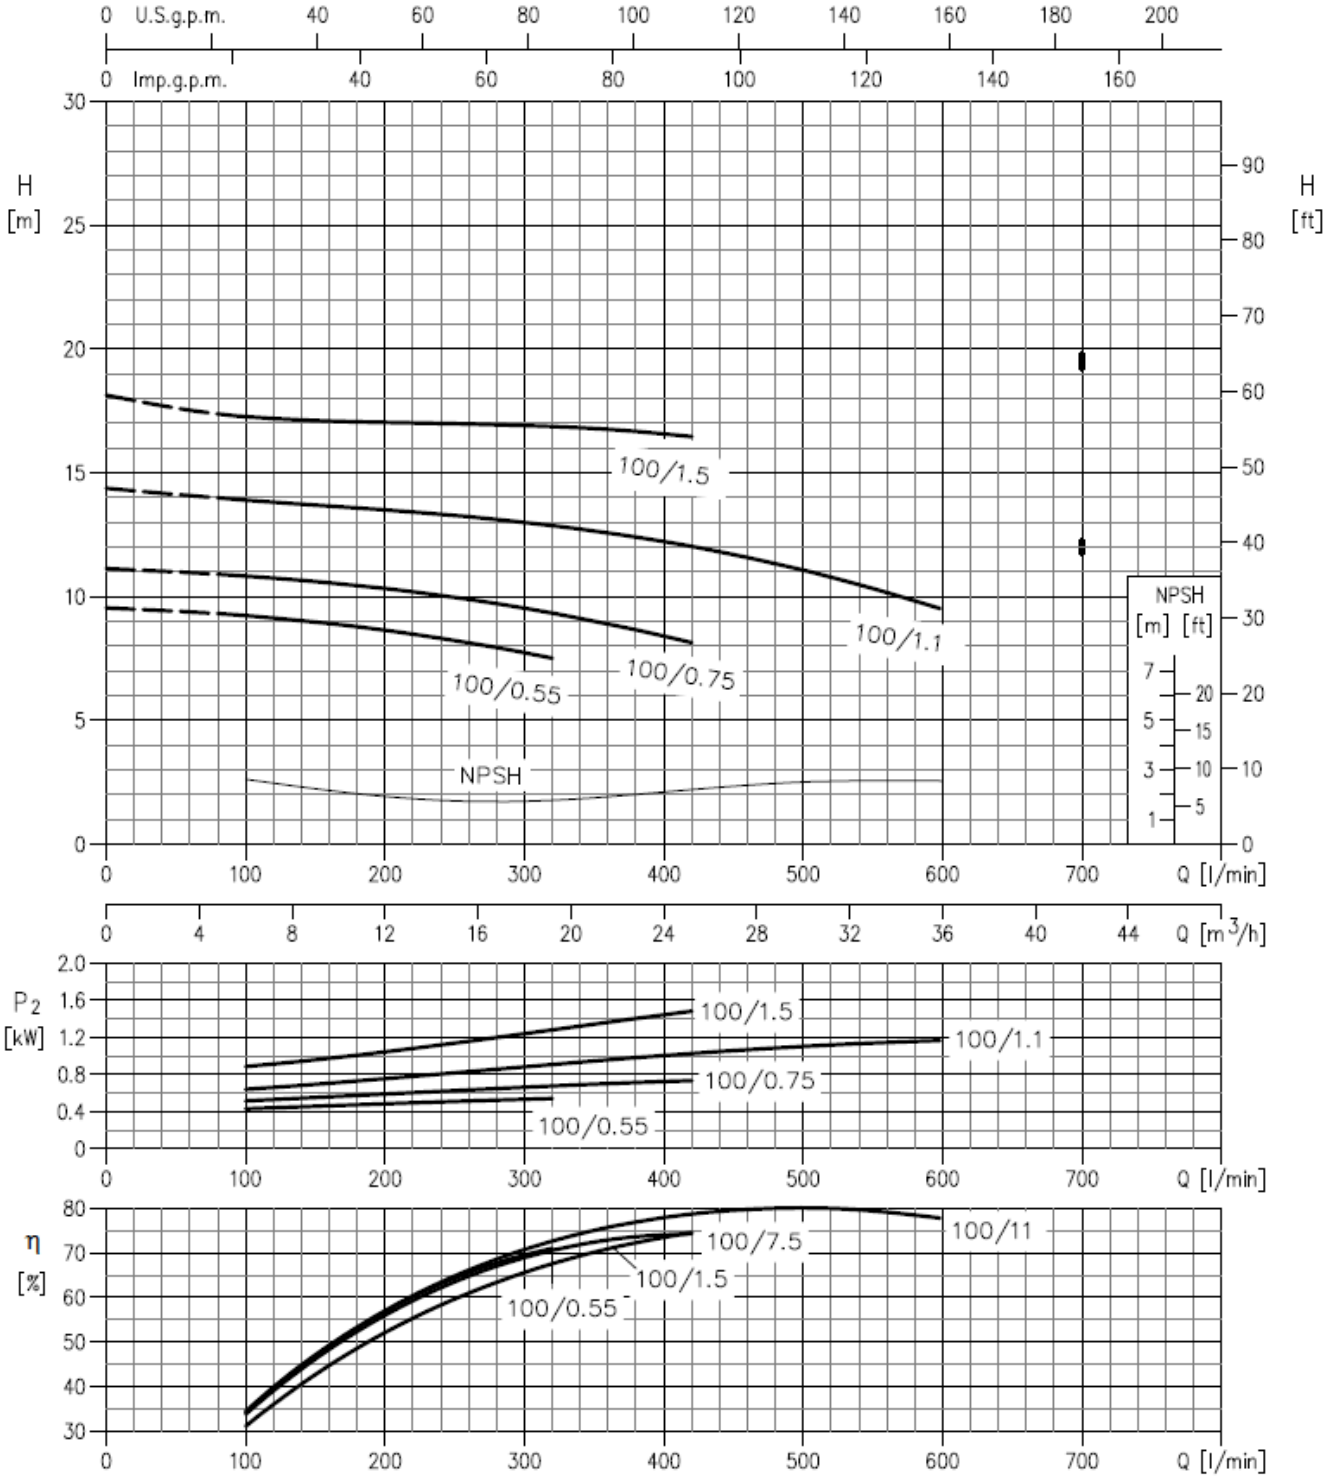

Rotation speed ≈ 2900 min-1
Test standard : ISO 9906 Annex A

EBARA CORPORATION

PM10U


PERFORMANCE CURVE

50Hz

Rev.0

3E(S) 65-200 **2 POLE**

65-200/9.2 (9.2 kW) - impeller diameter = 191 mm
65-200/11 (11 kW) - impeller diameter = 200 mm
65-200/15 (15 kW) - impeller diameter = 224 mm

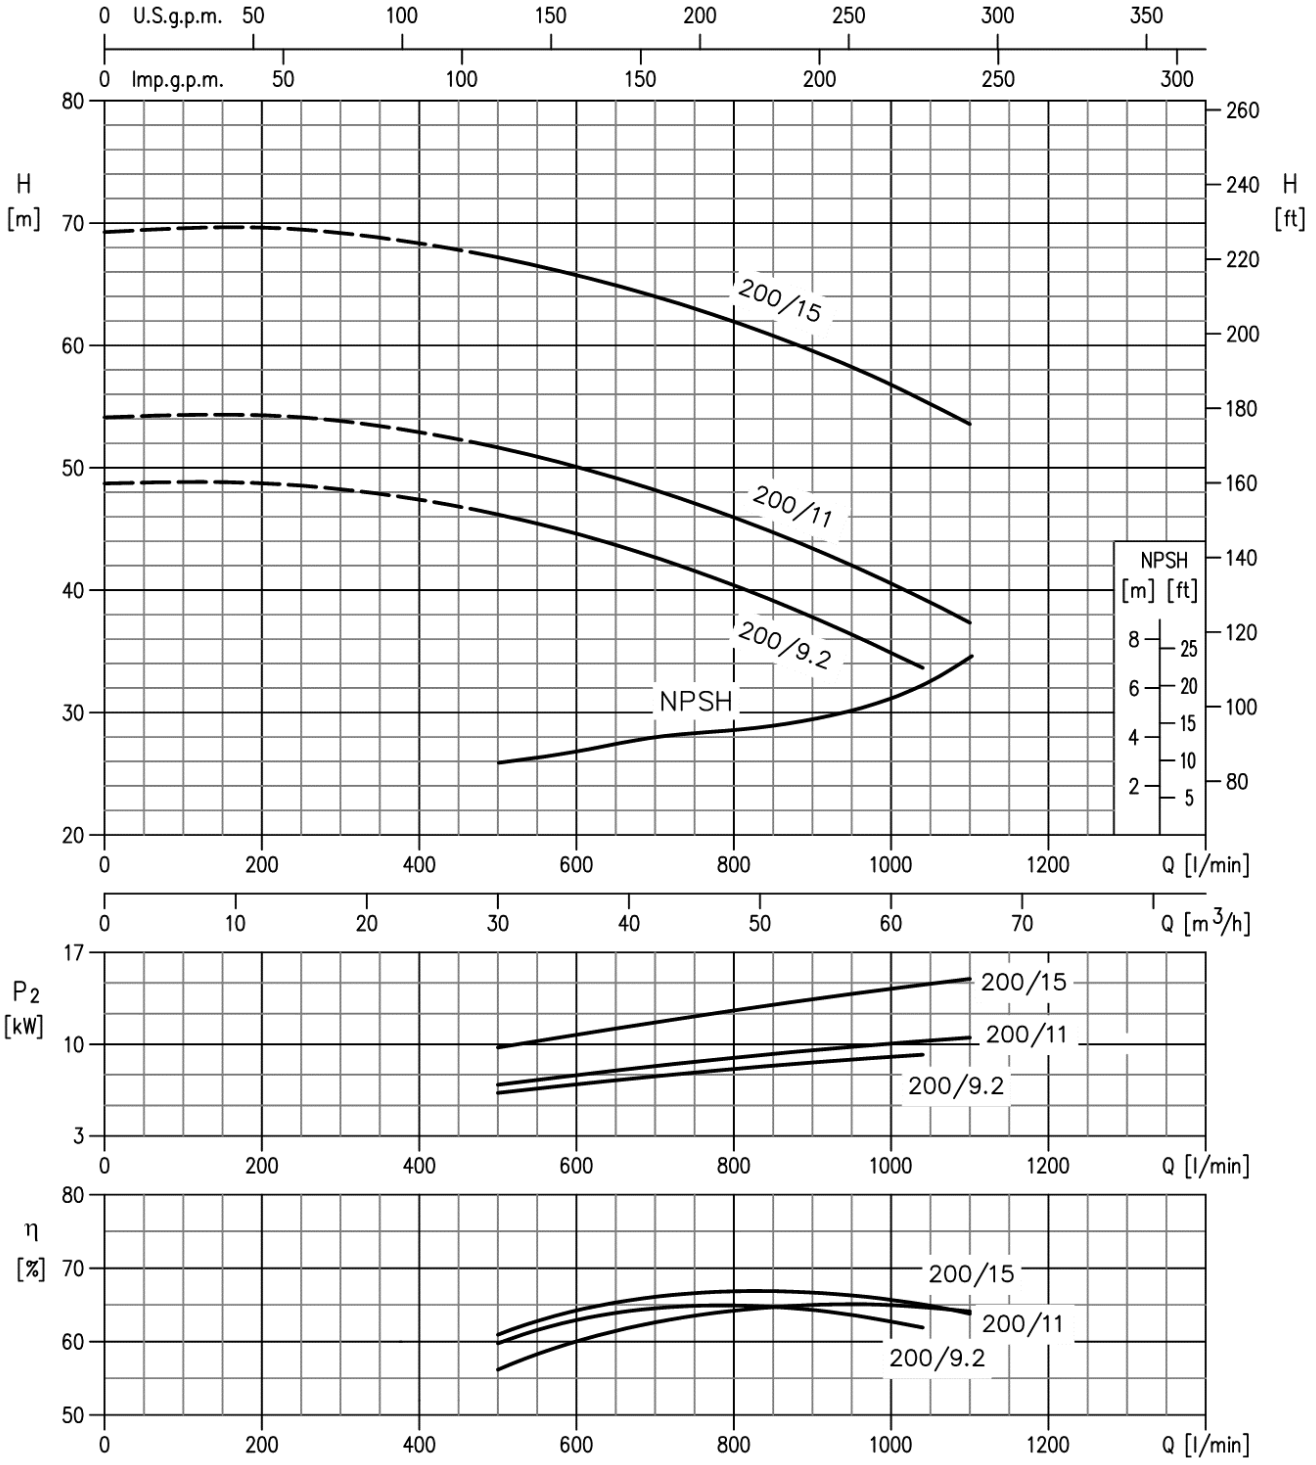

Rotation speed ≈ 2900 min-1
Test standard : ISO 9906 Annex A

EBARA CORPORATION

PM10U

PERFORMANCE CURVE


50Hz

Rev.0

3E(S) 80-100 **2 POLE**

80-100/1.5 (1.5 kW) - impeller diameter = 103 mm

80-100/2.2 (2.2 kW) - impeller diameter = 110 mm

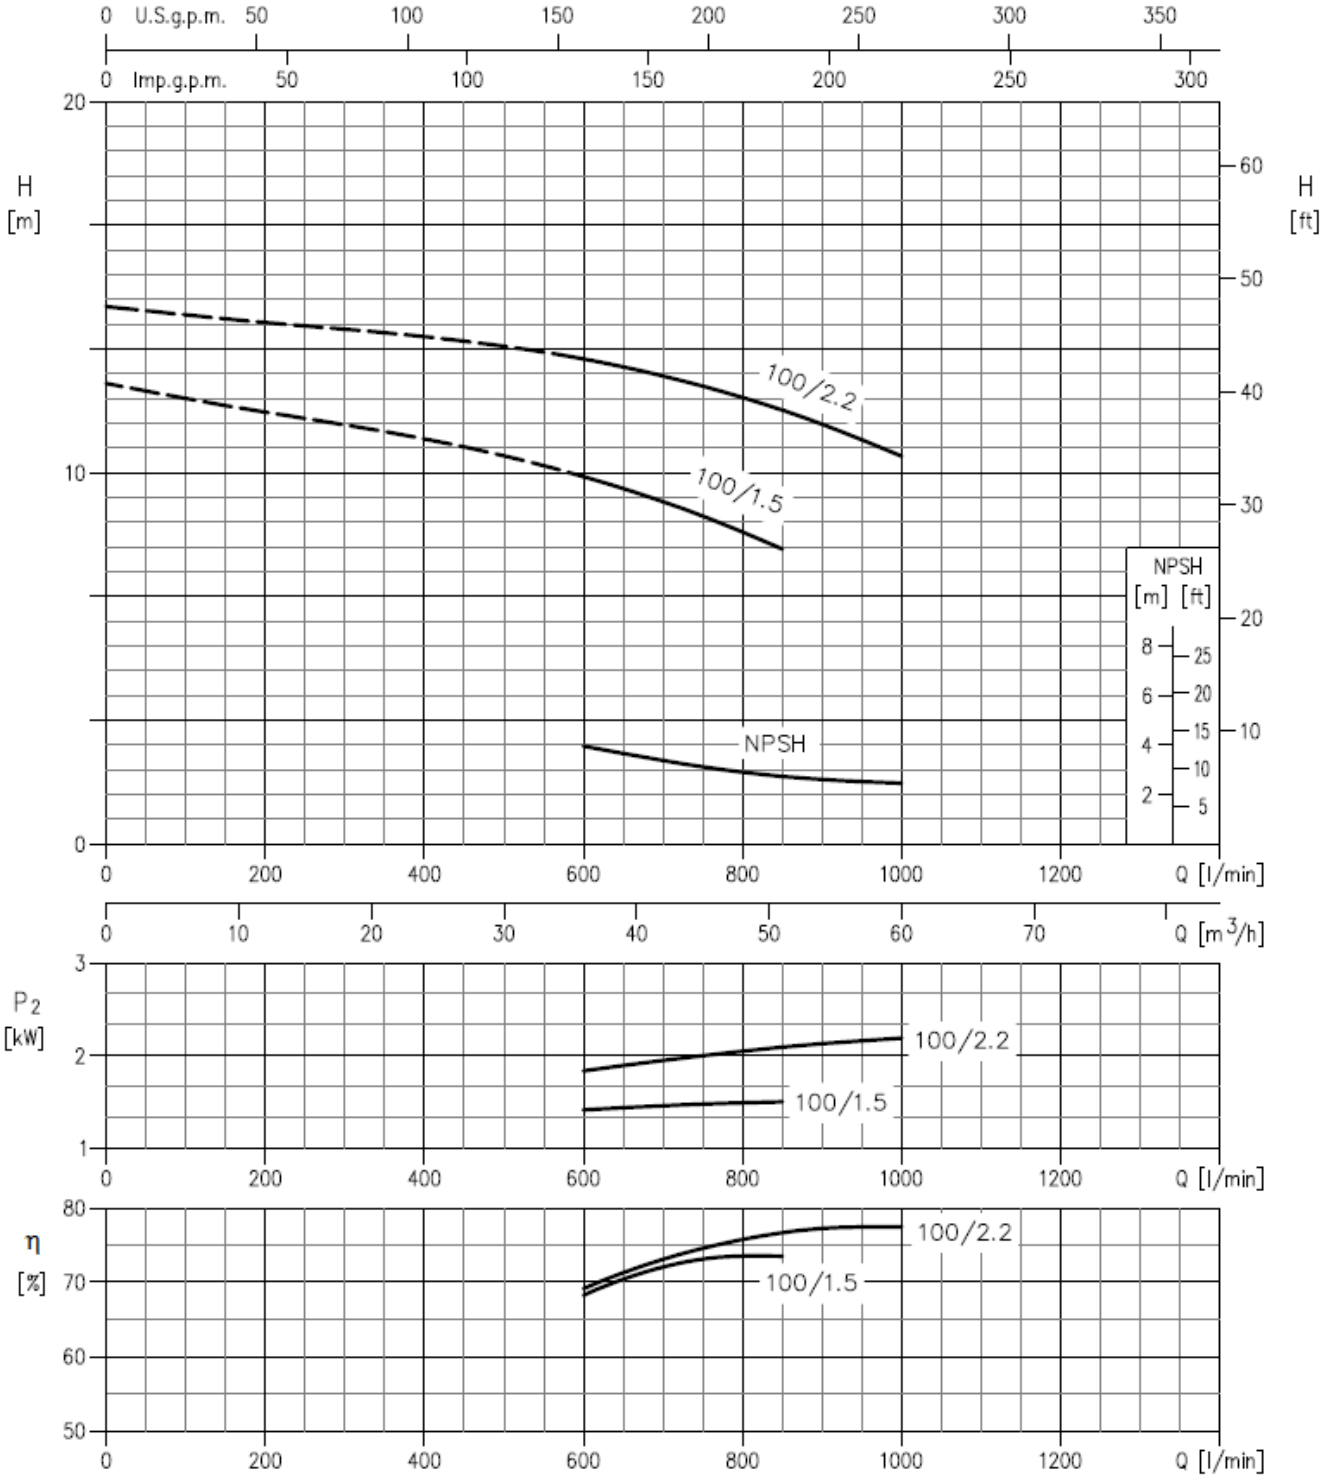

Rotation speed ≈ 2900 min-1

Test standard : ISO 9906 Annex A


PERFORMANCE CURVE

50Hz

Rev.0

3E(S) 80-160 **2 POLE**

80-160/9.2 (9.2 kW) - impeller diameter = 160 mm
80-160/11 (11 kW) - impeller diameter = 168 mm
80-160/15 (15 kW) - impeller diameter = 178 mm

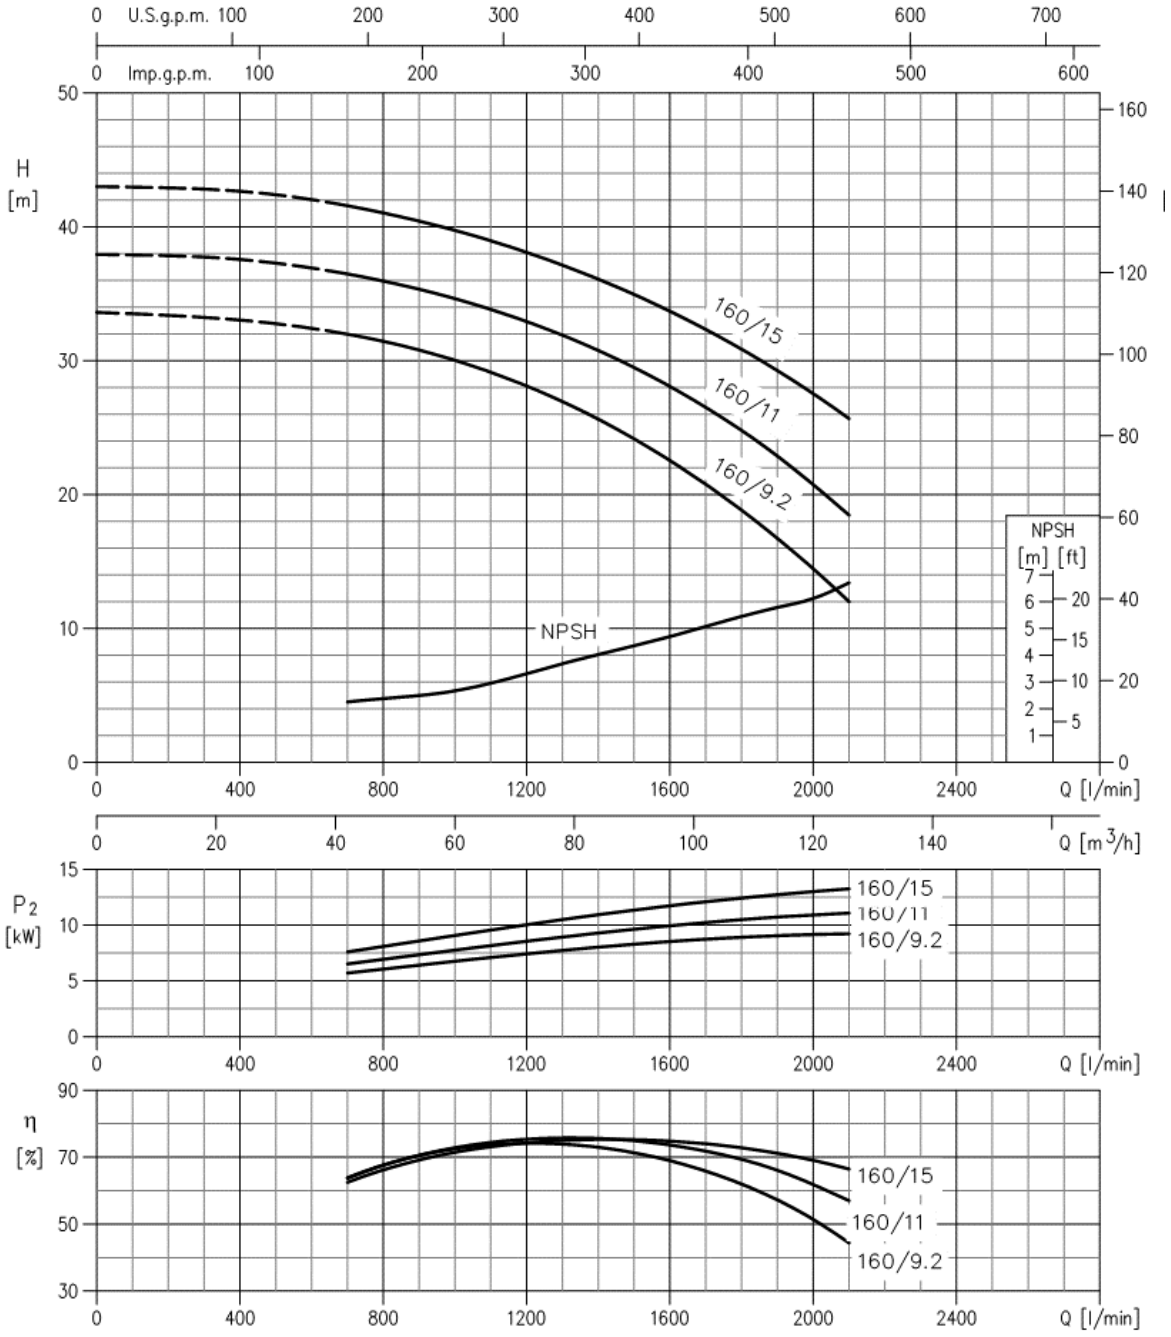

Rotation speed ≈ 2900 min-1
Test standard : ISO 9906 Annex A

EBARA CORPORATION

PM10U


PERFORMANCE CURVE

50Hz

Rev.0

3E(S) 80-200 **2 POLE**

80-200/18.5 (18.5 kW) - impeller diameter = 201 mm
80-200/22 (22 kW) - impeller diameter = 212 mm

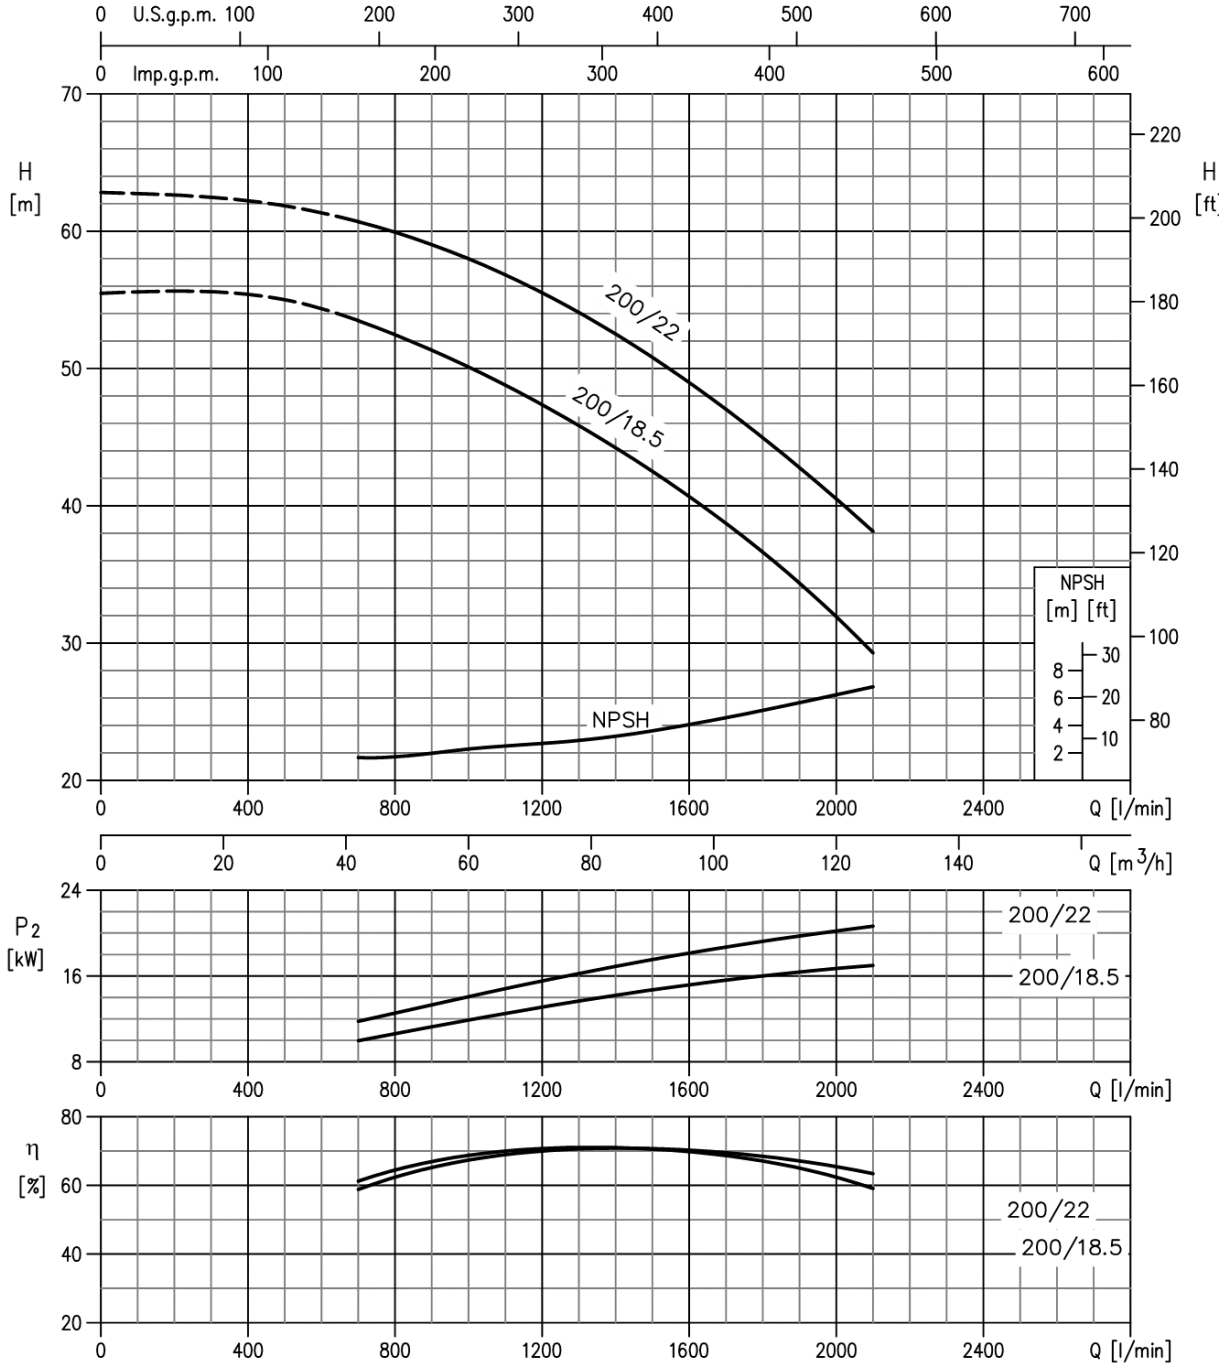

Rotation speed ≈ 2900 min-1
Test standard : ISO 9906 Annex A


PERFORMANCE CURVE

50Hz

Rev.0

3E(S) 100-160 **2 POLE**

100-160/11 (11 kW) - impeller diameter = 154 mm
100-160/15 (15 kW) - impeller diameter = 165 mm
100-160/18.5 (18.5 kW) - impeller diameter = 174 mm

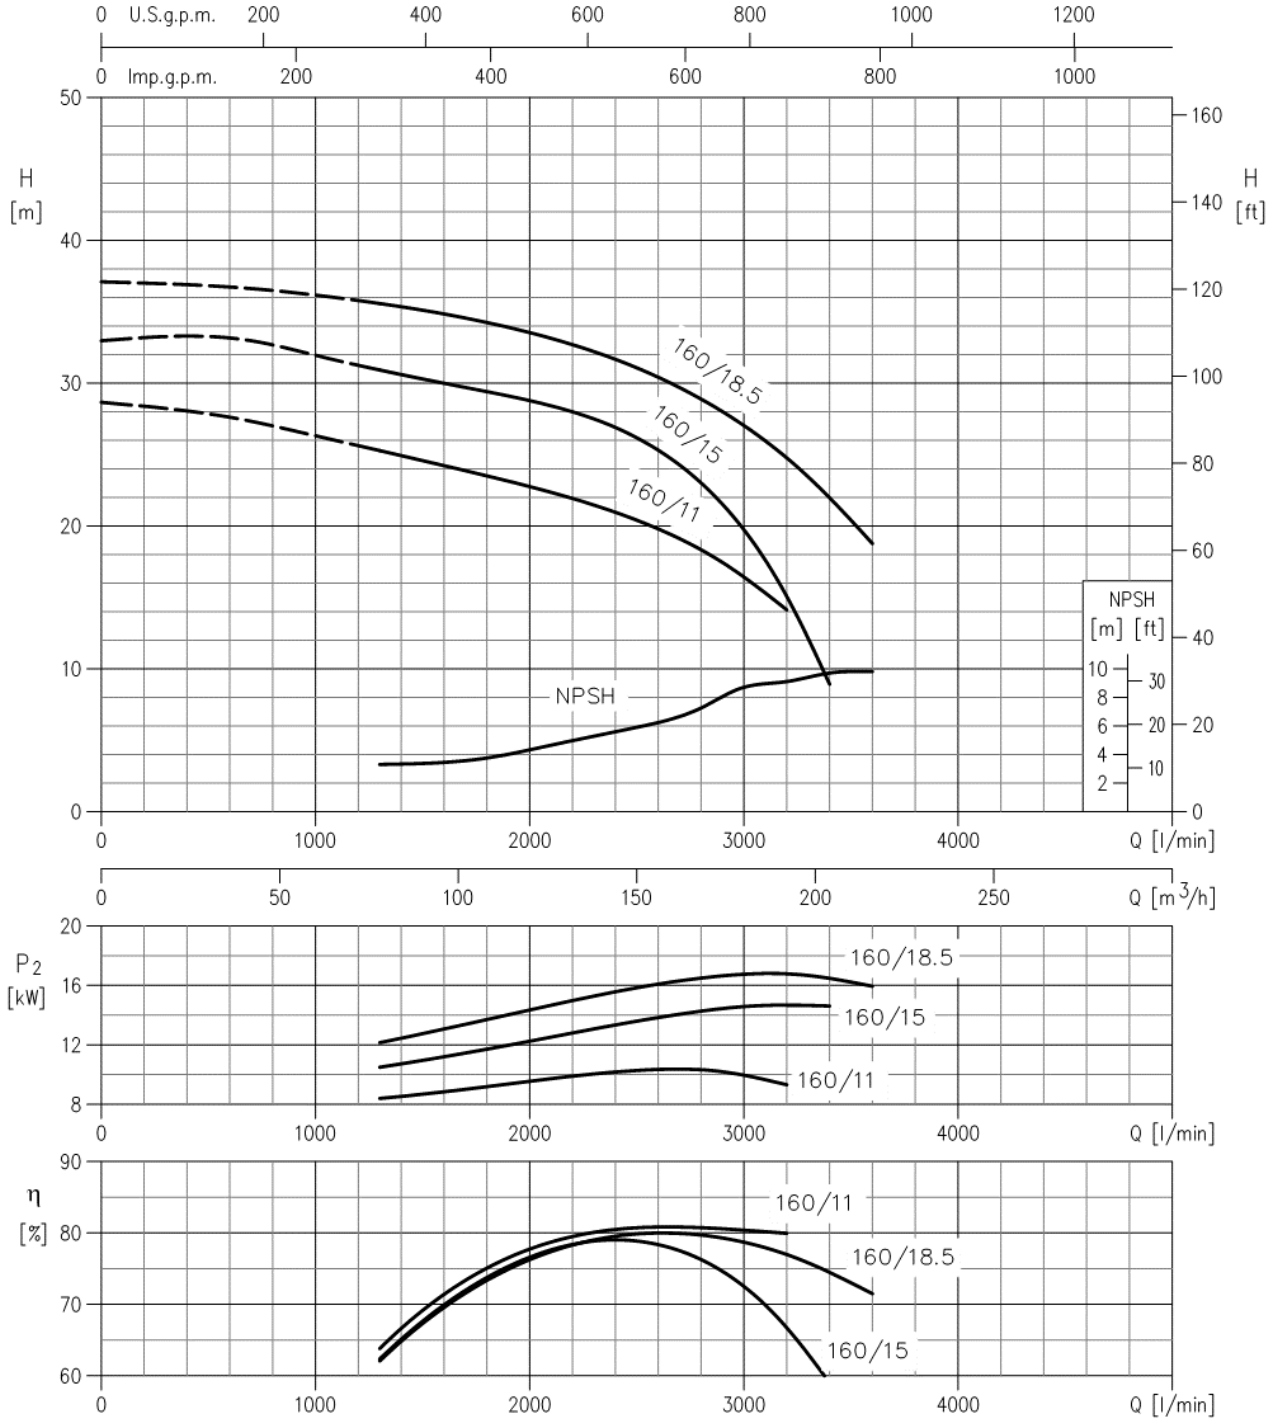

Rotation speed ≈ 2900 min-1
Test standard : ISO 9906 Annex A

EBARA CORPORATION

PM10U


PERFORMANCE CURVE

50Hz

Rev.0

3E(S) 40-200 **4 POLE**

40-200/0.55 (0.55 kW) - impeller diameter = 200mm
40-200/0.75 (0.75 kW) - impeller diameter = 224mm

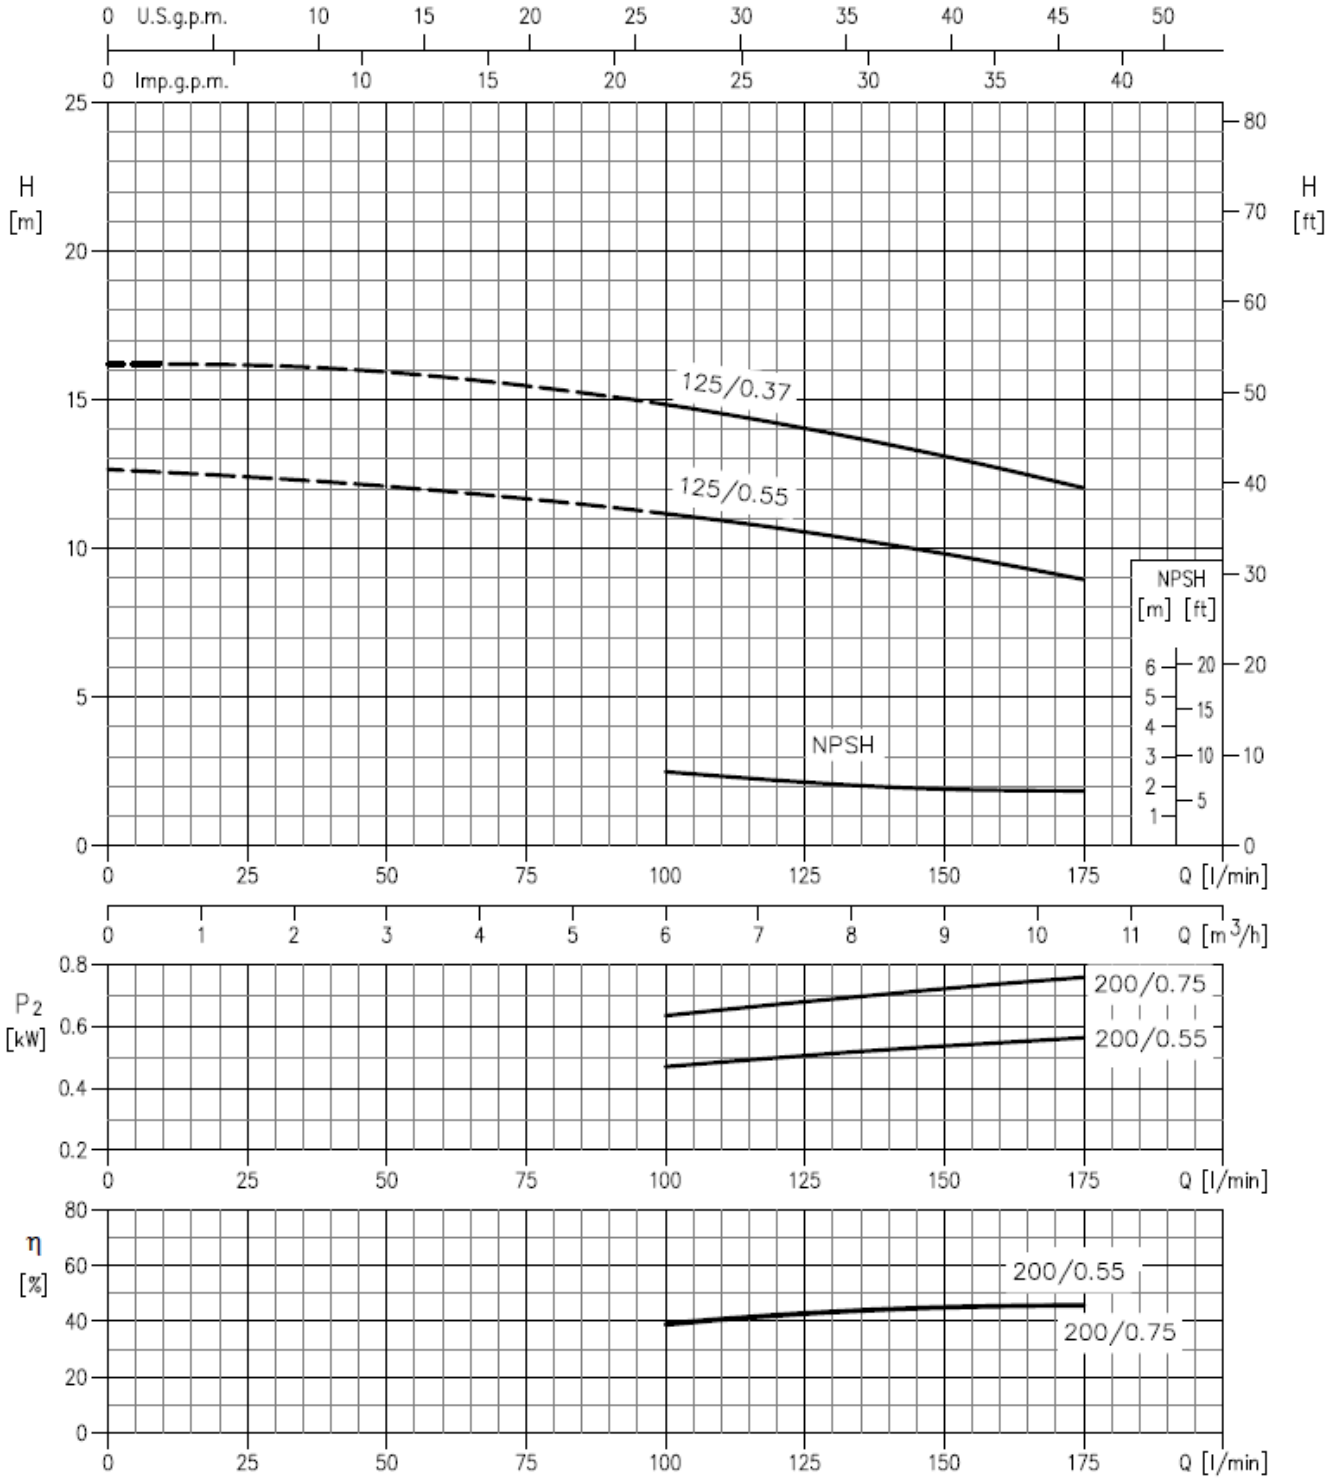

Rotation speed ≈ 1450 min-1
Test standard : ISO 9906 Annex A

EBARA CORPORATION

PM10U


PERFORMANCE CURVE

50Hz

Rev.0

3E(S) 50-125 **4 POLE**

50-125/0.37 (0.37 kW) - impeller diameter = 140 mm

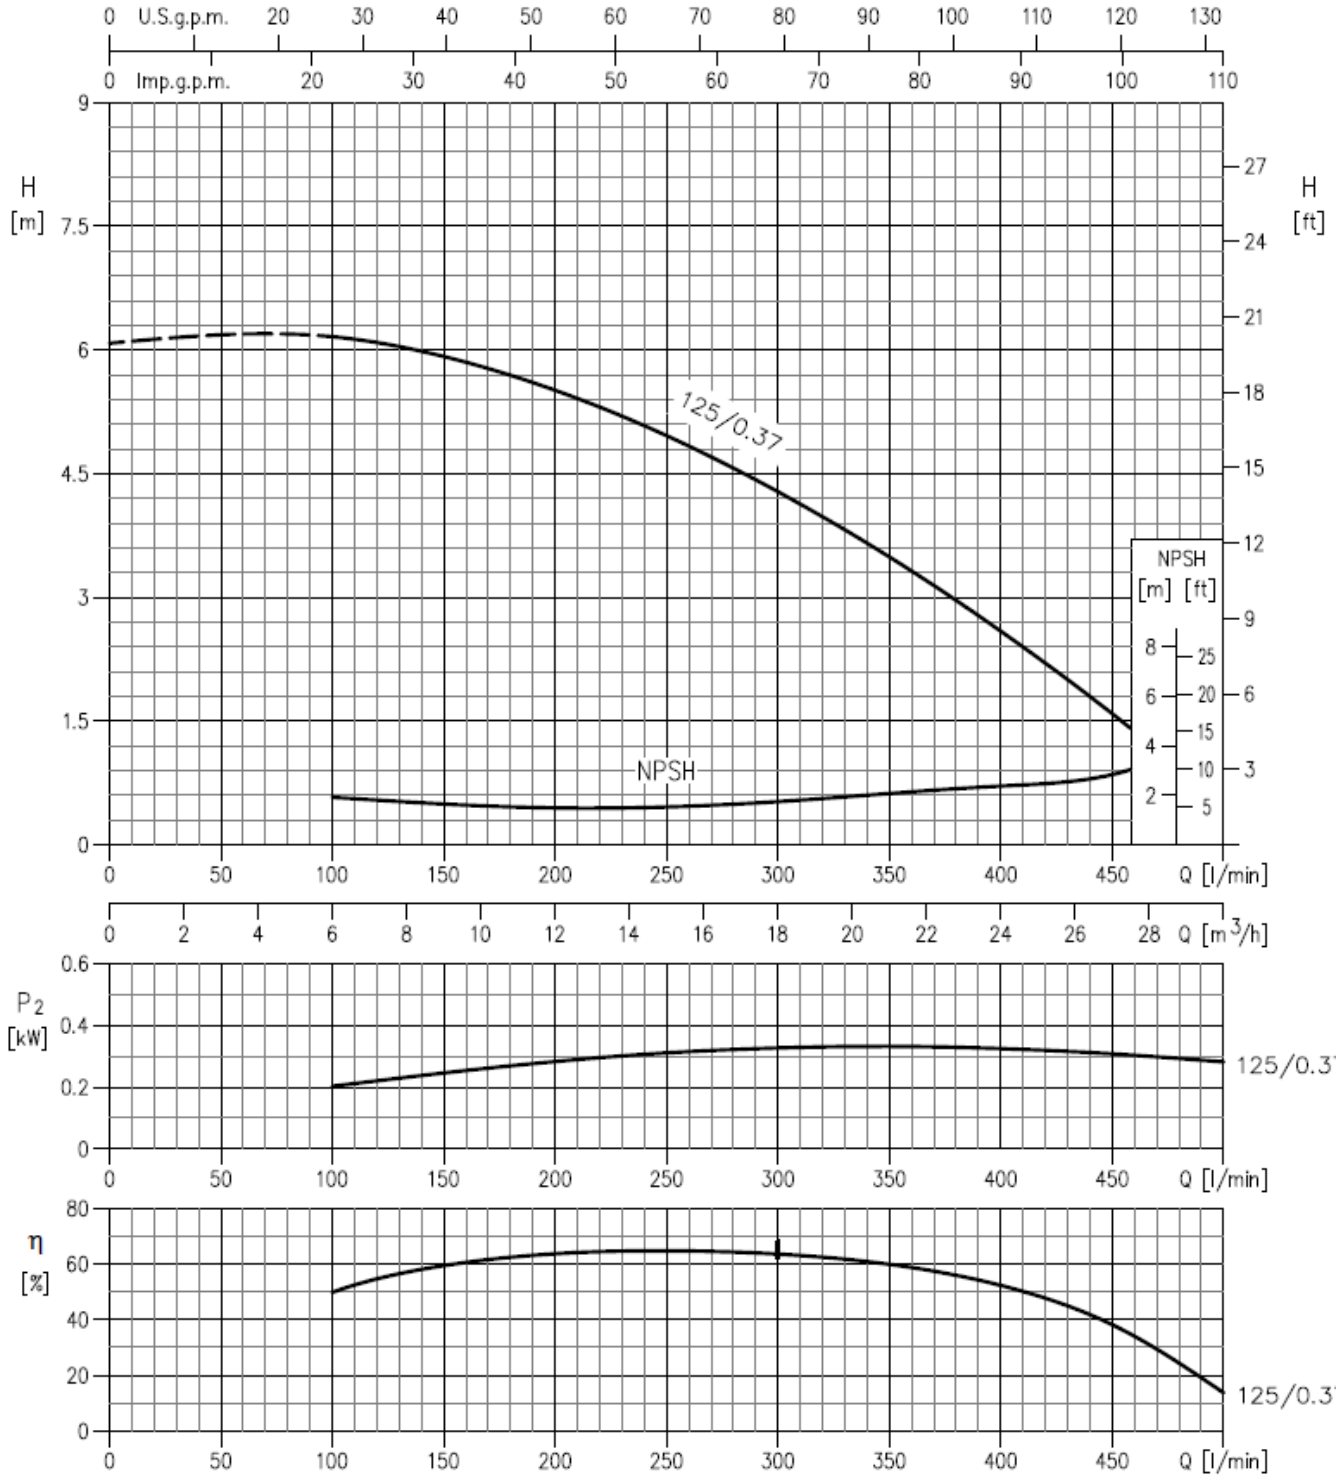

Rotation speed ≈ 1450 min-1
Test standard : ISO 9906 Annex A


PERFORMANCE CURVE

50Hz

Rev.0

3E(S) 50-200 **4 POLE**

50-200/0.75 (0.75 kW) - impeller diameter = 183 mm
50-200/1.1 (1.1 kW) - impeller diameter = 200 mm
50-200/1.5 (1.5 kW) - impeller diameter = 224 mm

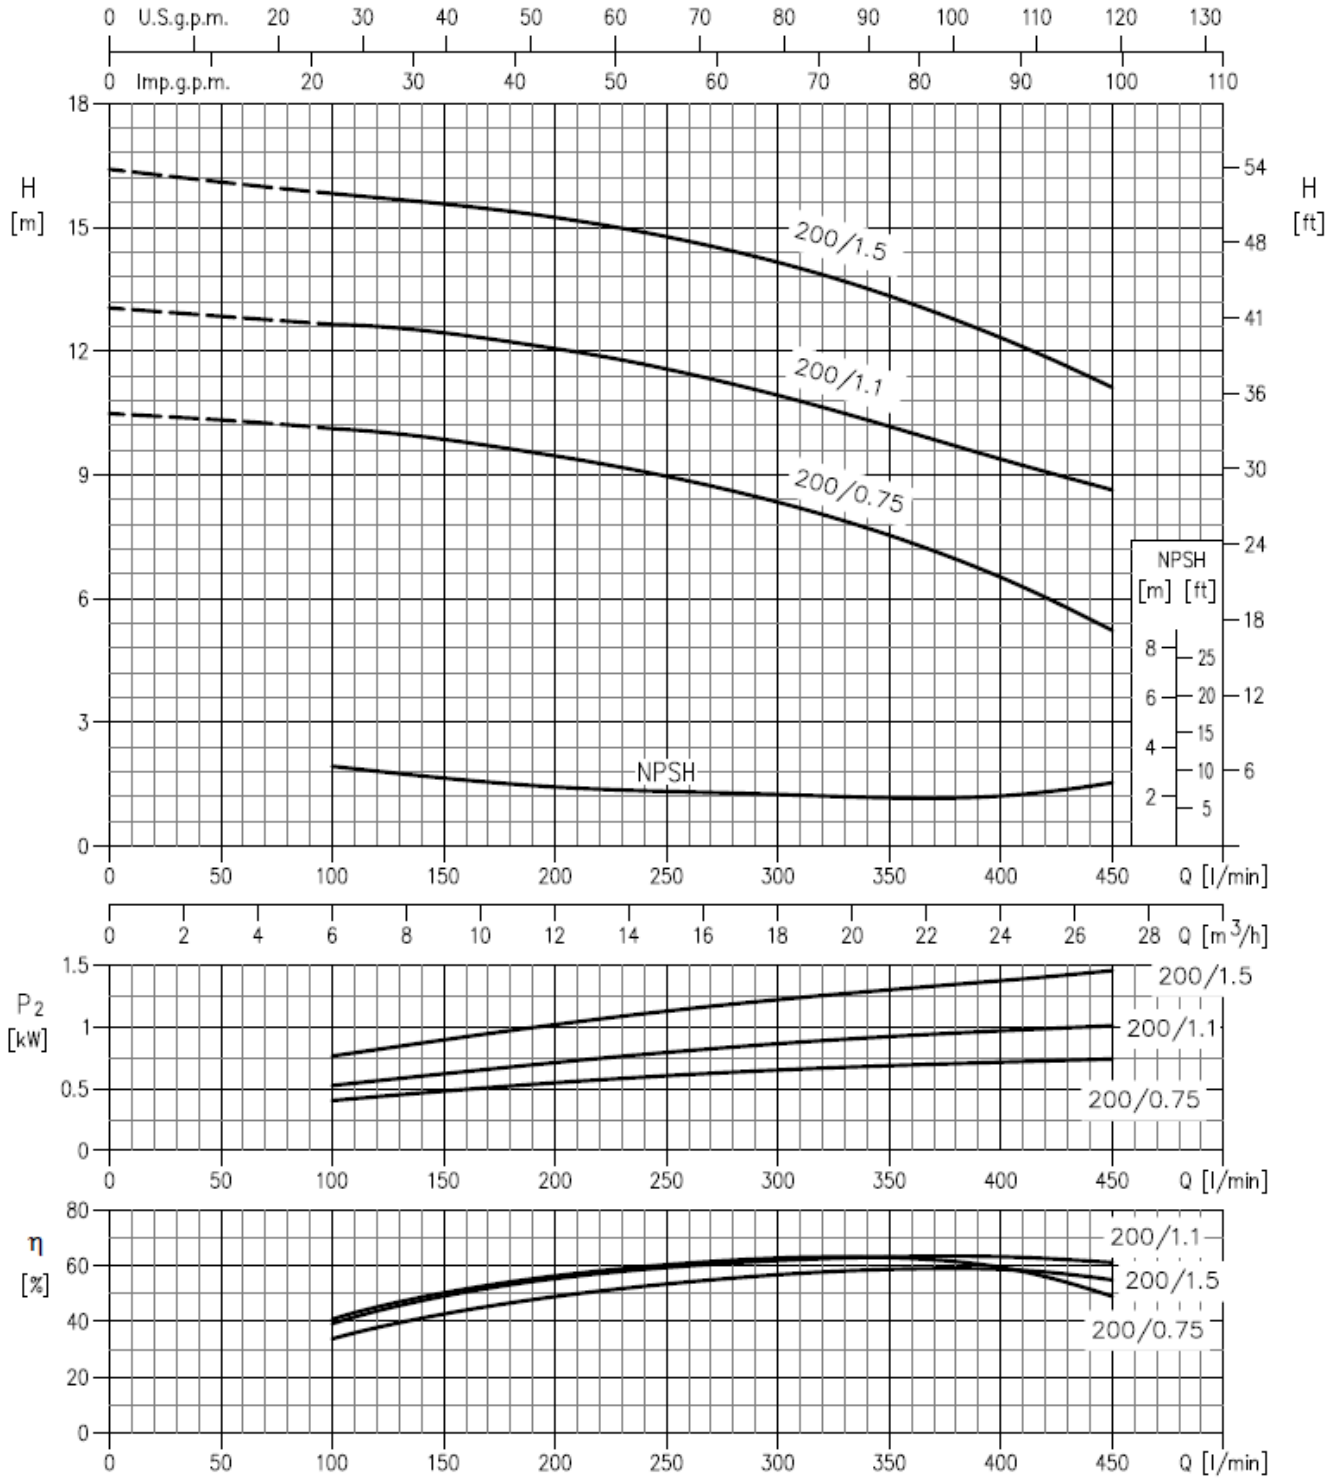

Rotation speed ≈ 1450 min-1
Test standard : ISO 9906 Annex A

EBARA CORPORATION

PM10U

PERFORMANCE CURVE


50Hz

Rev.0

3E(S) 65-160 **4 POLE**

65-160/0.75 (0.75 kW) - impeller diameter = 154 mm

65-160/1.1 (1.1 kW) - impeller diameter = 166 mm

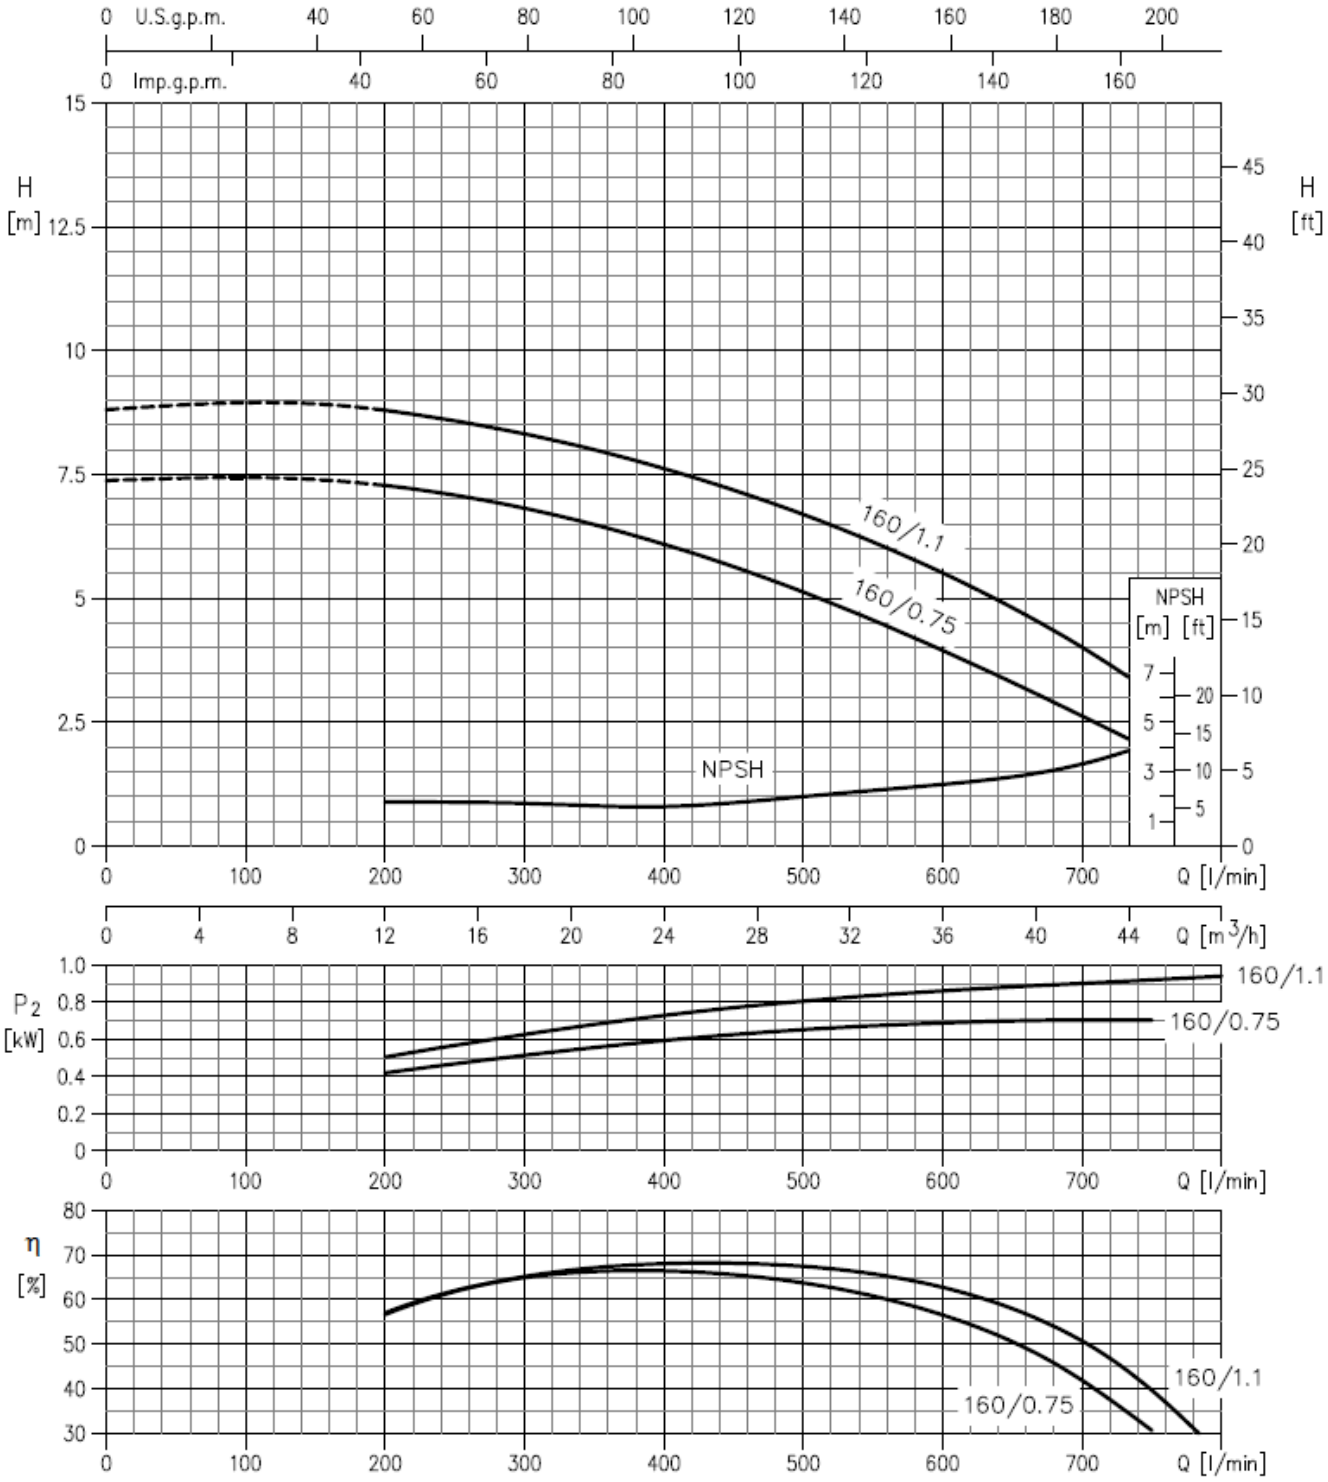

Rotation speed ≈ 1450 min-1

Test standard : ISO 9906 Annex A

PERFORMANCE CURVE


50Hz

Rev.0

3E(S) 80-200 **4 POLE**

80-200/2.2 (2.2 kW) - impeller diameter = 201 mm

80-200/3.0 (3.0 kW) - impeller diameter = 212 mm

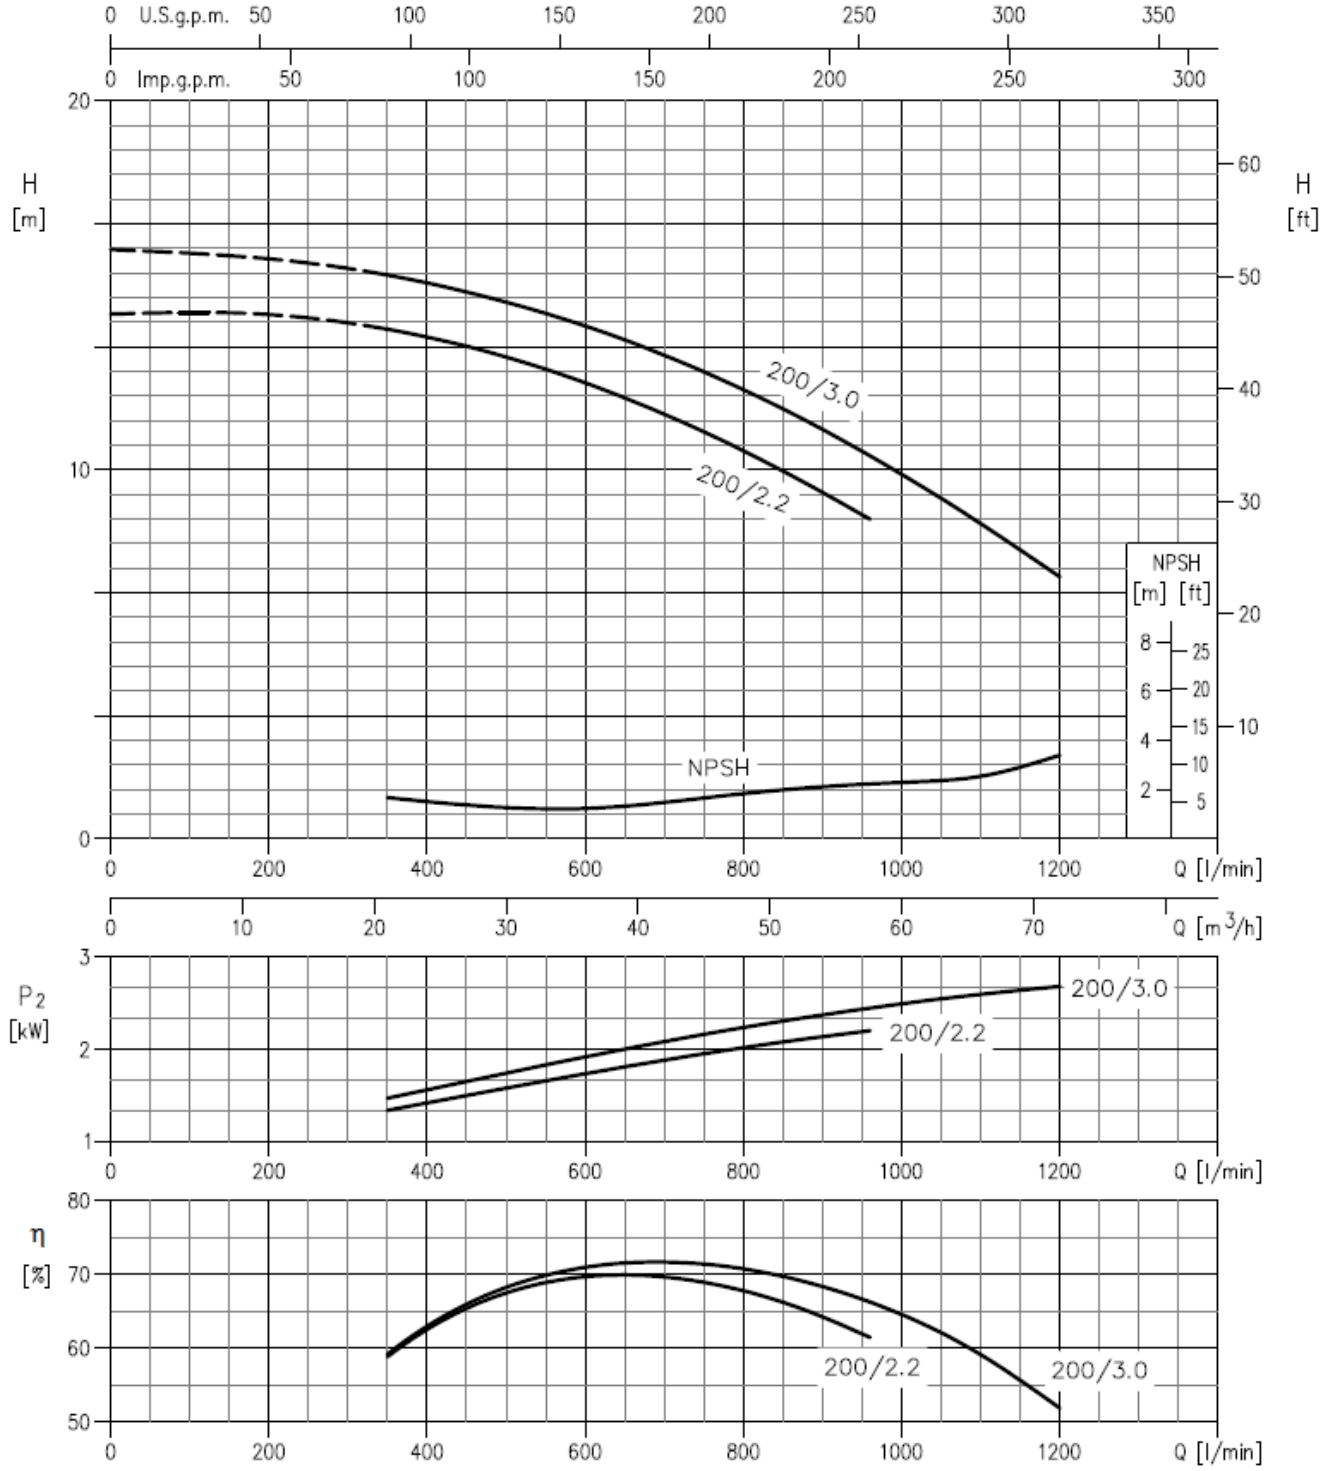

Rotation speed ≈ 1450 min-1

Test standard : ISO 9906 Annex A

PERFORMANCE CURVE


50Hz

Rev.0

3E(S) 100-160 **4 POLE**

100-160/1.5 (1.5 kW) - impeller diameter = 156 mm


100-160/2.2 (2.2 kW) - impeller diameter = 174 mm

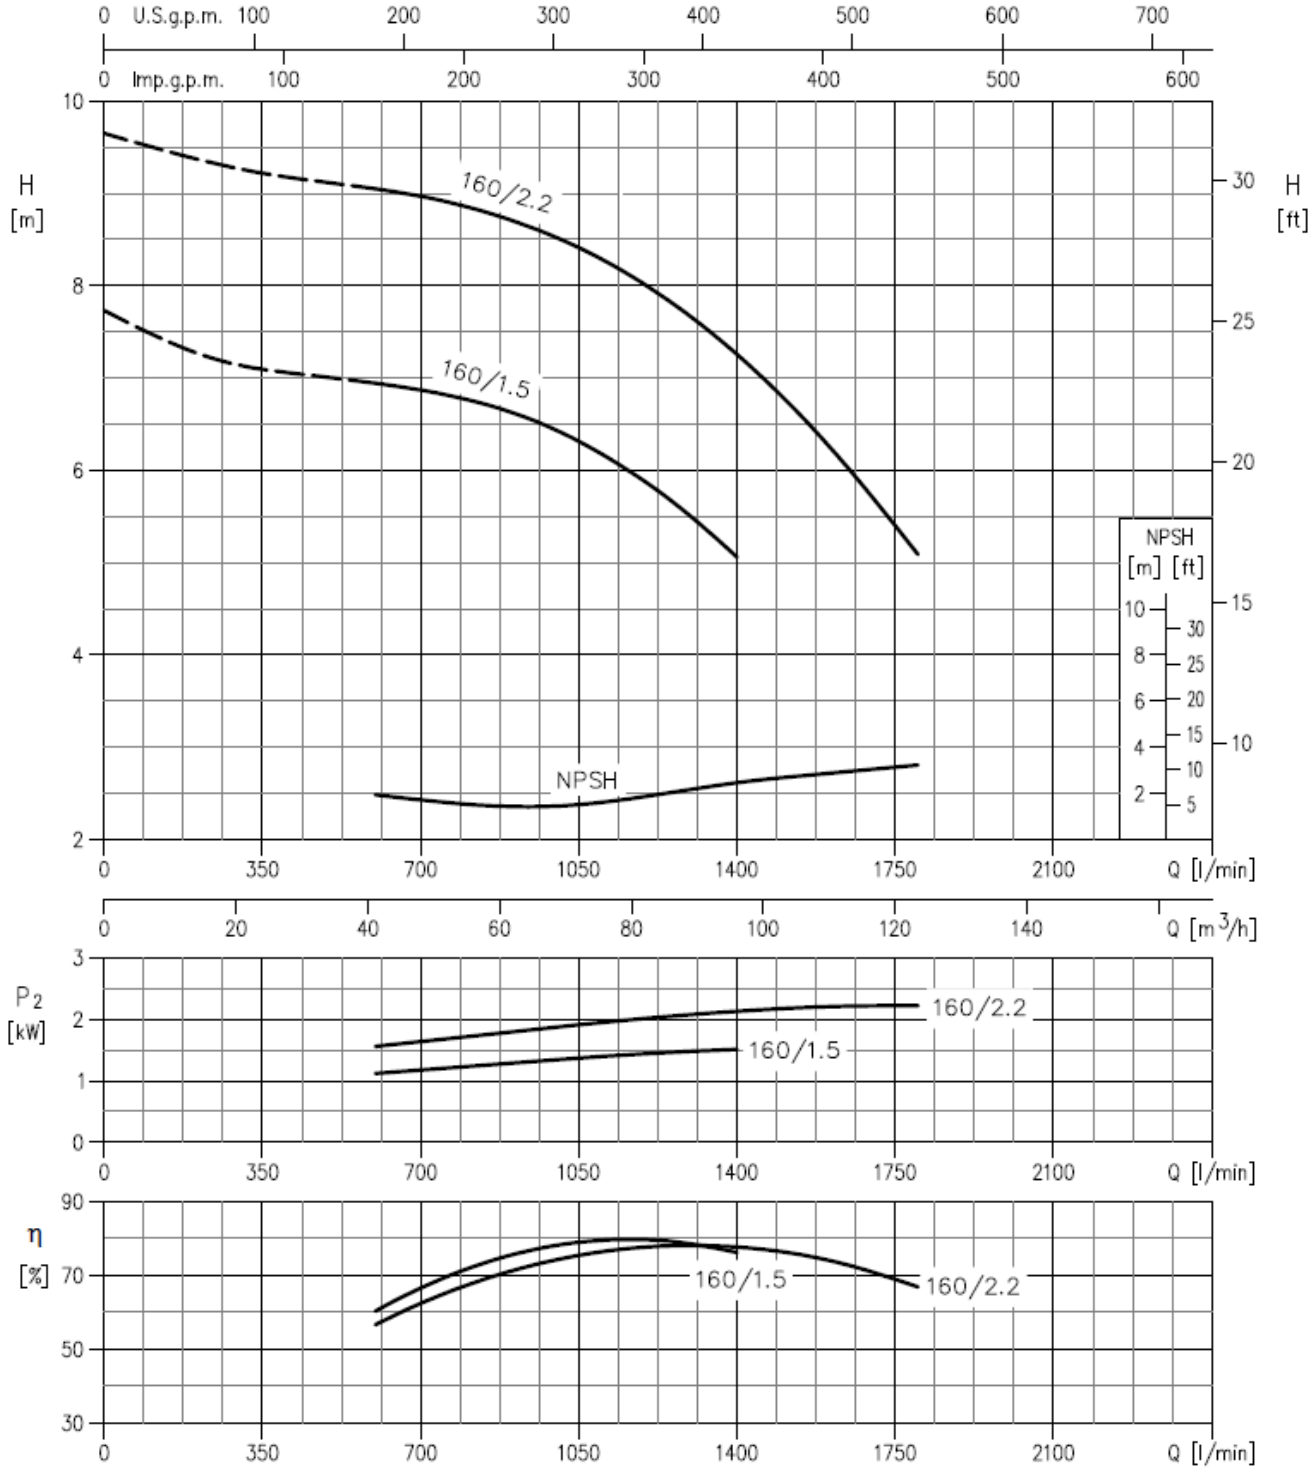


Rotation speed ≈ 1450 min-1

Test standard : ISO 9906 Annex A

SECTIONAL VIEW DRAWING 3E 32-125,40-160,50-100/125/160,65-100,80-100

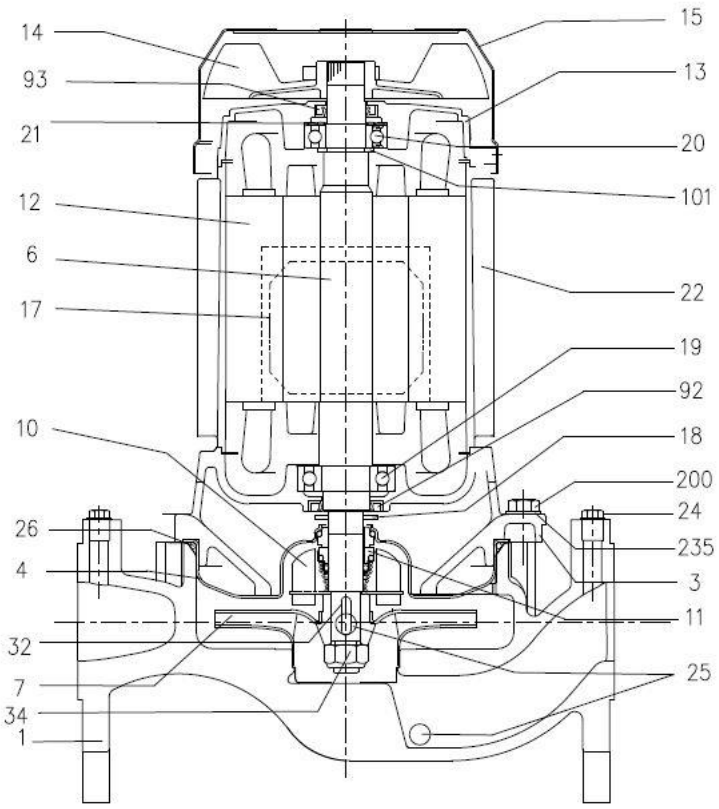



SECTIONAL VIEW TABLE 3E 32-125,40-160,50-100/125/160,65-100,80-100

No	PART NAME		MATERIAL	DIMENSIONS	STANDARD	Q.TY
1	Casing		Cast iron EN-GJL-250-EN 1561			1
3	Motor bracket [1]		-			1
4	Casing cover		EN 1.4301 (AISI 304)			1
6	Shaft with rotor - Wet extension		EN 1.4301 (AISI 304)			1
7	Impeller		EN 1.4301 (AISI 304)			1
10	Baffle [2[		EN 1.4301 (AISI 304)			1
11	Mechanical seal [3]					1
12	Motor frame with stator		-			1
13	Motor cover		Aluminium			1
14	Fan		PA			1
15	Fan cover		Fe P04 Galvanized			1
16	Terminal		-			1
17	Terminal box cover		Aluminium (three phase version)			1
18	Splash ring	0.37 kW to 0.75 kW		25x14.5x2.5	EBARA DRAWING	1
		Up to11kW		40x21.5x2		
		15 kW and above		50x29.5x3		
19	Bearing [5]		•			1
20	Bearing [5]		•			1
21	Adjusting ring		Steel C70			1
22	Tie rod	Up to 3 kW	Fe 42 Galvanized	M5	EBARA DRAWING	4
		For 4 to 7.5 kW		M6		
		9.2 kW to 11kW		M8		
	Screw	15 kW and above	Gv. Steel 8.8 strength class ISO 898-1	M10x40	UNI 5739	
24	Plug		Brass	G1/4		2
25	Drain plug		Brass	G1/4		4
26	O-ring	32-125,50-100,50-125, 65-100,80-100,40-160/1.1	EPDM [4]	158.11x5.34	OR 6625	1
		40-160, 50-160,		183.52x5.34	OR 6720	
32	Key	32-125,50-100, 65-100/0.55,65-100/0.75	EN 1.4401 (AISI 316)	A 4x4x14	UNI 6604	1
		40-160,50-125,50-160, 65-100/1.1,65-100/1.5,80-100		A 6x6x18		
34	Impeller nut	32-125,50-100, 65-100/0.55,65-100/0.75	EN 1.4301 (AISI 304)	M10x1.25	UNI 7474	1
		40-160,50-125,50-160, 65-100/1.1,65-100/1.5,80-100		M16x1.5		
56	Box qasket		NBR			1
58	Cable gland		-			1
92	Lip seal	32-125,50-100,65-100		15x30x5	DIN 3760 without spring	1
		Up to 3kW		25x40x7		
		From 4 to 7.5 kW		30x47X7		
93	Lip seal	32-125,50-100, 65-100/0.55, 65-100/0.75		15x30x5	DIN 3760 without spring	1
		40-160,50-125,80-100		17x32x6		
		Up to 4 kW		25x40x7		
200	Screw	32-125,50-100, 65-100/0.55, 65-100/0.75	Gv. Steel 8.8 strength class ISO 898-1	M6x25	UNI 5739	8
		65-100/1.1,65-100/1.5		M 6x30		
		50-125,80-100		M 8x30		
		40-160,50-160		M10x35		10
235	Washer	32-125,50-100,65-100	Galvanized Steel	8.4x17	UNI 6592	8
		50-125,80-100				
		40-160,50-160		10.5x21		10

[1] Cast iron EN-GJL-200-EN 1561 for models with 15,18.5, 22 kW motor
Aluminum AL-EN-1706-AC-46000-D for all the others;


[2] EN1.4301(AISI 304) for 32-125,40-160,50-100/125/160
CF8 for 65-100,80-100


[3] See MECHANICAL SEAL pages from 337 to 339

[4] FPM for Q1AVGG,Q4Q1VGG
EPDM for Q1AEGG,Q4Q1EGG

[5] See BEARING Pages from 333 to 336

SECTIONAL VIEW DRAWING 3E 40-200

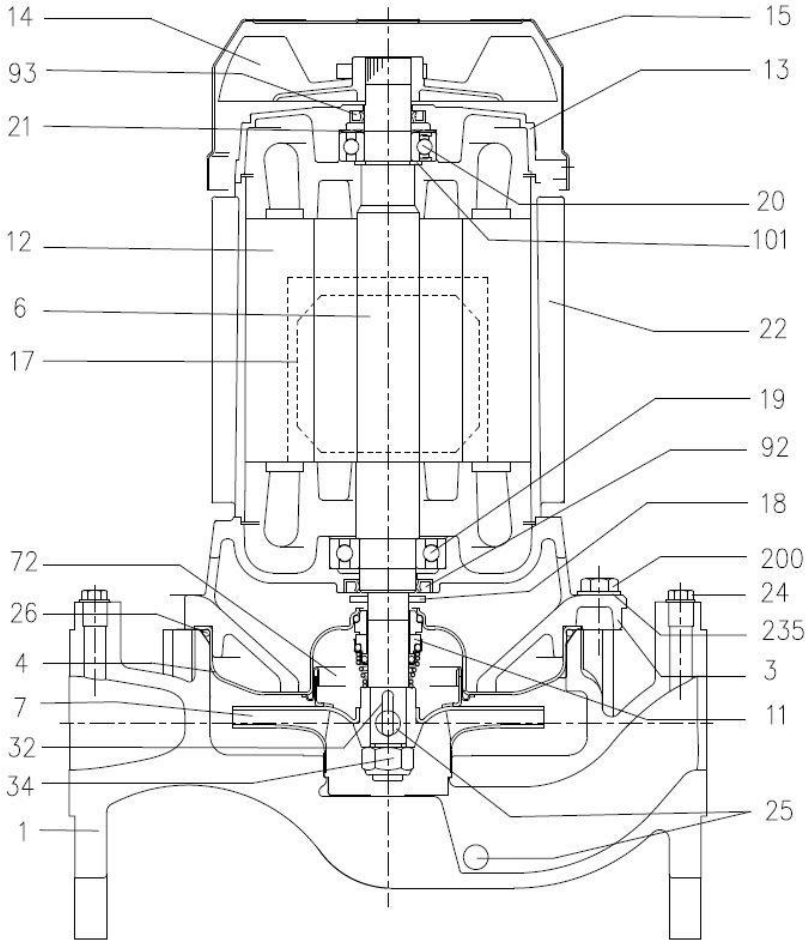



SECTIONAL VIEW TABLE 3E 40-200

No	PART NAME		MATERIAL	DIMENSIONS	STANDARD	Q.TY
1	Casing		Cast iron EN-GJL-250-EN 1561			1
3	Motor Bracket [1]		-			1
4	Casing cover		EN 1.4301 (AISI 304)			1
6	Shaft with rotor - Wet extension		EN 1.4301 (AISI 304)			1
7	Impeller		EN 1.4301 (AISI 304)			1
11	Mechanical seal [2]		-			1
12	Motor frame with stator		-			1
13	Motor cover		Aluminium			1
14	Fan		PA			1
15	Fan cover		Fe P04 Galvanized			1
16	Terminal		-			1
17	Terminal box cover		Aluminium (three phase version)			1
18	Splash ring			40x21.5x2	EBARA DRAWING	1
19	Bearing [4]		•			1
20	Bearing [4]		•			1
21	Adjusting ring		Steel C70			1
22	Tie rod	Up to 3 kW	Fe 42 Galvanized	M5	EBARA DRAWING	4
		For 4 - 5.5 - 7.5 kW		M6		
24	Plug		Brass	G1/4		2
25	Drain plug		Brass	G1/4		4
26	O-ring		EPDM [3]	227.96x5.34	OR 6895	1
32	Key		EN 1.4401 (AISI 316)	A 6x6x25	UNI 6604	1
34	Impeller nut		EN 1.4301 (AISI 304)	M16x1.5	UNI 7474	1
56	Box qasket		NBR			1
58	Cable gland		-			1
72	Casing ring		EN 1.4301 (AISI 304)			1
92	Lip seal	Up to 3kW		25x40x7	DIN 3760 without spring	1
		From 4 to 7.5 kW _		30x47X7		
93	Lip seal	Up to 4 kW		25x40x7	DIN 3760 without spring	1
		From 5.5 kW to 7.5 kW		30x47X7		
200	Screw		Gv. Steel 8.8 strength class ISO 898-1	M10x35		12
235	Washer		Galvanized Steel	10.5x21	UNI 6592	12


[1] Cast iron EN-GJL-200-EN 1561 for models with 15,18.5, 22 kW motor
Aluminum AL-EN-1706-AC-46000-D for all the others;

[2] See MECHANICAL SEAL pages from 337 to 339

[3] FPM for Q1AVGG,Q4Q1VGG
EPDM for Q1AEGG,Q4Q1EGG

[4] See BEARINGS pages from 333 to 336

SECTIONAL VIEW DRAWING 3E 50-200,65-200,80-160/200,100-160

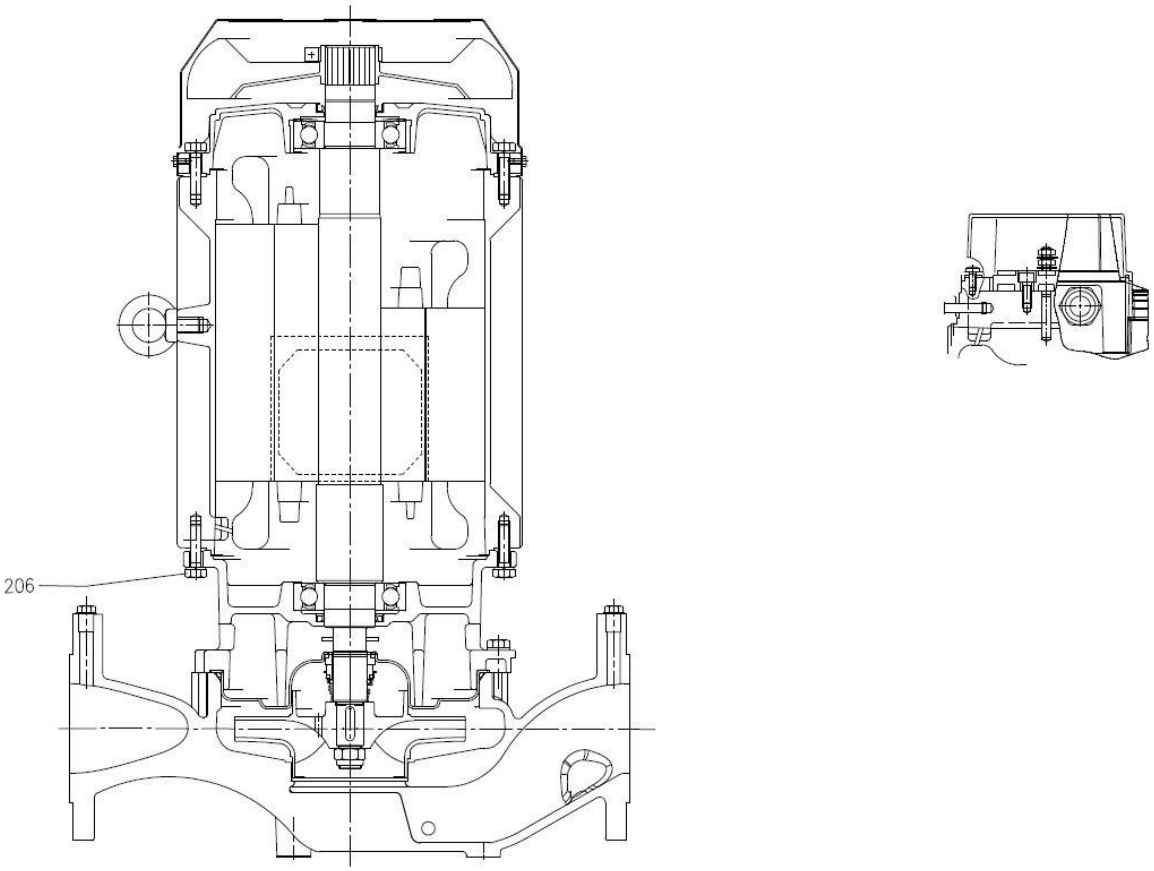



SECTIONAL VIEW TABLE 3E 50-200,65-200,80-160/200,100-160

No	PART NAME		MATERIAL	DIMENSIONS	STANDARD	Q.TY
1	Casing		Cast iron EN-GJL-250-EN 1561			1
3	Motor bracket [1]		-			1
4	Casing cover		EN 1.4301 (AISI 304)			1
6	Shaft with rotor - Wet extension		EN 1.4301 (AISI 304) [9]			1
7	Impeller [2]		EN 1.4301 (AISI 304)			1
11	Mechanical seal [3]					1
12	Motor frame with stator		-			1
13	Motor cover		Aluminium			1
14	Fan		PA			1
15	Fan cover		Fe P04 Galvanized			1
16	Terminal		-			1
17	Terminal box cover		Aluminium (three phase version)			1
18	Splash ring	0.37 kW to 0.75 kW		25x14.5x2.5	EBARA DRAWING	1
		Up to11kW		40x21.5x2		
		15 kW and above		50x29.5x3		
19	Bearing [8]		•			1
20	Bearing [8]		•			1
21	Adjusting ring		Steel C70			1
22	Tie rod	For 4 - 5.5 - 7.5 kW	Fe 42 Galvanized	M6	EBARA DRAWING	4
		For 9.2 to 11kW		M8		
	Screw	15kW and above	Gv. Steel 8.8 strength class ISO 898-1	M10x40	UNI 5739	
24	Plug		Brass	G1/4		2
25	Drain plug	50-200	Brass	G1/4		4
		65-200,80-160,80-200, 100-160				2
26	O-ring		EPDM [4]	227.96x5.34	OR 6895	1
32	Key	50-200,65-200, 80-160/9.2,80-160/11	EN 1.4401 (AISI 316)	A 6x6x25	UNI 6604	1
		80-160/15,80-200,100-160		A 8x7x30		
34	Impeller nut	50-200,65-200, 80-160/9.2,80-160/11	EN 1.4301 (AISI 304)	M16x1.5	UNI 7474	1
		65-200/11		M18x1.5		
		80-160/15,80-200,100-160		M20x1.5		
56	Box qasket		NBR			1
58	Cable gland		-			[5]
72	Casing ring		EN 1.4301 (AISI 304)			1
92	Lip seal	From 5.5 kW to 7.5 kW		30x47X7	DIN 3760 without spring	1
		From 9.2 to 11		40x55x7		
		From 15kW to 22kW		45x60x7		
93	Lip seal	From 5.5 kW to 7.5 kW		30x47X7	DIN 3760 without spring	1
		From 9.2 to 11		40x55x7		
		From 15kW to 22kW		45x60x7		
101	Snap Ring [6]		Carbon tool steels TC 80	Ø40	UNI 7435	1
200	Screw	50-200,65-200,80-160,80-200	Gv. Steel 8.8 strength class ISO 898-1	M10x35		12
		100-160				10
235	Washer		Galvanized Steel	10.5x21x2	UNI 6592	12
206	Screw for Bracket (15kW and above) [7]		Gv. Steel 8.8 strength class ISO 898-1	M10x40	UNI 5739	4

[1] Cast iron EN-GJL-200-EN 1561 for 3D 32-200/3 and models with 15,18.5, 22 kW motor
Aluminum AL-EN-1706-AC-46000-D for all the others;
[2] EN 1.4301 (AISI 304) for 50,65
EN 1.4401(AISI 316) for 80,100series(except 80-100)
[3] See MECHANICAL SEAL pages from 337 to 339
[4] FPM for Q1AVGG,Q4Q1VGG
EPDM for Q1AEGG,Q4Q1EGG
[5] 1 for pumps with motor up to 11 kW
2 for pumps with 15 kW motor and above
[6] Only for pumps with 9.2 and 11 kW motor
[7] Only for pumps with 15 kW motor and above
[8] See 3D BEARINGS pages from 333 to 336
[9] EN1.4404(AISI316L) for 100-160

SECTIONAL VIEW DRAWING 3ES32-125,40-160,50-100/125/160,65-100,80-100

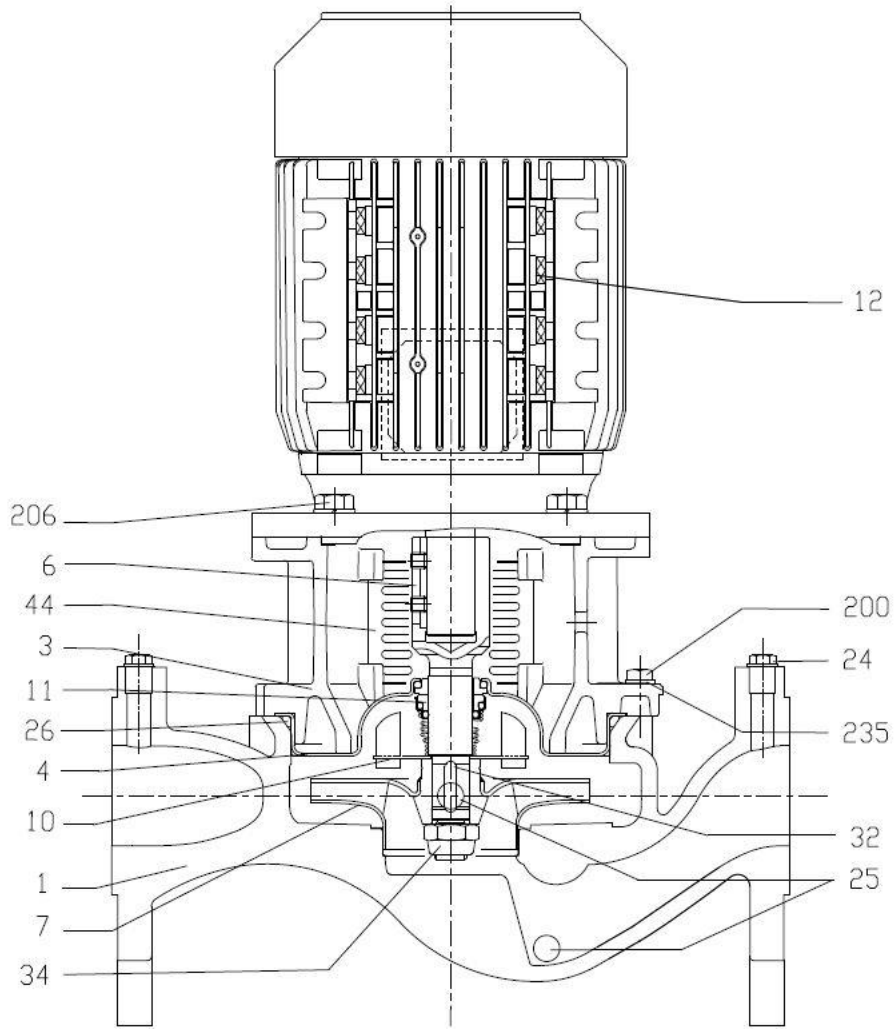



CONSTRUCTION

50Hz

Rev.0

SECTIONAL VIEW TABLE 3ES32-125,40-160,50-100/125/160,65-100,80-100

No	PART NAME		MATERIAL	DIMENSIONS	STANDARD	QTY
1	Casing		Cast iron EN-GJL-200-EN 1561			1
3	Motor bracket [1]		Cast iron EN-GJL-200-EN 1561			1
4	Casing cover		EN 1.4301 (AISI 304)			1
6	Coupling - Wet extensions [4]		EN 1.4301 (AISI 304)			1
7	Impeller		EN 1.4301 (AISI 304) [5]			1
10	Baffle		EN 1.4301 (AISI 304)			1
11	Mechanical seal [2]		-			1
12	Motor					1
24	Priming plug		Brass	G1/4		2
25	Draining plug		Brass	G1/4		4
26	O-ring	32-125,50-100,50-125, 65-100,80-100	EPDM [3]	158.11x5.34	OR 6625	1
		40-160,50-160		183.52x5.34	OR 6720	
32	Key		EN 1.4401 (AISI 316)	6x6x18	UNI 6604	1
34	Impeller nut		EN 1.4301 (AISI 304)	M16x1.5	UNI 7474	1
44	Protection		EN 1.4301 (AISI 304)		EBARA DRAWING	1
200	Screw	32-125,50-100, 65-100/0.55,65-100/0.75	Gv. Steel 8.8 strength class ISO 898-1	M6x25	UNI 5739	8
		65-100/1.1,65-100/1.5		M6x30		
		50-125,80-100		M8x30		
		40-160, 50-160,		M 10x35		10
206	Screw for bracket	0.75kW to 2.2kW	Gv. Steel 8.8 strength class ISO 898-1	M10x25	UNI 5739	4
		3kW to 4kW		M12x30		
235	Washer	32-125,50-100,50-125, 65-100,80-100	Galvanized Steel	8.4x17	UNI 6592	8
		40-160,50-160		10.5x21		10

[1] Cast iron EN-GJL-200-EN 1561 for motor of 0.75kW
Aluminum AL-EN-1706-AC-46000-D for motor of 1.1 to 4kW


[2] See MECHANICAL SEAL pages from 337 to 339

[3] FPM for Q1AVGG,Q4Q1VGG
EPDM for Q1AEGG,Q4Q1EGG

[4] See 3ES COUPLING page

[5] CF8 impeller for 65-100 and 80-100

SECTIONAL VIEW DRAWING 3ES 40-200

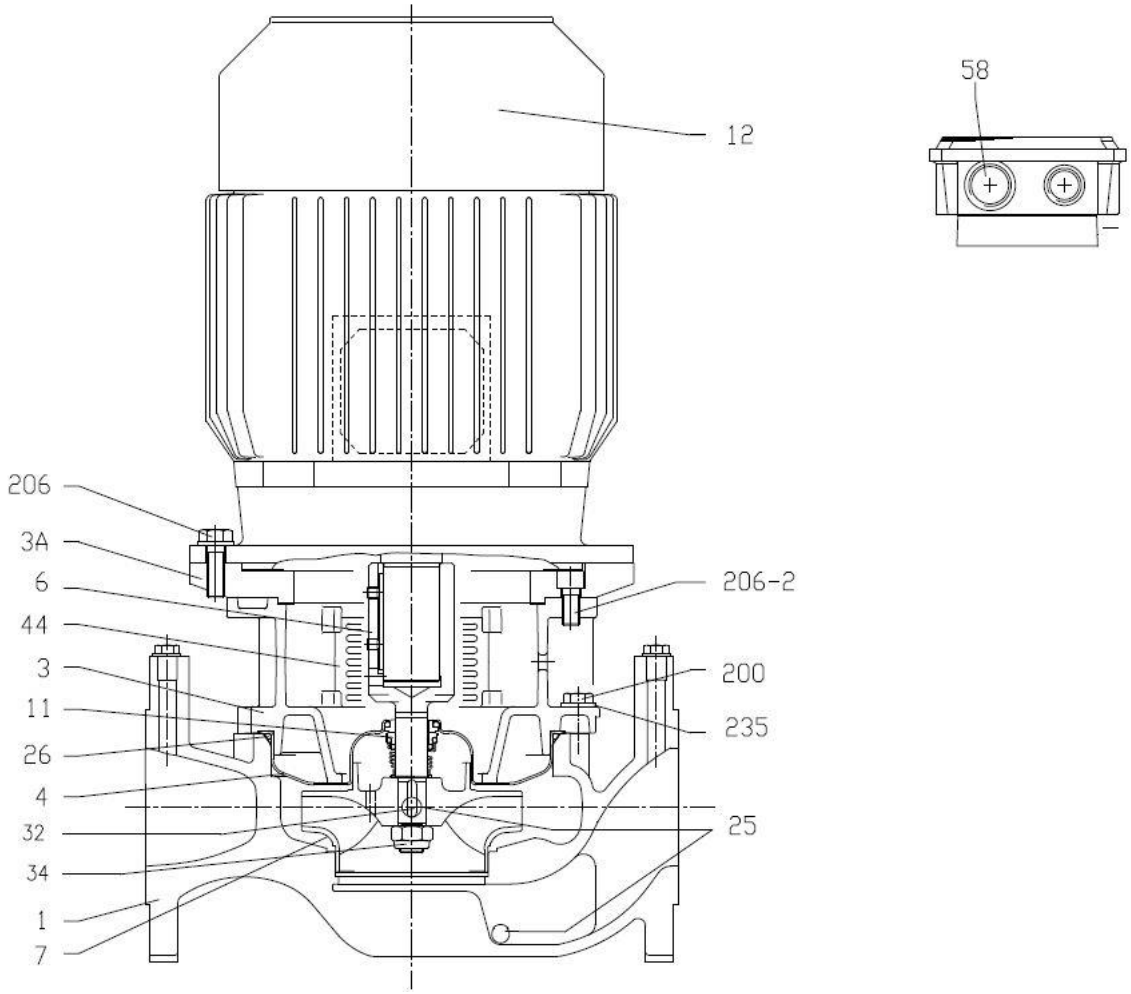

SECTIONAL VIEW TABLE 3ES 40-200

No	PART NAME	MATERIAL	DIMENSIONS	STANDARD	QTY
1	Casing	Cast iron EN-GJL-200-EN 1561			1
3	Motor bracket	Cast iron EN-GJL-200-EN 1561			1
4	Casing cover	EN 1.4301 (AISI 304)			1
6	Coupling - Wet extensions [4]	EN 1.4301 (AISI 304)			1
7	Impeller [1]	-			1
11	Mechanical seal [2]	-			1
12	Motor				1
24	Priming plug	Brass	G1/4		2
25	Draining plug	Brass	G1/4		4
26	O-ring	EPDM [3]	227.96x5.34	OR 6895	1
32	Key	EN 1.4401 (AISI 316)	6x6x25	UNI 6604	1
34	Impeller nut	EN 1.4301 (AISI 304)	M16x1.5	UNI 7474	1
44	Protection	EN 1.4301 (AISI 304)		EBARA DRAWING	1
72	Casing ring	EN 1.4301 (AISI 304)			1
200	Screw	Gv. Steel 8.8 strength class ISO 898-1	M 10x35		12
206	Screw for bracket	Gv. Steel 8.8 strength class ISO 898-1	M10x40	UNI 5739	4
235	Washer	Galvanized Steel	10.5x21	UNI 6592	12


[1] EN 1.4301 (AISI 304) for 40,65 series;
EN 1.4401(AISI 316) for 80 series


[2] See MECHANICAL SEAL pages from 337 to 339

[3] FPM for Q1AVGG,Q4Q1VGG
EPDM for Q1AEGG,Q4Q1EGG

[4] See 3DS COUPLING page

SECTIONAL VIEW DRAWING 3ES 50-200,65-200,80-160/200,100-160

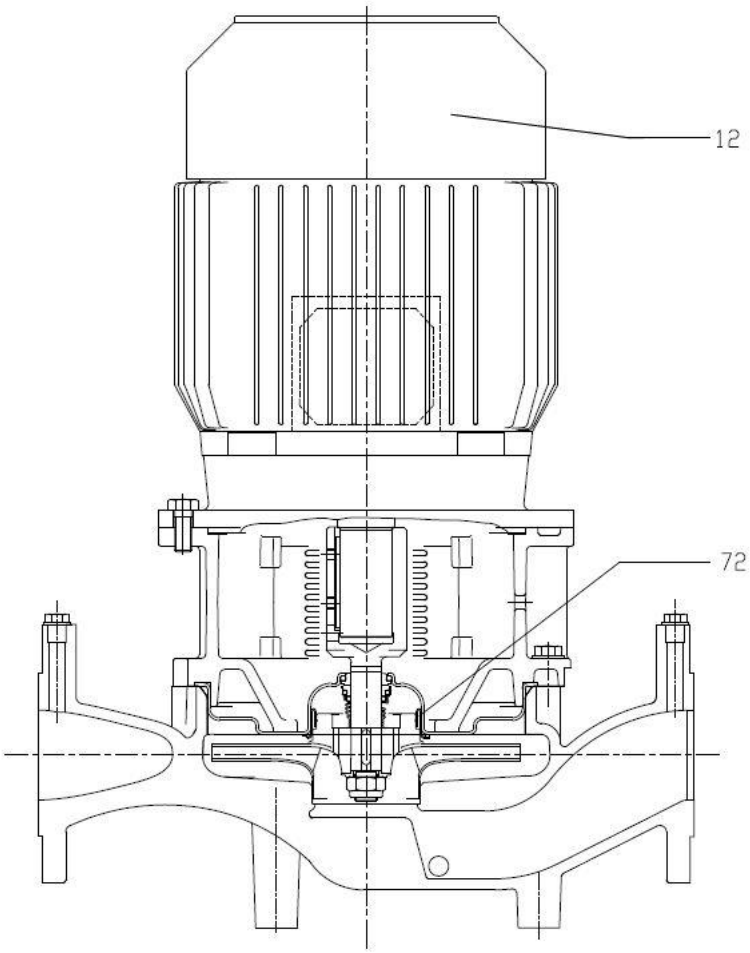



SECTIONAL VIEW TABLE 3ES 50-200,65-200,80-160/200,100-160

No	PART NAME		MATERIAL	DIMENSIONS	STANDARD	Q.TY
1	Casing		Cast iron EN-GJL200-EN 1561			1
3	Motor bracket		Cast iron EN-GJL-200-EN 1561			1
4	Casing cover		EN 1.4301 (AISI 304)			1
6	Coupling - Wet extensions [6]		EN 1.4301 (AISI 304) [7]			1
7	Impeller [1]		-			1
11	Mechanical seal [2]		-			1
12	Motor					1
24	Priming plug		Brass	G1/4		2
25	Drain plug	50-200	Brass	G1/4		4
		Other models				2
26	O-ring		EPDM [3]	227.96x5.34	OR 6895	1
32	Key	50-200,65-200,80-160/9.2, 80-160/11	EN 1.4401 (AISI 316)	6x6x25	UNI 6604	1
		80-160/15,80-200,100-160		8x7x30		
34	Impeller nut	Up to11kW [4]	EN 1.4301 (AISI 304)	M16x1.5	UNI 7474	1
		65-200/15		M18x1.5		
		15 kW and above		M20X1.5		
44	Protection		EN 1.4301 (AISI 304)		EBARA	1
72	Casing ring [5]		EN 1.4301 (AISI 304)			1
200	Screw	50-200,65-200,80-160, 80-200	Gv. Steel 8.8 strength class ISO 898-1	M10x35	UNI 5739	12
		100-160				10
206	Screw for bracket	From 5.5kW to 9.2kW	Gv. Steel 8.8 strength class ISO 898-1	M12x30	UNI 5739	4
		From 11kW to 18.5kW		M16x35		
		From 22kW to 37kW		M16x45		
235	Washer		Galvanized Steel	10.5x21	UNI 6592	12

[1] EN 1.4301 (AISI 304) for 50,65 series;
EN 1.4401(AISI 316) for 80,100 series

[2] See MECHANICAL SEAL pages from 337 to 339

[3] FPM for Q1AVGG,Q4Q1VGG
EPDM for Q1AEGG,Q4Q1EGG


[4] Except for 100-160/11kW :M20x1.5


[5] Only for: 65-200

[6] See 3DS COUPLING page

[7] EN 1.4404 (AISI 316L) for 100 series

SECTIONAL VIEW DRAWING 3E4 50-125

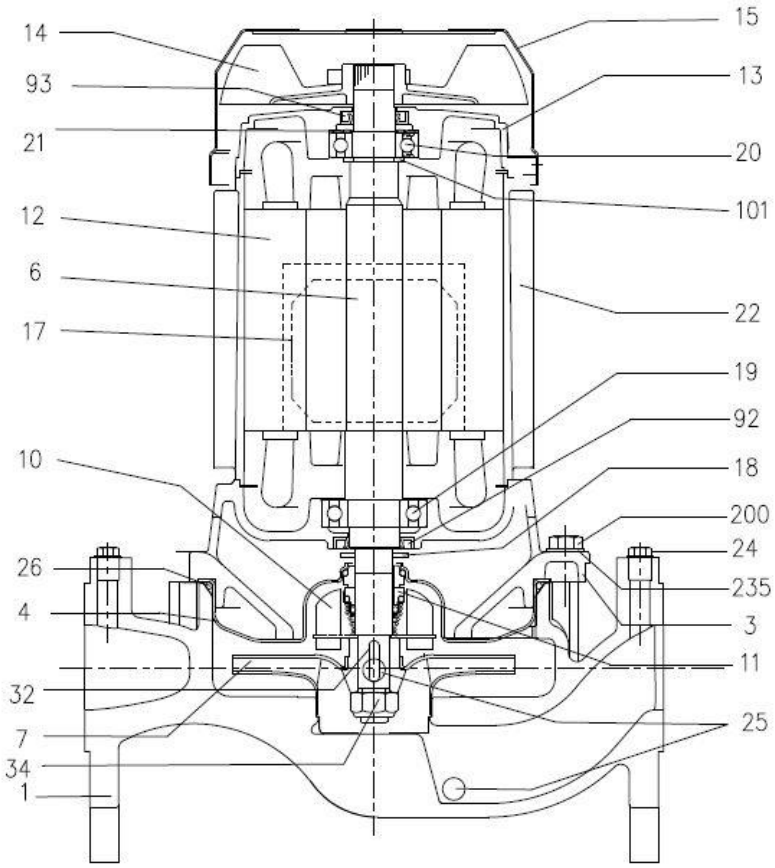



SECTIONAL VIEW TABLE 3E4 50-125

No	PART NAME		MATERIAL	DIMENSIONS	STANDARD	QTY
1	Casing		Cast iron EN-GJL-250-			1
3	Motor bracket		[3]			1
4	Casing cover		EN 1.4301 (AISI 304)			1
6	Shaft with rotor-Part in contact with		EN 1.4301 (AISI 304)			1
7	Impeller		EN 1.4301 (AISI 304)			1
10	Baffle		EN 1.4301 (AISI 304)			1
11	Mechanical seal [1]		SiC/met.Carbon/EPDM			1
12	Motor frame with stator		-			1
13	Motor cover		Aluminium			1
14	Fan		PA			1
15	Fan cover		Fe P04 Galvanized			1
16	Terminal					1
17	Terminal box cover		Aluminium (three phase version)			1
18	Splash ring		NBR	40x21.5x2	EBARA DRAWING	1
19	Bearing			See table p.319		1
20	Bearing			See table p.319		1
21	Adjusting ring		Steel C70			1
22	Tie rod		Fe 42 Galvanized	M5	EBARA DRAWING	4
24	Plug		Brass	G1/4	DIN 906	2
25	Drain plug		Brass	G1/4	DIN 906	4
26	“O” ring		EPDM [2]	158.11x5.34	OR 6625	1
32	Key		EN 1.4401 (AISI 316)	6x6x18	UNI 6604	1
34	Impeller nut		EN 1.4301 (AISI 304)	M16x1.5	UNI 7474	1
56	Box gasket		NBR			1
58	Fasting nut					1
92	Lip seal	Upto 1.5kW	-	25x40x7	DIN 3760 without spring	1
		From 2.2kW to 3kW	-	30x47X7		
93	Lip seal	For 0.25kW	-	15x30x5	DIN 3760 without spring	1
		For 0.37kW and 0.55kW	-	17x32X7		
		From 0.75 kW to 3kW		25x40x7		
200	Screw		Gv. Steel 8.8 strength class ISO 898/1	M8x30	UNI 5739	8
235	Washer		Galvanized Steel	8.4x17	UNI 6592	8

[1] Special version : see mechanical seal pages from 337 to 339


[2] FPM for Q1AVGG,Q4Q1VGG

EPDM for Q1AEGG, Q4Q1EGG

[3] Cast iron EN-GJL-200-EN 1561 for models with 15,18.5, 22 kW motor

Aluminium AL-EN-1706-AC-46000-D for all others

SECTIONAL VIEW DRAWING 3E4 100-160

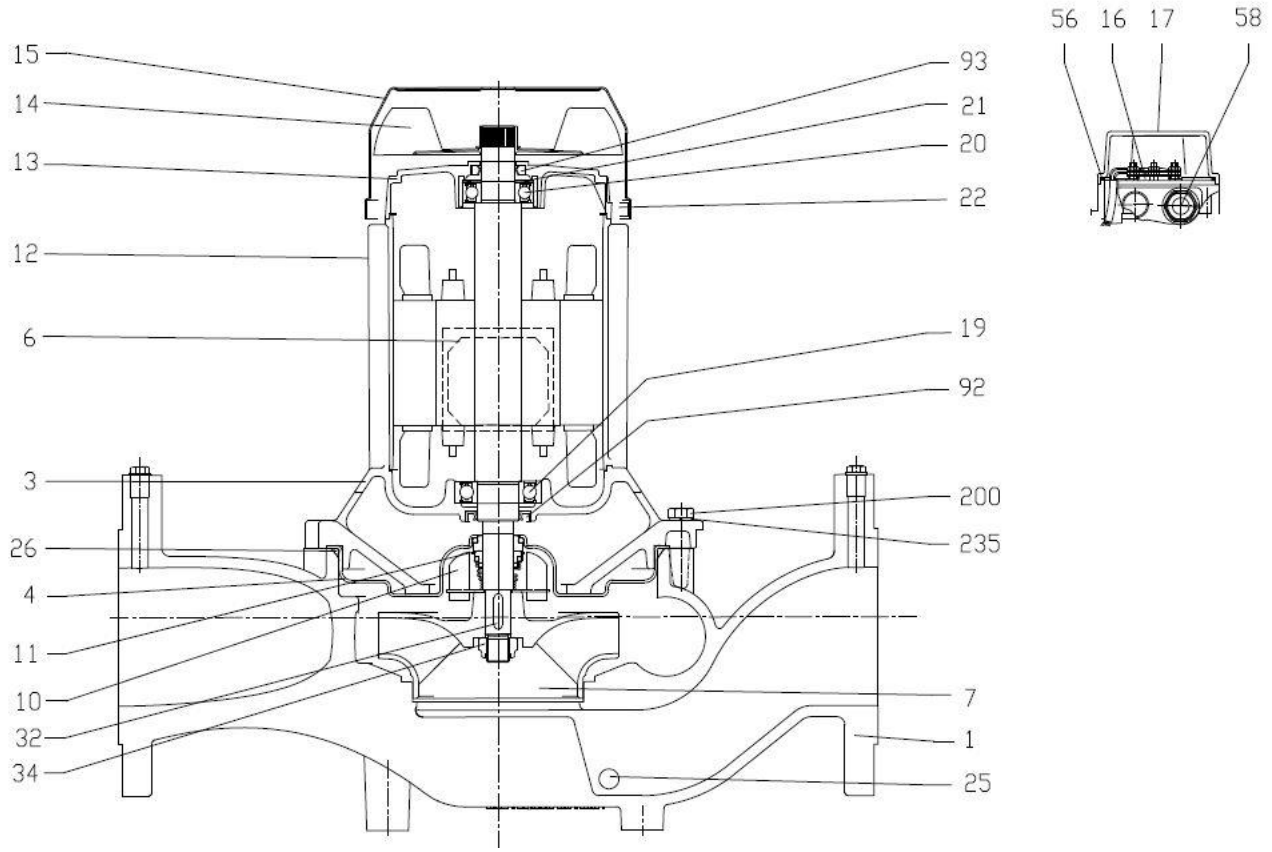


SECTIONAL VIEW TABLE 3E4 100-160


No	PART NAME		MATERIAL	DIMENSIONS	STANDARD	QTY
1	Casing		Cast iron EN-GJL-250-EN 1561			1
3	Motor bracket		Cast iron EN-GJL-200-EN 1561			1
4	Casing cover		EN 1.4404 (AISI316L)			1
6	Shaft with rotor		EN 1.4404 (AISI 316L) -Part in contact with liquid			1
7	Impeller		EN 1.4401 (AISI 316)			1
10	Baffle		EN 1.4301 (AISI 304)			1
11	Mechanical seal [1]		SiC/met.Carbon/EPDM			1
12	Motor frame with stator		-			1
13	Motor cover		Aluminium			1
14	Fan		PA			1
15	Fan cover		Fe P04 Galvanized			1
16	Terminal		-			1
17	Terminal box cover		Aluminium			1
19	Bearing		-			1
20	Bearing		-			1
21	Adjusting ring		Steel C70			1
22	Tie rod		Fe 42 Galvanized			4
24	Plug		Brass	G1/4	EPE DRAWING	2
25	Drain Plug		Brass	G1/4	EPE DRAWING	2
26	“O” ring		EPDM[2]	227.96x5.34	OR 6895	1
32	Key		EN 1.4404 (AISI 316L)	6x6x18	UNI 6604	1
34	Impeller nut		EN 1.4404 (AISI 316L)	M16X1.5	UNI 7474	1
56	Box gasket		NBR			1
58	Fasting nut		-			1
92	Lip seal	1.5 kW	-	25x40x7	DIN 3760 without spring	1
		2.2 kW		30x47x7		
93	Lip seal		-	25x40x7		1
200	Screw		Gv. Steel 8.8 strength class ISO 898/1	M10x35	UNI 5739	12
235	Washer		Galvanized Steel	10.5x21	UNI 6592	12

[1] Special version: see mechanical seal pages from 337 to 339

[2] FPM for Q1AVGG,Q4Q1VGG
EPDM for Q1AEGG, Q4Q1EGG

SECTIONAL VIEW DRAWING 3E4 40-200, 65-160

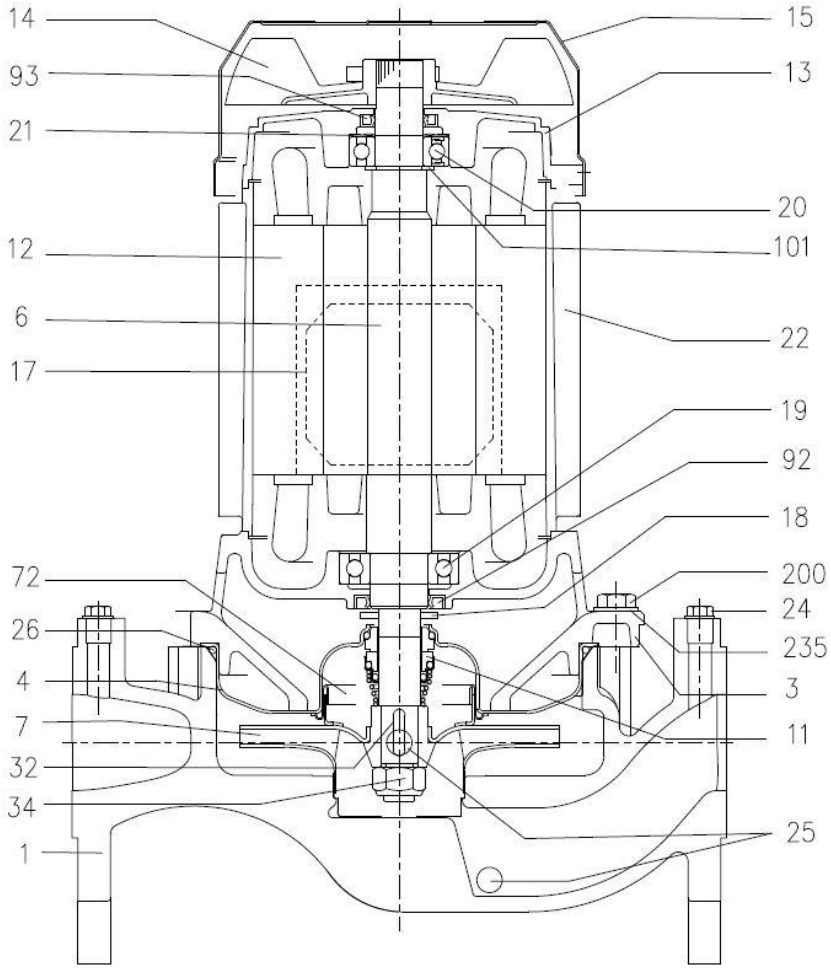



SECTIONAL VIEW TABLE 3E4 40-200, 65-160

No	PART NAME		MATERIAL	DIMENSIONS	STANDARD	QTY
1	Casing		Cast iron EN-GJL-250-EN 1561			1
3	Motor bracket		[4]			1
4	Casing cover		EN 1.4301 (AISI 304)			1
6	Shaft with rotor-Part in contact with		EN 1.4301 (AISI 304)			1
7	Impeller		EN 1.4301 (AISI 304)			1
11	Mechanical seal [2]		SiC/met.Carbon/EPDM			1
12	Motor frame with stator		-			1
13	Motor cover		Aluminium			1
14	Fan		PA			1
15	Fan cover		Fe P04 Galvanized			1
16	Terminal					1
17	Terminal box cover		Aluminium (three phase version)			1
18	Splash ring		NBR	40x21.5x2	EBARA DRAWIN	1
19	Bearing			See table		1
20	Bearing			See table		1
21	Adjusting ring		Steel C70			1
22	Tie rod		Fe 42 Galvanized	M5	EBARA	4
24	Plug		Brass	G1/4	DIN 906	2
25	Drain plug		Brass	G1/4	DIN 906	4
26	O ring		EPDM [3]	227.96x5.34	OR 6895	1
32	Key		EN 1.4401 (AISI 316)	6x6x25	UNI 6604	1
34	Impeller nut		EN 1.4301 (AISI 304)	M16x1.5	UNI 7474	1
56	Box gasket		NBR			1
58	Fasting nut					1
72	Casing ring (not for 80 version) [1]		EN 1.4301 (AISI 304)			1
92	Lip seal	Upto 1.5kW	-	25x40x7	DIN 3760 without spring	1
		From 2.2kW to 3kW		30x47X7		
93	Lip seal	For 0.25kW	-	15x30x5	DIN 3760 without spring	1
		For 0.37kW and 0.55kW	-	17x32X7		
		From 0.75 kW to 3kW		25x40x7		
200	Screw		Gv. Steel 8.8 strength class ISO 898/1	M10x35	UNI 5739	12
235	Washer		Galvanized Steel	8.4x17	UNI 6592	12


[1] For Version 32-200,40-200,50-200,65-160,65-200


[2] Special version: see mechanical seal pages from 337 to 339

[3] FPM for Q1AVGG,Q4Q1VGG
EPDM for Q1AEGG, Q4Q1EGG

[4] Cast iron EN-GJL-200-EN 1561 for models with 15,18.5, 22 kW motor
Aluminum AL-EN-1706-AC-46000-D for all the others

SECTIONAL VIEW DRAWING 3E4 50-200, 80-200

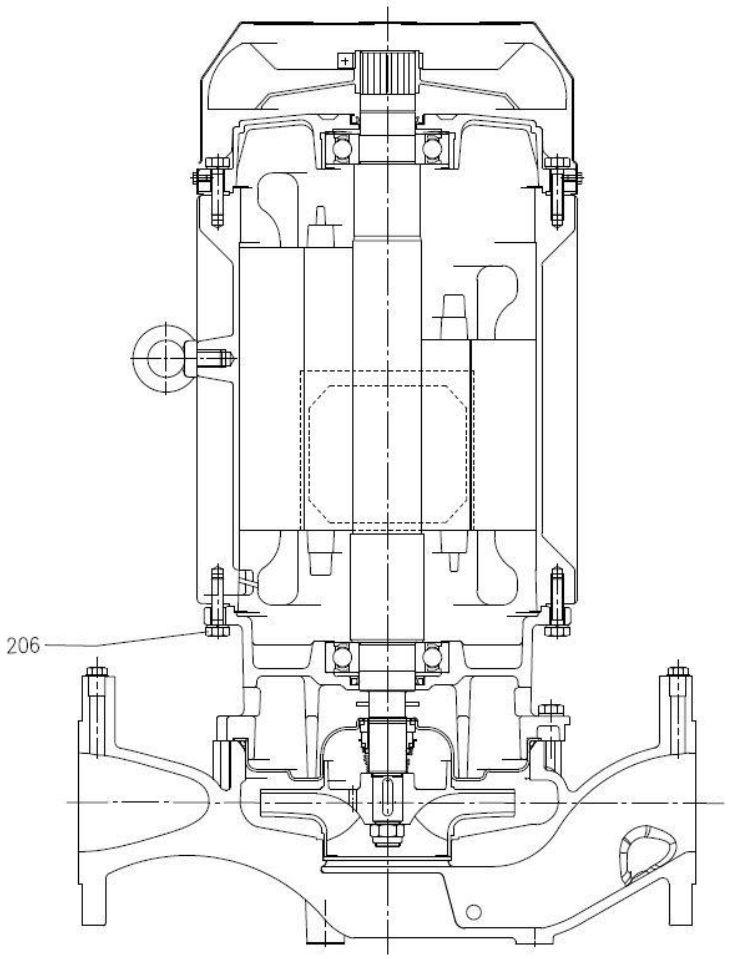



SECTIONAL VIEW TABLE 3E4 50-200, 80-200

No	PART NAME		MATERIAL	DIMENSIONS	STANDARD	QTY
1	Casing		Cast iron EN-GJL-250-EN 1561			1
3	Motor bracket		[4]			1
4	Casing cover		EN 1.4301 (AISI 304)			1
6	Shaft with rotor-Part in contact with		EN 1.4301 (AISI 304)			1
7	Impeller		EN 1.4301 (AISI 304)			1
11	Mechanical seal [2]		SiC/met.Carbon/EPDM			1
12	Motor frame with stator		-			1
13	Motor cover		Aluminium			1
14	Fan		PA			1
15	Fan cover		Fe P04 Galvanized			1
16	Terminal					1
17	Terminal box cover		Aluminium (three phase version)			1
18	Splash ring		NBR	40x21.5x2	EBARA DRAWING	1
19	Bearing			See table		1
20	Bearing			See table		1
21	Adjusting ring		Steel C70			1
22	Tie rod		Fe 42 Galvanized	M5	EBARA DRAWING	4
24	Plug		Brass	G 1/4	DIN 906	2
25	Drain plug	50-200	Brass	G 1/4	DIN 906	4
		80-200				2
26	“O” ring		EPDM [3]	227.96x5.34	OR 6895	1
32	Key		EN 1.4401 (AISI 316)	6x6x25	UNI 6604	1
34	Impeller nut		EN 1.4301 (AISI 304)	M16x1.5	UNI 7474	1
56	Box gasket		NBR			1
58	Fasting nut					1
72	Casing ring (not for 80 version) [1]		EN 1.4301 (AISI 304)			1
92	Lip seal	Upto 1.5kW	-	25x40x7	DIN 3760 without spring	1
		From 2.2kW to 3kW		30x47X7		
93	Lip seal	For 0.25kW	-	15x30x5	DIN 3760 without spring	1
		For 0.37kW and 0.55kW	-	17x32X7		
		From 0.75 kW to 3kW		25x40x7		
200	Screw		Gv. Steel 8.8 strength class ISO 898/1	M10x35	UNI 5739	12
235	Washer		Galvanized Steel	10.5x21	UNI 6592	12


[1] For Version 32-200,40-200,50-200,65-160,65-200


[2] Special version : see mechanical seal pages from 337 to 339

[3] FPM for Q1AVGG,Q4Q1VGG
EPDM for Q1AEGG, Q4Q1EGG

[4] Cast iron EN-GJL-200-EN 1561 for models with 15,18.5, 22 kW motor
Aluminum AL-EN-1706-AC-46000-D for all the others

SECTIONAL VIEW DRAWING 3ES4 100-160



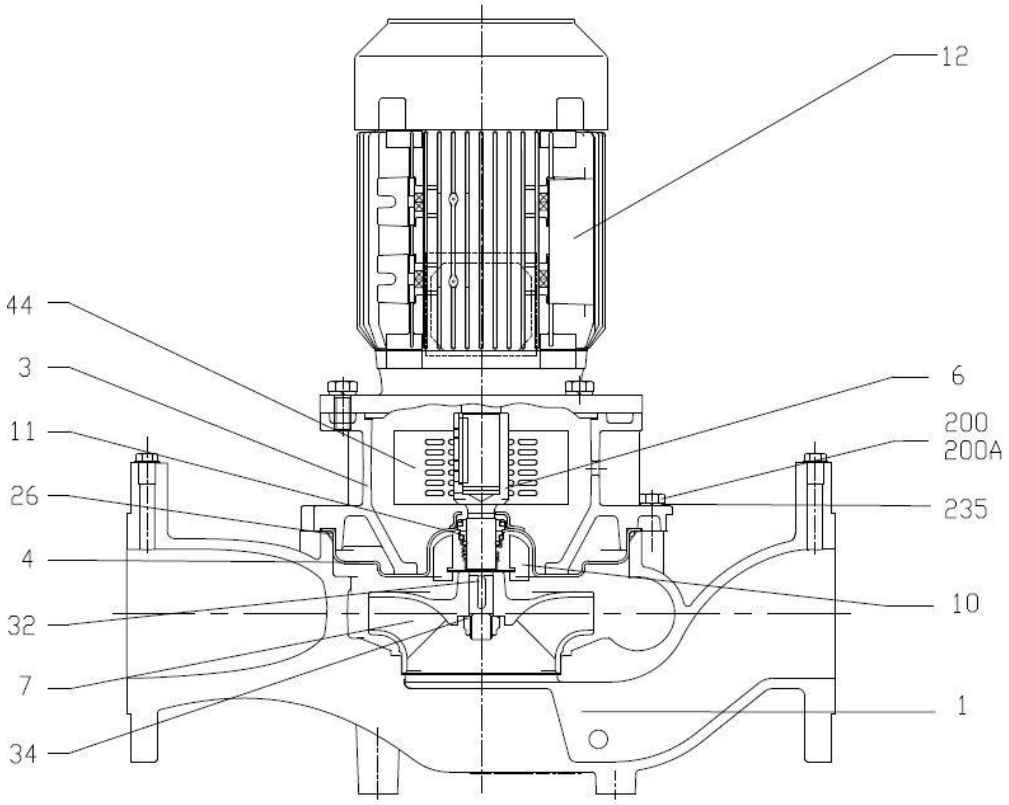

SECTIONAL VIEW TABLE 3ES4 100-160


No	PART NAME	MATERIAL	DIMENSIONS	STANDARD	QTY
1	Casing	Cast iron EN-GJL-250-EN 1561			1
3	Motor bracket	Cast iron EN-GJL-200-EN 1561			1
4	Casing cover	EN 1.4404 (AISI 316L)			1
6	Coupling	EN 1.4404 (AISI 316L)			1
7	Impeller	EN 1.4401 (AISI 316)			1
10	Baffle	EN 1.4301 (AISI 304)			1
11	Mechanical sea [1]	SiC/met.Carbon/EPDM			1
12	Motor	-			1
24	Plug	Brass	G1/4	EPE DRAWING	2
25	Drain Plug	Brass	G1/4	EPE DRAWING	2
26	“O” ring	EPDM (E option) [2]	227.96x5.34	OR 6895	1
32	Key	EN 1.4401 (AISI 316)	6x6x18	UNI 6604	1
34	Impeller nut	EN 1.4404 (AISI 316L)	M16x1.5	UNI 7474	1
44	Protection	EN 1.4301 (AISI 304)		EPE DRAWING	2
200	Screw	Gv. Steel 8.8 strength class ISO 898/1	M10x35	UNI 5739	12
235	Washer	Galvanized Steel	10.5x21	UNI 6592	12

[1] Special version : see mechanical seal pages from 337 to 339

[2] FPM for Q1AVGG,Q4Q1VGG

EPDM for Q1AEGG, Q4Q1EGG

SECTIONAL VIEW DRAWING 3ES4 40-200,65-160

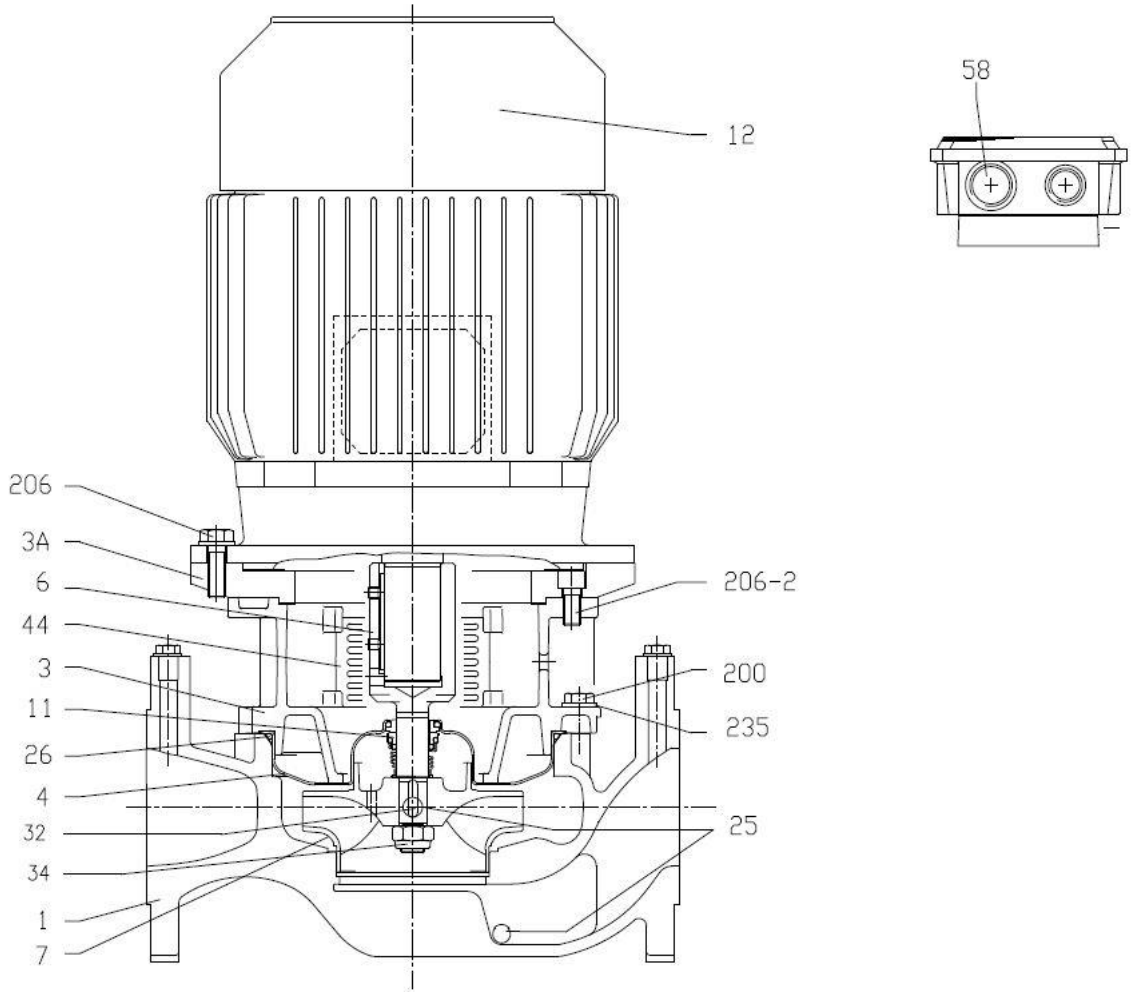

SECTIONAL VIEW TABLE 3ES4 40-200,65-160


No	PART NAME		MATERIAL	DIMENSIONS	STANDARD	QTY
1	Casing		Cast iron EN-GJL-250-EN 1561			1
3	Motor bracket		Cast iron EN-GJL-200-EN 1561			1
4	Casing cover		EN1.4301 (AISI 304)			1
6	Coupling - Part in contact with liquid		EN 1.4301 (AISI 304)			1
7	impeller		EN 1.4301 (AISI 304)			1
11	Mechanical seal [2]		SiC/met.Carbon/EPDM			1
12	Motor					1
24	Plug		Brass	G1/4	DIN 906	2
25	Drain plug		Brass	G1/4	DIN 906	4
26	O-ring		EPDM [3]	227.96x5.34	OR 6895	1
32	Key		EN 1.4401 (AISI 316)	6x6x25	UNI 6604	1
34	impeller nut		EN 1.4301 (AISI 304)	M16x1.5	UNI 7474	1
44	Protection		EN 1.4301 (AISI 304)		EBARA DRAWING	2
72	Casing ring		EN 1.4301 (AISI 304)			1
200	Screw		Gv. Steel 8.8 strength class ISO 898/1	M10x35	UNI 5739	12
206	Screw	from 0.55 to 1.5kW	Gv. Steel 8.8 strength class ISO 898/1	M10x25	UNI 5739	4
		for 2.2 and 3kW		M12x30		
235	Washer		Galvanized Steel	10.5x21	UNI 6592	12


[1] Special version: see mechanical seal pages from 337 to 339

[2] FPM for Q1AVGG,Q4Q1VGG

EPDM for Q1AEGG, Q4Q1EGG

SECTIONAL VIEW DRAWING 3ES4 50-200, 80-200

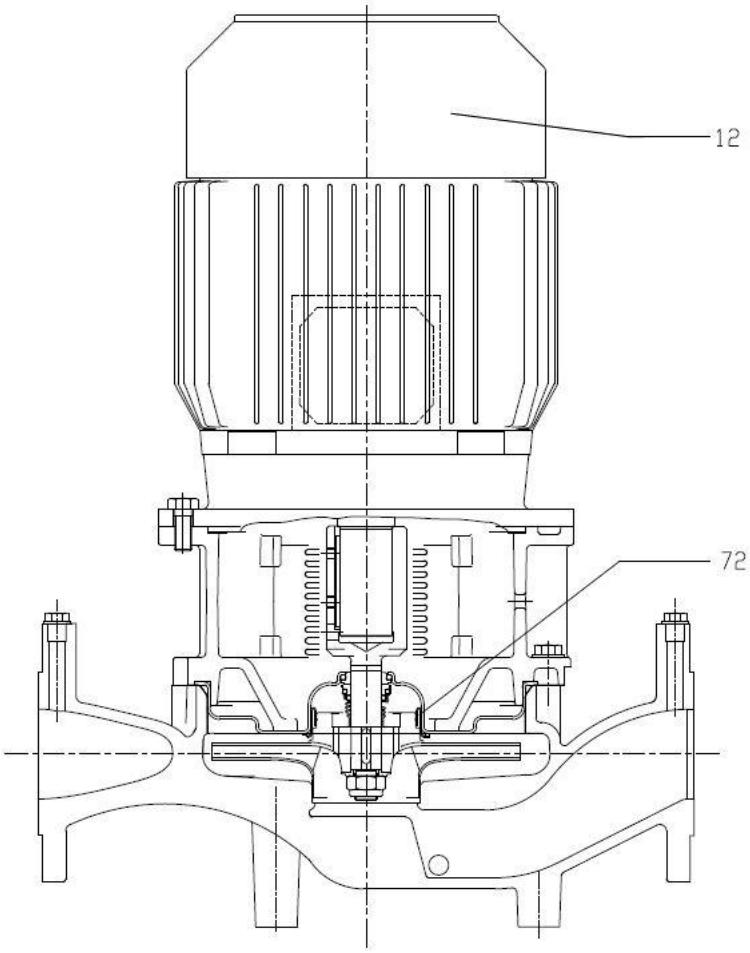



SECTIONAL VIEW TABLE 3ES4 50-200, 80-200

No	PART NAME		MATERIAL	DIMENSIONS	STANDARD	QTY
1	Casing		Cast iron EN-GJL-250-EN 1561			1
3	Motor bracket		Cast iron EN-GJL-200-EN 1561			1
4	Casing cover		EN 1.4301 (AISI 304)			1
6	Coupling - Part in contact with liquid		EN 1.4301 (AISI 304)			1
7	impeller	50-200	EN 1.4301 (AISI 304)			1
		80-200	EN 1.4401 (AISI 316)			
11	Mechanical seal [2]		SiC/met.Carbon/EPDM			1
12	Motor					1
24	Plug		Brass	G1/4	DIN 906	2
25	Drain plug		Brass	G1/4	DIN 906	4
26	O-ring		EPDM [3]	227.96x5.34	OR 6895	1
32	Key		EN 1.4401 (AISI 316)	6x6x25	UNI 6604	1
34	impeller nut		EN 1.4301 (AISI 304)	M16x1.5	UNI 7474	1
44	Protection		EN 1.4301 (AISI 304)		EBARA DRAWING	2
72	Casing ring (not for 80 version) [1]		EN 1.4301 (AISI 304)			1
200	Screw	50-200,80-200/2.2	Gv. Steel 8.8 strength class ISO 898/1	M10x35	UNI 5739	12
		80-200/3				10
206	Screw	from 0.55 to 1.5kW	Gv. Steel 8.8 strength class ISO 898/1	M10x25	UNI 5739	4
		for 2.2 and 3kW		M12x30		
235	Washer		Galvanized Steel	10.5x21	UNI 6592	12

[1] Only for version 32-200, 40-200,50-200, 65-160, 65-200

[2] Special version: see mechanical seal pages from 337 to 339

[3] FPM for Q1AVGG,Q4Q1VGG

EPDM for Q1AEGG, Q4Q1EGG

BEARINGS 3E 2POLE

Pump type	Ball bearing	
	Pump side	Fan side
3E 32-125/0.37	6203 2RSH	6202 2RSH
3E 32-125/0.55		
3E 32-125/0.75	6203-ZZ C3	6202-ZZ C3
3E 40-160/1.1	6205-ZZ C3	6203-ZZ C3
3E 40-160/1.5		
3E 40-160/2.2	E2 6205-ZZ C3	E2 6203-ZZ C3
3E 40-200/3.0	6205-ZZ C3	6205-ZZ C3
3E 40-200/4.0	6206-ZZ C3	
3E 40-200/7.5	6306-ZZ C3	6206-ZZ C3
3E 50-100/0.37	6203 2RSH	6202 2RSH
3E 50-100/0.55		
3E 50-100/0.75	6203-ZZ C3	6202-ZZ C3
3E 50-125/1.5	6205-ZZ C3	6203-ZZ C3
3E 50-125/2.2	E2 6205-ZZ C3	E2 6203-ZZ C3
3E 50-160/3.0	6205-ZZ C3	6205-ZZ C3
3E 50-160/4.0	6206-ZZ C3	
3E 50-200/5.5	6306-ZZ C3	6206-ZZ C3
3E 50-200/7.5		
3E 50-200/11	6308-ZZ C3	6208-ZZ C3
3E 65-100/0.55	6203 2RSH	6202 2RSH
3E 65-100/0.75	6203-ZZ C3	6202-ZZ C3
3E 65-100/1.1	6205-ZZ C3	6203-ZZ C3
3E 65-100/1.5		
3E 65-200/9.2	6308-ZZ C3	6208-ZZ C3
3E 65-200/11		
3E 65-200/15	6309-ZZ C3	6309-ZZ C3
3E 80-100/1.5	6205-ZZ C3	6203-ZZ C3
3E 80-100/2.2	E2 6205-ZZ C3	E2 6203-ZZ C3
3E 80-160/9.2	6308-ZZ C3	6208-ZZ C3
3E 80-160/11		
3E 80-160/15	6309-ZZ C3	6309-ZZ C3
3E 80-200/18.5		
3E 80-200/22		
3E 100-160/11	6308-ZZ C3	6208-ZZ C3
3E 100-160/15	6309-ZZ C3	6309-ZZ C3
3E 100-160/18.5		

BEARINGS 3E 4POLE

Pump type	Ball bearing	
	Pump side	Fan side
3E4 40-200/0.55	6205-2RSH C3	6203-2RSH
3E4 40-200/0.75	6205 ZZ C3	6205 ZZ C3
3E4 50-125/0.37	6205-2RSH C3	6202-2RSH
3E4 50-200/1.1	6205-ZZ C3	6205-ZZ C3
3E4 50-200/1.5		
3E4 65-160/0.75	6205 ZZ C3	6205 ZZ C3
3E4 65-160/1.1	6205-ZZ C3	6205-ZZ C3
3E4 80-200/2.2	6206-ZZ C3	6205-ZZ C3
3E4 80-200/3.0		
3E4 100-160/1.5	6205-ZZ C3	6205-ZZ C3
3E4 100-160/2.2	6206-ZZ C3	


BEARINGS 3ES 2POLE

Pump type	Ball bearing	
	Pump side	Fan side
3ES 32-125/0.75	6204-2Z C3	6203-2Z C3
3ES 40-160/1.5	6205-2Z C3	6205-2Z C3
3ES 40-160/2.2		
3ES 40-200/3.0	6206-2Z C3	6206-2Z C3
3ES 40-200/4.0	6306-2Z C3	6306-2Z C3
3ES 40-200/7.5	6208-2Z C3	6208-2Z C3
3ES 50-100/0.75	6204-2Z C3	6203-2Z C3
3ES 50-125/1.5	6205-2Z C3	6205-2Z C3
3ES 50-125/2.2		
3ES 50-160/3.0	6206-2Z C3	6206-2Z C3
3ES 50-160/4.0	6306-2Z C3	6306-2Z C3
3ES 50-200/5.5	6208-2Z C3	6208-2Z C3
3ES 50-200/7.5		
3ES 50-200/11	6309-2Z C3	6309-2Z C3
3ES 65-100/0.75	6204-2Z C3	6203-2Z C3
3ES 65-100/1.1	6204-2Z C3	6203-2Z C3
3ES 65-100/1.5	6205-2Z C3	6205-2Z C3
3ES 65-200/9.2	6208-2Z C3	6208-2Z C3
3ES 65-200/11	6309-2Z C3	6309-2Z C3
3ES 65-200/15		
3ES 80-100/1.5	6205-2Z C3	6205-2Z C3
3ES 80-100/2.2		
3ES 80-160/9.2	6208-2Z C3	6208-2Z C3
3ES 80-160/11	6309-2Z C3	6309-2Z C3
3ES 80-160/15		
3ES 80-200/18.5		
3ES 80-200/22	6311 C3	6311 C3
3ES 100-160/11	6309-2Z C3	6309-2Z C3
3ES 100-160/15		
3ES 100-160/18.5		

BEARINGS 3ES 4POLE

Pump type	Ball bearing	
	Pump side	Fan side
3ES4 40-200/0.55	6204-2Z C3	6204-2Z C3
3ES4 40-200/0.75		
3ES4 50-200/0.75	6204-2Z C3	6204-2Z C3
3ES4 50-200/1.1	6205-2Z C3	6205-2Z C3
3ES4 50-200/1.5		
3ES4 65-160/0.75	6204-2Z C3	6204-2Z C3
3ES4 65-160/1.1	6205-2Z C3	6205-2Z C3
3ES4 80-200/2.2	6206-2Z C3	6206-2Z C3
3ES4 80-200/3.0		
3ES4 100-160/1.5	6205-2Z C3	6205-2Z C3
3ES4 100-160/2.2	6206-2Z C3	6206-2Z C3


MECHANICAL SEAL (Standard and Special version) 3E 3ES 2 POLE

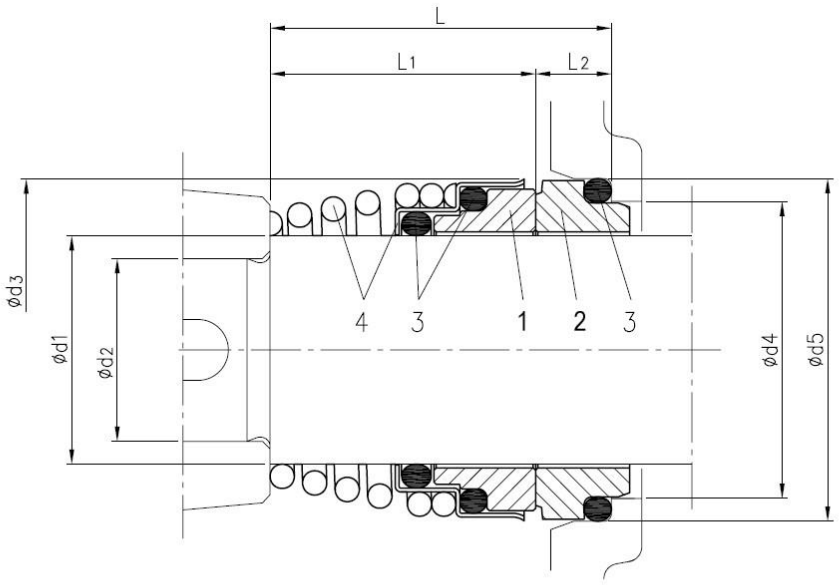

Version	Pump type	Dimensions [mm]								Material			
		d1	d2	d3	d4	d5	L	L1	L2	1 Rotary seal ring	2 Stationary seal ring	3 Rubber	4 Frame + Spring
Standard (Q1AEGG)	32-125 50-100 65-100/0.55-0.75	15	12	26	21	26.9	29	22	7	Silicon Carbide	Metallised Carbon	EPDM	EN 1.4401 (AISI 316)
	40-160/200 50-125/160/200 65-100/1.1-1.5 65-200 80-100 80-160/9.2-11	22	19	36	31	37	37.5	27.5	10				
	80-160/15 80-200 100-160	30	24	46	39	45	42.5	32.5	10				
Option 1 (Q4Q1EGG)	32-125 50-100 65-100/0.55-0.75	15	12	26	21	26.9	29	22	7	Silicon Carbide graphite	Silicon Carbide	EPDM	EN 1.4401 (AISI 316)
	40-160/200 50-125/160/200 65-100/1.1-1.5 65-200 80-100 80-160/9.2-11	22	19	36	31	37	37.5	27.5	10				
	80-160/15 80-200 100-160	30	24	46	39	45	42.5	32.5	10				

* The drawing is only indicative


MECHANICAL SEAL (Standard and Special version) 3E 3ES 2 POLE

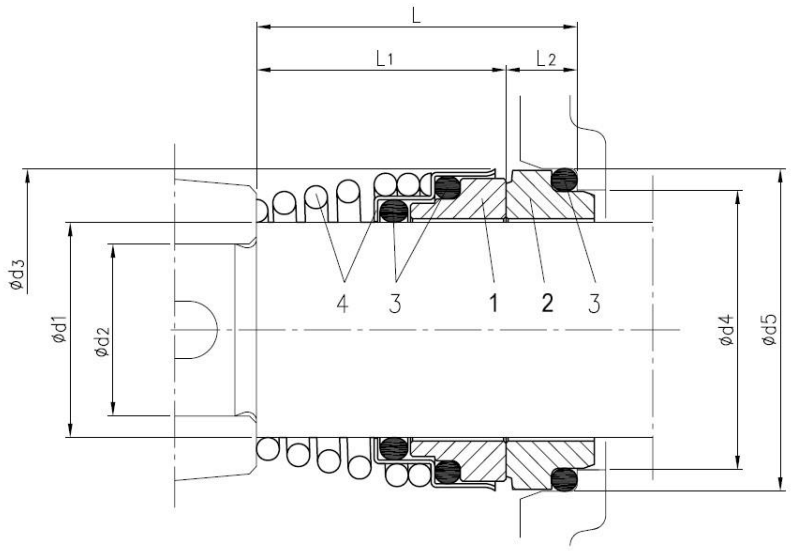

Version	Pump type	Dimensions [mm]								Material			
		d1	d2	d3	d4	d5	L	L1	L2	1 Rotary seal ring	2 Stationary seal ring	3 Rubber	4 Frame + Spring
Option 2 (Q4Q1VGG)	32-125 50-100 65-100/0.55-0.75	15	12	26	21	26.9	29	22	7	Silicon Carbide graphite	Silicon Carbide	FPM	EN 1.4401 (AISI 316)
	40-160/200 50-125/160/200 65-100/1.1-1.5 65-200 80-100 80-160/9.2-11	22	19	36	31	37	37.5	27.5	10				
	80-160/15 80-200 100-160	30	24	46	39	45	42.5	32.5	10				
Option 3 (Q1AVGG)	32-125 50-100 65-100/0.55-0.75	15	12	26	21	26.9	29	22	7	Silicon Carbide	Carbon (Metal)	FPM	EN 1.4401 (AISI 316)
	40-160/200 50-125/160/200 65-100/1.1-1.5 65-200 80-100 80-160/9.2-11	22	19	36	31	37	37.5	27.5	10				
	80-160/15 80-200 100-160	30	24	46	39	45	42.5	32.5	10				

* The drawing is only indicative


MECHANICAL SEAL (Standard and Special version) 3E 3ES 4 POLE

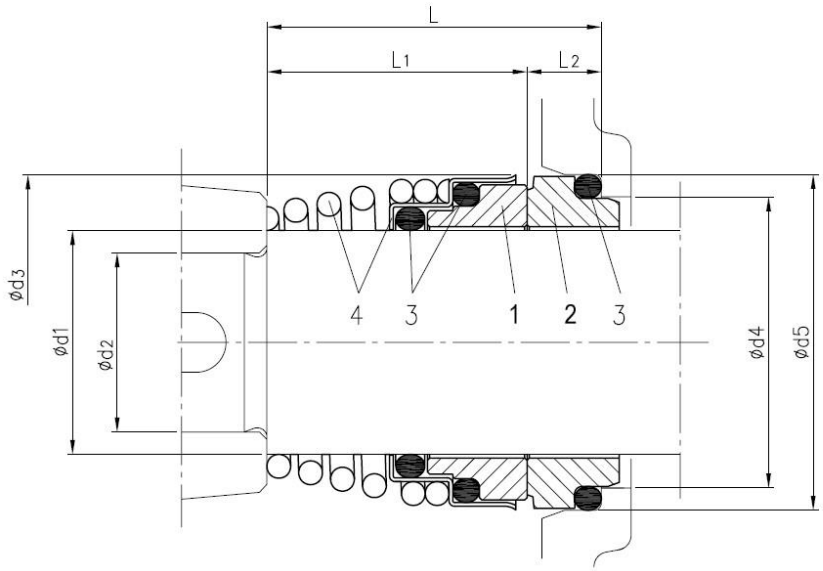

Version	Pump type	Dimensions [mm]								Material			
		d1	d2	d3	d4	d5	L	L1	L2	1 Rotary seal ring	2 Stationary seal ring	3 Rubber	4 Frame + Spring
Standard (Q1AEGG)	40-200 50-125/200 65-160 80-200 100-160	22	19	36	31	37	37.5	27.5	10	Silicon Carbide	Metallised Carbon	EPDM	EN 1.4401 (AISI 316)
Option 1 (Q4Q1EGG)	40-200 50-125/200 65-160 80-200 100-160	22	19	36	31	37	37.5	27.5	10	Silicon Carbide graphite	Silicon Carbide	EPDM	EN 1.4401 (AISI 316)
Option 2 (Q4Q1VGG)	40-200 50-125/200 65-160 80-200 100-160	22	19	36	31	37	37.5	27.5	10	Silicon Carbide graphite	Silicon Carbide	FPM	EN 1.4401 (AISI 316)
Option 3 (Q1AVGG)	40-200 50-125/200 65-160 80-200 100-160	22	19	36	31	37	37.5	27.5	10	Silicon Carbide	Carbon (Metal)	FPM	EN 1.4401 (AISI 316)


* The drawing is only indicative

COUPLING 3ES 2 POLE

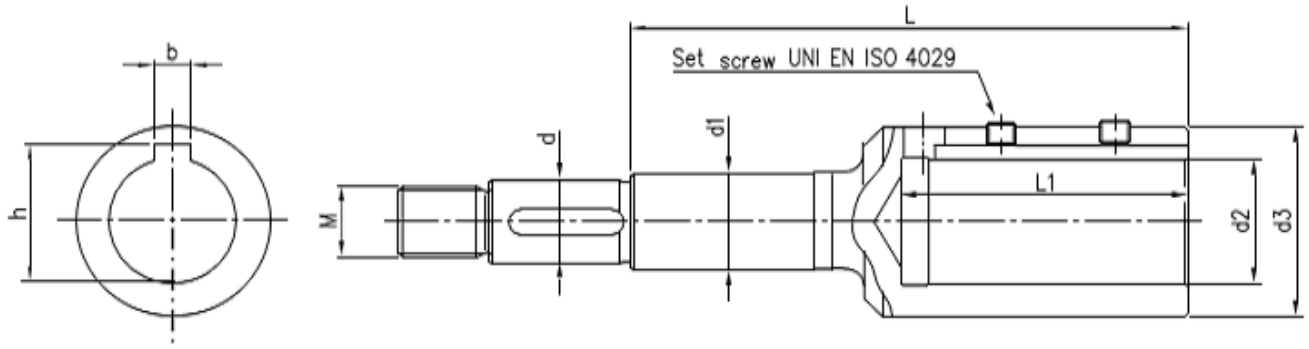


Pump type	Power [kW]	Power [HP]	Motor Size	Dimensions mm d	d1	d2	d3	M	L	L1	b	h	Set screw
32-125/0.75	0.75	1	80	12	15	19	33	M10x1.25	102.5	43	6	21.8	M6x6
40-160/1.5	1.5	2	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8
40-160/2.2	2.2	3	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8
40-200/3.0	3	4	100	19	22	28	43	M16x1.5	122	63	8	31.3	M8x8
40-200/4.0	4	5.5	112	19	22	28	43	M16x1.5	122	63	8	31.3	M8x8
40-200/7.5	7.5	10	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8
50-100/0.75	0.8	1	80	12	15	19	33	M10x1.25	102.5	43	6	21.8	M6x6
50-125/1.5	1.5	2	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8
50-125/2.2	2.2	3	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8
50-160/3.0	3	4	100	19	22	28	43	M16x1.5	122	63	8	31.3	M8x8
50-160/4.0	4	5.5	112	19	22	28	43	M16x1.5	122	63	8	31.3	M8x8
50-200/5.5	5.5	7.5	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8
50-200/7.5	7.5	10	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8
50-200/11	11	15	160	19	22	42	63	M16x1.5	178	114	12	45.3	M8x8
65-100/0.75	0.75	1	80	12	15	19	33	M10x1.25	102.5	43	6	21.8	M6x6
65-100/1.1	1.1	2	80	12	15	19	33	M10x1.25	102.5	43	6	21.8	M6x6
65-100/1.5	1.5	2	90	12	15	19	33	M10x1.25	102.5	43	6	21.8	M6x6
65-200/9.2	9.2	12.5	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8
65-200/11	11	15	160	19	22	42	63	M16x1.5	178	114	12	45.3	M8x8
65-200/15	15	20	160	22	22	42	63	M18x1.5	209	114	12	45.3	M8x8
80-100/1.5	1.5	2	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8
80-100/2.2	2.2	3	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8
80-160/9.2	9.2	12.5	132	19	22	38	58	M16x1.5	145	84	10	41.3	M8x8
80-160/11	11	15	160	19	22	42	63	M16x1.5	178	114	12	45.3	M8x8
80-160/15	15	20	160	24	30	42	63	M20x1.5	184	114	12	45.3	M8x8
80-200/18.5	18.5	25	160	24	30	42	63	M20x1.5	184	114	12	45.3	M8x8
80-200/22	22	30	180	24	30	48	72	M20x1.5	184	114	14	51.8	M10x10
100-160/11	11	15	160	24	30	42	63	M20x1.5	184	114	12	45.3	M8x8
100-160/15	15	20	160	24	30	42	63	M20x1.5	184	114	12	45.3	M8x8
100-160/18.5	18.5	25	160	24	30	42	63	M20x1.5	184	114	12	45.3	M8x8

COUPLING 3ES 4 POLE

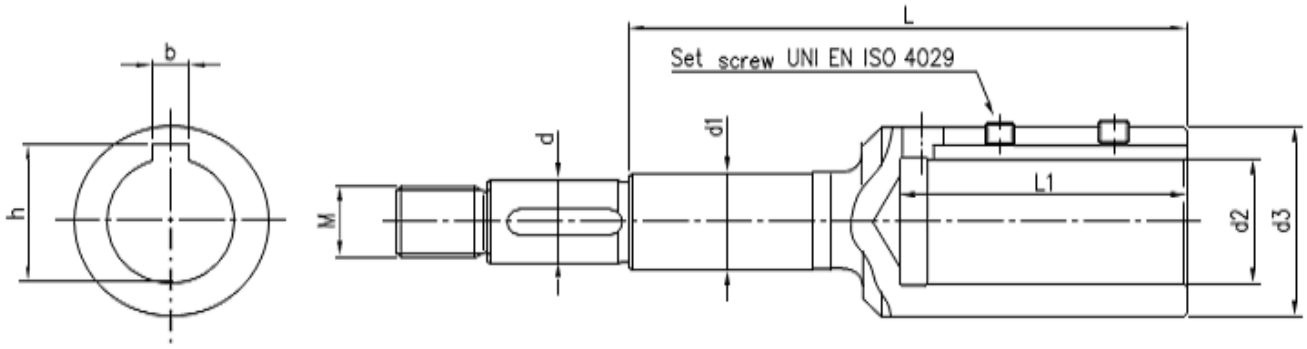

Pump type	Power [kW]	Power [HP]	Motor Size	Dimensions mm d	d1	d2	d3	M	L	L1	b	h	Set screw
40-200/0.55	0.55	0.75	80	19	22	19	33	M16x1.5	98	43	6	21.8	M6x6
40-200/0.75	0.75	1	80	19	22	19	33	M16x1.5	98	43	6	21.8	M6x6
50-200/0.75	0.75	1.5	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8
50-200/1.1	1.1	1.5	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8
50-200/1.5	1.5	2	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8
65-160/0.75	0.75	1.5	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8
65-160/1.1	1.1	1.5	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8
80-200/2.2	2.2	3	100	19	22	28	43	M16x1.5	122	63	8	31.3	M8x8
80-200/3	3	4	100	19	22	28	43	M16x1.5	122	63	8	31.3	M8x8
100-160/1.5	1.5	2	90	19	22	24	39	M16x1.5	110	53	8	27.3	M8x8
100-160/2.2	2.2	3	100	19	22	28	43	M16x1.5	122	63	8	31.3	M8x8

BASE PLATE



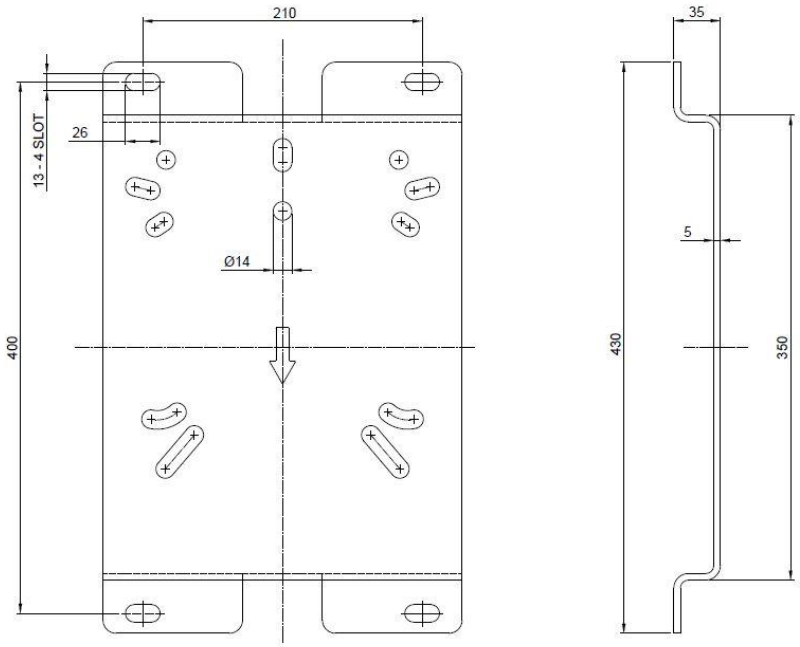


Standard accessory for 11kW or above models


Type	Pump Models	Hexagon head screws
Type 1	50-200 65-200 100-250	3XM12
	80-160,80-200,80-250 100-160,100-200	4XM12

(*) Base Plate for 9.2kW or below models is not available

COUNTER FLANGE

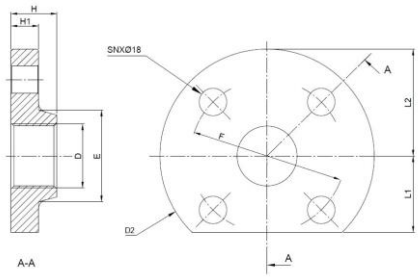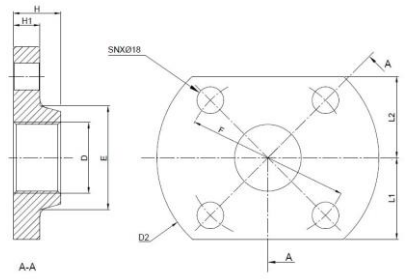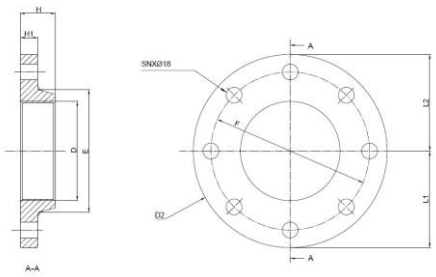Counter flange	Pump type	Rated Pressure (PN)	Dimension (mm) Counterflange DN	D	D2	E	F	H	H1	L1	L2	SN	Bolt Dimension	Bolt Material
	32-125 40-200 50-125 50-160 65-160 80-100	16	32	Rp 1"1/4	140	60	100	30	18	50	70	4	M16X55	A2-70 ISO 3506-1
		16	40	Rp 1"1/2	150	70	110	32	18	55	75	4		
		16	50	Rp 2"	165	84	125	28	18	62.5	82.5	4		
		16	65	Rp 2"1/2	185	104	145	32	18	72.5	92.5	4		
		16	80	Rp 3"	200	118	160	34	20	95	100	8	M16X60	
	40-160 50-100 50-200 65-100 65-200	16	40	Rp 1"1/2	150	70	110	32	18	55	55	4	M16X55	
		16	50	Rp 2"	165	84	125	28	18	62.5	62.5	4		
		16	65	Rp 2"1/2	185	104	145	32	18	72.5	72.5	4		
	80-160 80-200 100-160	16	80	Rp 3"	200	118	160	34	20	100	100	8	M16X60	
		16	100	Rp 4"	220	140	180	40	20	110	110	8		

GASKET

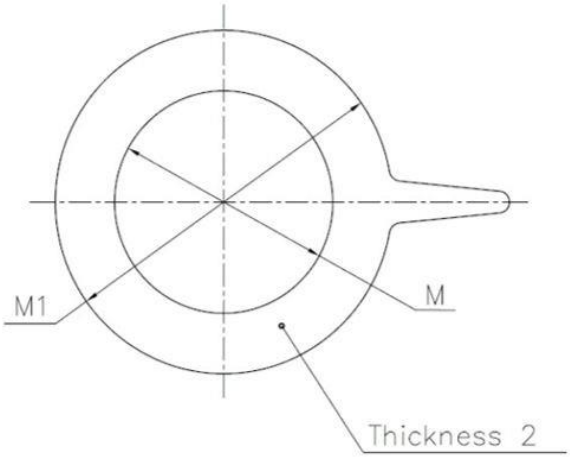


MATERIAL : EPDM

Dimensions [mm]


DN	M	M1
32	38	82
40	50	93
50	60	107
65	80	125
80	90	140
100	115	160

DIMENSIONS & WEIGHT 3E 2 POLES

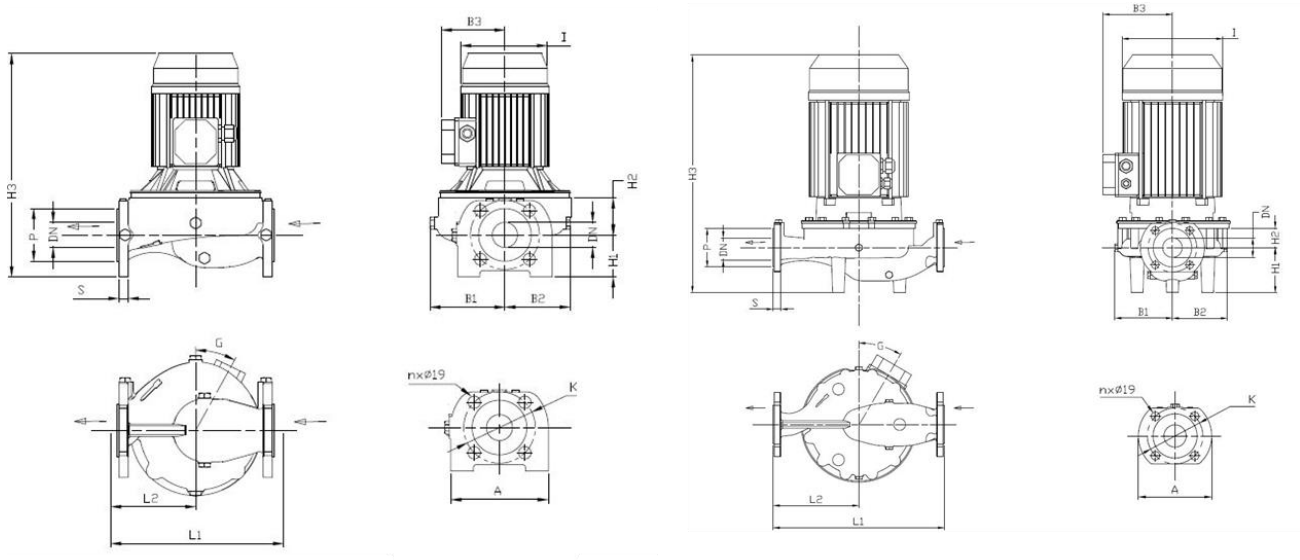


Model	Dimensions [mm]																Weight [kgf]
	Ø DN	Ø P	Ø K	S	L1	L2	H1	H2	H3	B1	B2	B3	G	I	n	A	
32-125/0.37	32	76	100	18	280	140	79	38	347	115	103	102	0	141	4	140	16.7
32-125/0.55	32	76	100	18	280	140	79	38	347	115	103	102	0	141	4	140	18.2
32-125/0.75	32	76	100	18	280	140	79	38	347	115	103	101	0	140	4	140	19.4
40-160/1.1	40	84	110	18	320	160	68	50	395	127	127	124	19	176	4	150	29.6
40-160/1.5	40	84	110	18	320	160	68	50	395	127	127	124	17	176	4	150	29.6
40-160/2.2	40	84	110	18	320	160	68	50	420	127	127	124	18	176	4	150	32.1
40-200/3.0	40	84	110	18	340	170	100	50	490	146	146	124	15	176	4	150	41.8
40-200/4.0	40	84	110	18	340	170	100	50	513	146	146	141	15	193	4	150	44.3
40-200/7.5	40	84	110	18	340	170	100	50	558	146	146	150	15	220	4	150	59.4
50-100/0.37	50	99	125	20	280	140	75	47	352	125	108	102	0	141	4	165	19.4
50-100/0.55	50	99	125	20	280	140	75	47	352	125	108	102	0	141	4	165	20.9
50-100/0.75	50	99	125	20	280	140	75	47	352	125	108	101	0	140	4	165	22.1
50-125/1.5	50	99	125	20	340	170	115	40	441	124	105	124	0	176	4	165	28.4
50-125/2.2	50	99	125	20	340	170	115	40	466	124	105	124	0	176	4	165	30.4
50-160/3.0	50	99	125	20	340	170	115	50	505	134	126	124	18	176	4	165	35.8
50-160/4.0	50	99	125	20	340	170	115	50	528	134	126	141	18	193	4	165	44.8
50-200/5.5	50	99	125	20	440	220	115	50	553	148	141	150	0	220	4	165	79.3
50-200/7.5	50	99	125	20	440	220	115	50	574	148	141	150	0	220	4	165	56.9
50-200/11	50	99	125	20	440	170	115	50	609	148	141	178	0	259	4	165	79.3
65-100/0.55	65	118	145	20	340	170	82	40	353	115	100	102	0	141	4	185	22.4
65-100/0.75	65	118	145	20	340	170	82	40	352	115	100	101	0	140	4	185	23.6
65-100/1.1	65	118	145	20	340	170	82	40	408	115	100	124	0	176	4	185	29.4
65-100/1.5	65	118	145	20	340	170	82	40	408	115	100	124	0	176	4	185	28.7
65-200/9.2	65	118	145	20	475	237.5	125	50	620	151	141	178	0	259	4	185	81.8
65-200/11	65	118	145	20	475	237.5	125	50	619	151	141	178	0	259	4	185	81.8
65-200/15	65	118	145	20	475	237.5	125	50	747	151	141	223	0	309	4	185	123.5
80-100/1.5	80	132	160	22	360	175	97	48	431	134	108	124	0	176	8	200	34.5
80-100/2.2	80	132	160	22	360	175	97	48	457	134	108	124	0	176	8	200	36.5
80-160/9.2	80	132	160	22	440	220	115	50	609	146	141	178	0	259	8	200	86.2
80-160/11	80	132	160	22	440	220	115	50	609	146	141	178	0	259	8	200	88.6
80-160/15	80	132	160	22	440	220	115	50	746	146	141	223	0	309	8	200	130.3
80-200/18.5	80	132	160	22	500	250	115	50	746	160	141	223	0	309	8	200	148.1
80-200/22	80	132	160	22	500	250	115	50	746	160	141	223	0	309	8	200	159.9
100-160/11	100	156	180	24	550	275	140	64	636	173	141	178	0	259	8	230	98.9
100-160/15	100	156	180	24	550	275	140	64	786	173	141	223	0	309	8	230	130.0
100-160/18.5	100	156	180	24	550	275	140	64	786	173	141	223	0	309	8	230	144.2

DIMENSIONS & WEIGHT 3E 4 POLES

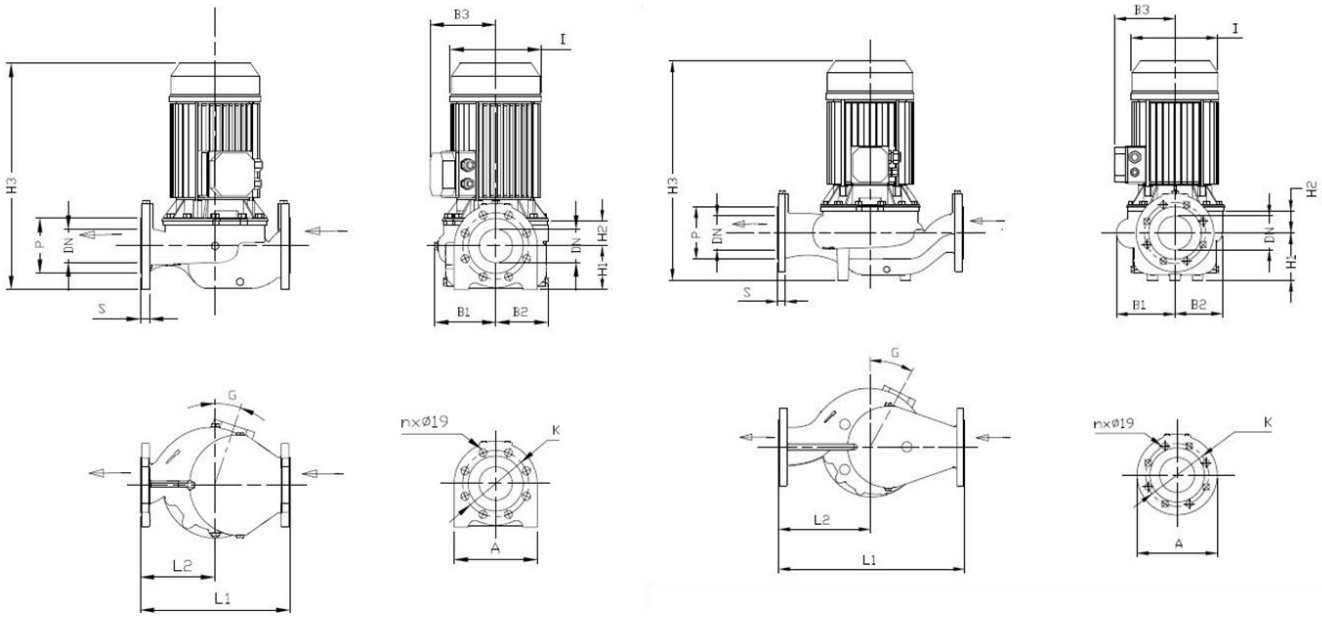


Model	Dimensions [mm]																Weight [kgf]
	Ø DN	Ø P	Ø K	S	L1	L2	H1	H2	H3	B1	B2	B3	G	I	n	A	
40-200/0.55	40	84	110	18	340	170	100	50	412	146	146	119	15	159	4	150	30.2
40-200/0.75	40	84	110	18	340	170	100	50	452	146	146	124	15	176	4	150	33.8
50-125/0.37	50	99	125	20	340	170	115	40	406	124	105	102	0	141	4	165	23.2
50-200/0.75	50	99	125	20	440	220	115	50	467	148	141	124	0	176	4	165	37.3
50-200/1.1	50	99	125	20	440	220	115	50	467	148	141	124	0	176	4	165	38.2
50-200/1.5	50	99	125	20	440	220	115	50	506	148	141	124	0	176	4	165	39.9
65-160/0.75	65	118	145	20	360	180	105	50	457	141	141	124	0	176	4	185	37.5
65-160/1.1	65	118	145	20	360	180	105	50	457	141	141	124	0	176	4	185	40.3
80-200/2.2	80	132	160	22	500	250	115	50	489	160	141	141	0	193	8	200	48.3
80-200/3.0	80	132	160	22	500	250	115	50	529	160	141	141	0	193	8	200	56.3
100-160/1.5	100	156	180	24	550	275	140	64	543	173	141	124	0	176	8	230	51.9
100-160/2.2	100	156	180	24	550	275	140	64	528	173	141	141	0	193	8	230	51.9

DIMENSIONS & WEIGHT 3ES 2 POLES

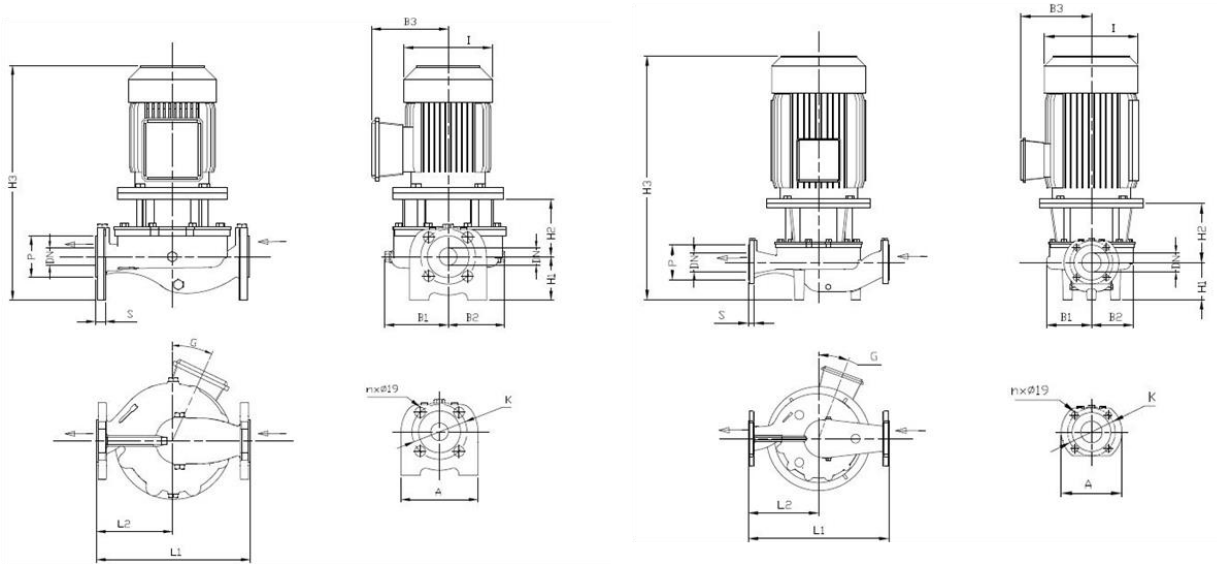

Model	Dimensions [mm]																Weight [kgf]
	Ø DN	Ø P	Ø K	S	L1	L2	H1	H2	H3	B1	B2	B3	G	I	n	A	
32-125/0.75	32	76	100	18	280	140	79	116	427	115	103	139	0	160	4	140	27.8
40-160/1.5	40	84	110	18	320	160	68	130	465	127	127	148	18	180	4	150	32.5
40-160/2.2	40	84	110	18	320	160	68	130	465	127	127	148	18	180	4	150	36.6
40-200/3.0	40	84	110	18	340	170	100	142	548	146	146	155	15	196	4	150	53.6
40-200/4.0	40	84	110	18	340	170	100	142	570	146	146	171	15	225	4	150	55.1
40-200/7.5	40	84	110	18	340	170	100	165	650	146	146	194	14	248	4	150	86.3
50-100/0.75	50	99	125	20	280	140	75	125	432	125	108	139	0	160	4	165	27.8
50-125/1.5	50	99	125	20	340	170	115	130	512	124	105	148	0	180	4	165	30.3
50-125/2.2	50	99	125	20	340	170	115	130	512	124	105	148	0	180	4	165	38.8
50-160/3.0	50	99	125	20	340	170	115	142	563	134	126	155	18	196	4	165	62.4
50-160/4.0	50	99	125	20	340	170	115	257	585	134	126	171	18	225	4	165	48.6
50-200/5.5	50	99	125	20	440	220	115	165	642	148	141	198	0	248	4	165	127.7
50-200/7.5	50	99	125	20	440	220	115	165	642	148	141	198	0	248	4	165	76.6
50-200/11	50	99	125	20	440	220	115	198	811	148	141	238	0	317	4	165	127.7
65-100/0.75	65	118	145	20	340	170	82	118	432	115	100	139	0	160	4	185	32.0
65-100/1.1	65	118	145	20	340	170	82	118	432	115	100	139	0	160	4	185	32.0
65-100/1.5	65	118	145	20	340	170	82	130	479	115	100	148	0	180	4	185	30.6
65-200/9.2	65	118	145	20	475	237.5	125	165	692	151	141	198	0	248	4	185	130.2
65-200/11	65	118	145	20	475	237.5	125	198	821	151	141	238	0	317	4	185	130.2
65-200/15	65	118	145	20	475	237.5	125	198	821	151	141	238	0	317	4	185	166.3
80-100/1.5	80	132	160	22	360	175	97	138	502	134	108	148	0	180	8	200	36.4
80-100/2.2	80	132	160	22	360	175	97	138	502	134	108	148	0	180	8	200	40.0
80-160/9.2	80	132	160	22	440	220	115	165	682	146	141	198	0	248	8	200	109.2
80-160/11	80	132	160	22	440	220	115	198	811	146	141	238	0	317	8	200	108.0
80-160/15	80	132	160	22	440	220	115	208	821	146	141	238	0	317	8	200	144.1
80-200/18.5	80	132	160	22	500	250	115	208	865	160	141	238	0	317	8	200	160.3
80-200/22	80	132	160	22	500	250	115	208	900	160	141	268	0	360	8	200	198.8
100-160/11	100	156	180	24	550	275	140	222	860	173	141	238	0	317	8	230	144.7
100-160/15	100	156	180	24	550	275	140	222	860	173	141	238	0	317	8	230	155.9
100-160/18.5	100	156	180	24	550	275	140	222	904	173	141	238	0	317	8	230	150.1


DIMENSIONS & WEIGHT 3ES 4 POLES

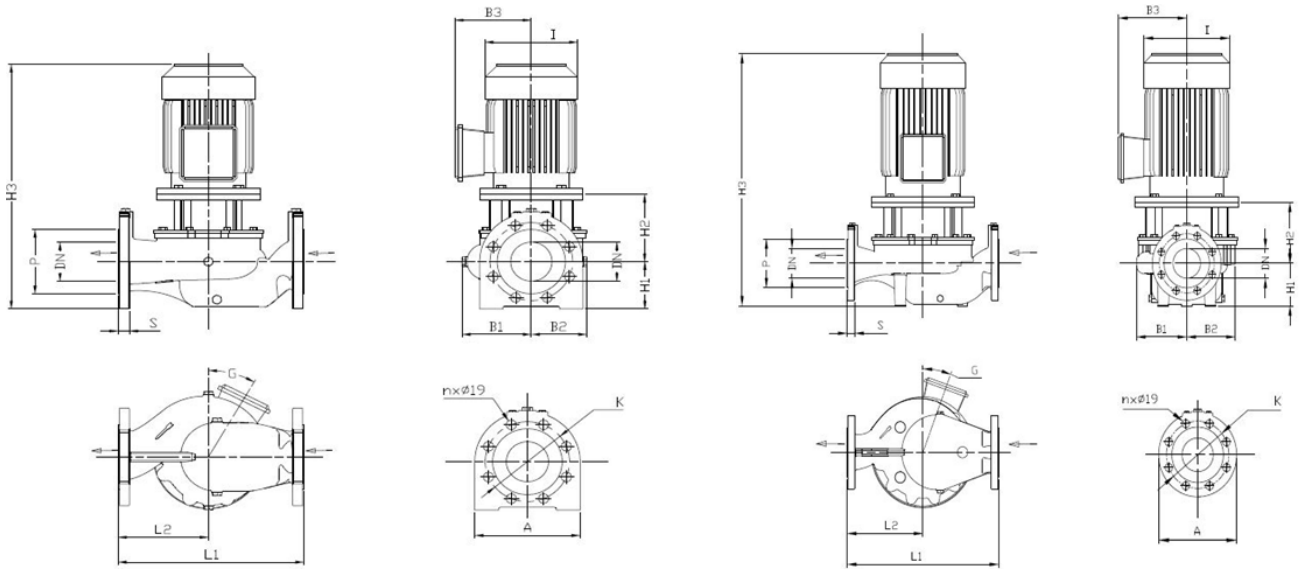

Model	Dimensions [mm]																	Weight [kgf]
	Ø DN	Ø P	Ø K	S	L1	L2	H1	H2	H3	H4	B1	B2	B3	G	I	n	A	
40-200/0.55	40	84	110	18	340	170	100	118	450	35	146	146	139	14	160	4	150	38.7
40-200/0.75	40	84	110	18	340	170	100	118	450	35	146	146	139	15	160	4	150	35.2
50-200/0.75	50	99	125	20	440	220	115	118	465	35	148	141	139	0	160	4	165	38.7
50-200/1.1	50	99	125	20	440	220	115	130	512	35	148	141	148	0	180	4	165	46.1
50-200/1.5	50	99	125	20	440	220	115	130	512	35	148	141	148	0	180	4	165	47.7
65-160/0.75	65	118	145	20	360	180	105	118	455	35	141	141	139	0	160	4	185	38.9
65-160/1.1	65	118	145	20	360	180	105	235	502	35	141	141	148	0	180	4	185	47.8
80-200/2.2	80	132	160	22	500	250	115	142	563	35	160	141	155	0	196	8	200	65.1
80-200/3.0	80	132	160	22	500	250	115	142	563	35	160	141	155	0	196	8	200	66.8
100-160/1.5	100	156	180	24	550	275	140	144	551	35	173	141	148	0	177	8	230	76.3
100-160/2.2	100	156	180	24	550	275	140	156	602	35	173	141	155	0	196	8	230	99.8

PACKING 3E - 2POLE


Pump Type	Packing [mm]			Pack Type	Total net weight (kg)
	Z	X	Y		
3E 32-125/0.37	350	290	420	1	16.7
3E 32-125/0.55	350	290	420		18.2
3E 32-125/0.75	350	290	420		19.4
3E 40-160/1.1	450	390	610	2	34.7
3E 40-160/1.5	450	390	610		34.7
3E 40-160/2.2	450	390	610		37.2
3E 40-200/3.0	450	390	700		46.9
3E 40-200/4.0	450	390	700		49.4
3E 40-200/7.5	450	390	700		64.5
3E 50-100/0.37	450	390	610		24.5
3E 50-100/0.55	450	390	610		26
3E 50-100/0.75	450	390	610		27.2
3E 50-125/1.5	450	390	610		33.5
3E 50-125/2.2	450	390	610		35.5
3E 50-160/3.0	450	390	700		40.9
3E 50-160/4.0	450	390	700		49.9
3E 50-200/5.5	640	530	785		89.3
3E 50-200/7.5	640	530	785		66.9
3E 50-200/11	640	530	785		89.3
3E 65-100/0.55	450	390	610		27.5
3E 65-100/0.75	450	390	610		28.7
3E 65-100/1.1	450	390	610		34.5
3E 65-100/1.5	450	390	610		33.8
3E 65-200/9.2	640	530	785		91.8
3E 65-200/11	640	530	1045		91.8
3E 65-200/15	640	530	1045		133.5
3E 80-100/1.5	450	390	610		39.6
3E 80-100/2.2	450	390	610		41.6
3E 80-160/9.2	640	530	785		96.2
3E 80-160/11	640	530	785		98.6
3E 80-160/15	640	530	1045		140.3
3E 80-200/18.5	640	530	1045		158.1
3E 80-200/22	640	530	1045		169.9
3E 100-160/11	640	530	1045		108.9
3E 100-160/15	640	530	1045		140
3E 100-160/18.5	640	530	1045		154.2

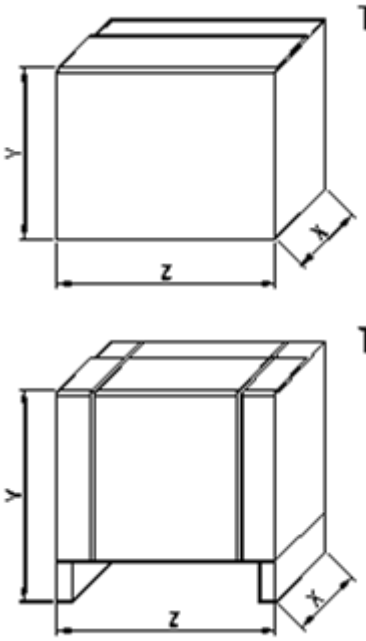

0


PACKING 3E - 4POLE

Pump Type	Packing [mm]			Pack Type	Total net weight (kg)
	Z	X	Y		
3E4 40-200/0.55	450	390	610	2	35.3
3E4 40-200/0.75	450	390	610		38.9
3E4 50-125/0.37	450	390	610		28.3
3E4 50-200/0.75	640	530	785		47.3
3E4 50-200/1.1	640	530	785		48.2
3E4 50-200/1.5	640	530	785		49.9
3E4 65-160/0.75	450	390	610		42.6
3E4 65-160/1.1	450	390	610		45.4
3E4 80-200/2.2	640	530	785		58.3
3E4 80-200/3.0	640	530	785		66.3
3E4 100-160/1.5	640	530	785		61.9
3E4 100-160/2.2	640	530	785		61.9

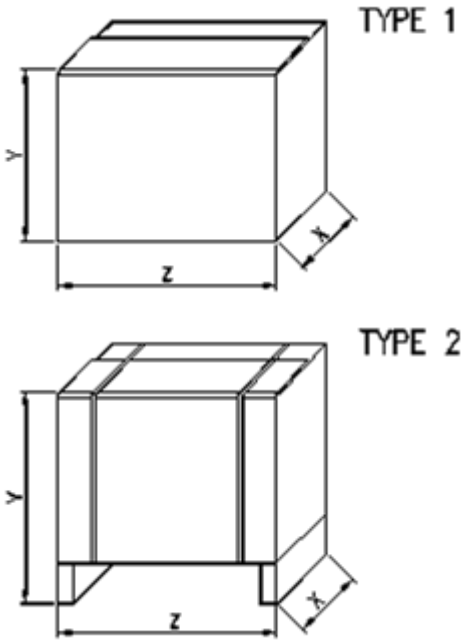


PACKING 3ES - 2POLE

Pump Type	Packing [mm]			Pack Type	Total net weight (kg)
	Z	X	Y		
3ES 32-125/0.75	450	390	610	2	32.9
3ES 40-160/1.5	450	390	610		37.6
3ES 40-160/2.2	450	390	610		41.7
3ES 40-200/3.0	450	390	700		58.7
3ES 40-200/4.0	640	530	785		65.1
3ES 40-200/7.5	640	530	785		96.3
3ES 50-100/0.75	450	390	610		32.9
3ES 50-125/1.5	450	390	700		35.4
3ES 50-125/2.2	450	390	700		43.9
3ES 50-160/3.0	450	390	700		67.5
3ES 50-160/4.0	640	530	785		58.6
3ES 50-200/5.5	640	530	785		137.7
3ES 50-200/7.5	640	530	785		86.6
3ES 50-200/11	640	530	1045		137.7
3ES 65-100/0.75	450	390	610		37.1
3ES 65-100/1.1	450	390	610		37.1
3ES 65-100/1.5	450	390	610		35.7
3ES 65-200/9.2	640	530	1045		140.2
3ES 65-200/11	640	530	1045		140.2
3ES 65-200/15	640	530	1045		176.3
3ES 80-100/1.5	450	390	700		41.5
3ES 80-100/2.2	450	390	700		45.1
3ES 80-160/9.2	640	530	1045		119.2
3ES 80-160/11	640	530	1045		118
3ES 80-160/15	640	530	1045		154.1
3ES 80-200/18.5	640	530	1045		170.3
3ES 80-200/22	760	610	1280		214.6
3ES 100-160/11	640	530	1045		154.7
3ES 100-160/15	640	530	1045		165.9
3ES 100-160/18.5	760	610	1280		165.9

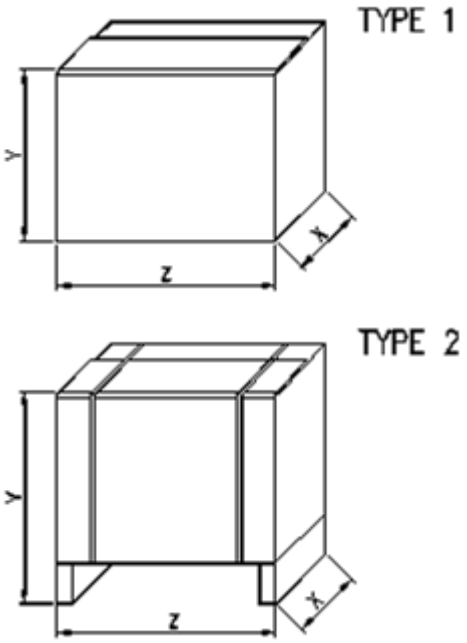

PACKING 3ES - 4POLE

Pump Type	Packing [mm]			Pack Type	Total net weight (kg)
	Z	X	Y		
3ES4 40-200/0.55	450	390	610		43.8
3ES4 40-200/0.75	450	390	610		40.3
3ES4 50-200/0.75	640	530	785		48.7
3ES4 50-200/1.1	640	530	785		56.1
3ES4 50-200/1.5	640	530	785		57.7
3ES4 65-160/0.75	450	390	610	2	44
3ES4 65-160/1.1	450	390	700		52.9
3ES4 80-200/2.2	640	530	785		75.1
3ES4 80-200/3.0	640	530	785		76.8
3ES4 100-160/1.5	640	530	785		86.3
3ES4 100-160/2.2	640	530	785		109.8

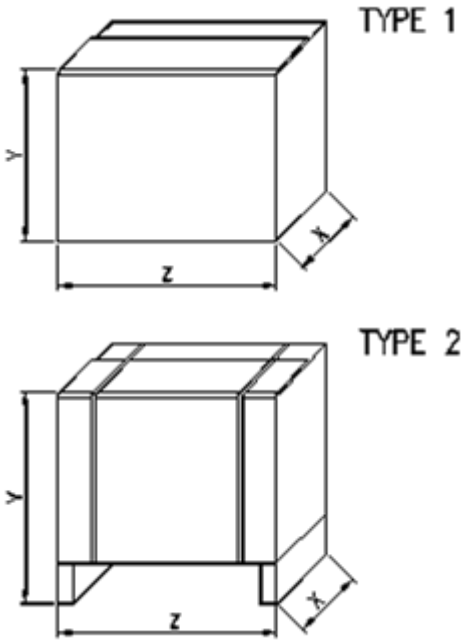

MOTOR DATA 3E - 2POLE

Pump type	Motor Power		Efficiency	Input [kW]	Efficiency (% load)			Full load current [A]			Locked rotor current [A]		
	[kW]	[HP]			50%	75%	100%	230 V	400 V	690 V	230 V	400 V	690 V
3E 32-125/0.37	0.37	0.5	IE2	0.71	75.1	78.5	78	2.4	1.4	-	12.7	7.30	-
3E 32-125/0.55	0.55	0.75		0.91	80.2	82.8	82.9	3.0	1.7	-	20.5	11.8	-
3E 32-125/0.75	0.75	1	IE3	1.05	80.9	82.3	82.1	3.3	1.9	-	19.7	11.4	-
3E 40-160/1.1	1.1	1.5		1.77	83.5	84.3	84.6	5.8	3.3	-	47.4	27.4	-
3E 40-160/1.5	1.5	2		1.77	83.5	84.3	84.6	5.8	3.3	-	47.4	27.4	-
3E 40-160/2.2	2.2	3		2.55	86.2	87.0	86.0	8.2	4.7	-	66.6	38.4	-
3E 40-200/3.0	3	4		3.44	85.9	87.5	87.1	11.1	6.4	-	90.0	52.0	-
3E 40-200/4.0	4	5.5		4.52	85.8	88.3	88.4	15.1	8.7	-	131.8	76.1	-
3E 40-200/7.5	7.5	10		8.26	89	90.7	90.8	-	13.6	7.9	-	144.0	83.0
3E 50-100/0.37	0.37	0.5	IE2	0.71	75.1	78.5	78	2.4	1.4	-	12.7	7.30	-
3E 50-100/0.55	0.55	0.75		0.91	80.2	82.8	82.9	3.0	1.7	-	20.5	11.8	-
3E 50-100/0.75	0.75	1	IE3	1.05	80.9	82.3	82.1	3.3	1.9	-	19.7	11.4	-
3E 50-125/1.5	1.5	2		1.77	83.5	84.3	84.6	5.8	3.3	-	47.4	27.4	-
3E 50-125/2.2	2.2	3		2.55	86.2	87.0	86.0	8.2	4.7	-	66.6	38.4	-
3E 50-160/3.0	3.0	4		3.44	85.9	87.5	87.1	11.1	6.4	-	90.0	52.0	-
3E 50-160/4.0	4	5.5		4.52	85.8	88.3	88.4	15.1	8.7	-	131.8	76.1	-
3E 50-200/5.5	5.5	7.5		6.09	89.2	90.6	90.4	-	10.6	6.1	-	115.3	67.0
3E 50-200/7.5	7.5	10		8.26	89	90.7	90.8	-	13.6	7.9	-	144.0	83.0
3E 50-200/11	11	15		11.98	90.4	91.2	91.8	-	21.3	12.3	-	184.0	107.0
3E 65-100/0.55	0.55	0.75	IE2	0.91	80.2	82.8	82.9	3.0	1.7	-	20.5	11.8	-
3E 65-100/0.75	0.75	1	IE3	1.05	80.9	82.3	82.1	3.3	1.9	-	19.7	11.4	-
3E 65-100/1.1	1.1	1.5		1.77	83.5	84.3	84.6	5.8	3.3	-	47.4	27.4	-
3E 65-100/1.5	1.5	2		1.77	83.5	84.3	84.6	5.8	3.3	-	47.4	27.4	-
3E 65-200/9.2	9.2	12.5		10.12	90.1	90.8	90.9	-	17.2	10.0	-	166.0	96.0
3E 65-200/11	11	15		11.98	90.4	91.2	91.8	-	21.3	12.3	-	184.0	107.0
3E 65-200/15	15	20		16.32	91.2	92.0	91.9	-	27.7	17.3	-	225.0	130.0
3E 80-100/1.5	1.5	2		1.77	83.5	84.3	84.6	5.8	3.3	-	47.4	27.4	-
3E 80-100/2.2	2.2	3		2.55	86.2	87.0	86.0	8.2	4.7	-	66.6	38.4	-
3E 80-160/9.2	9.2	12.5		10.12	90.1	90.8	90.9	-	17.2	10.0	-	166.0	96.0
3E 80-160/11	11	15		11.98	90.4	91.2	91.8	-	21.3	12.3	-	184.0	107.0
3E 80-160/15	15	20		16.32	91.2	92.0	91.9	-	27.7	17.3	-	225.0	130.0
3E 80-200/18.5	18.5	25		19.98	91.6	93.0	92.6	-	35.0	20.3	-	328.0	190.0
3E 80-200/22	22	30		23.58	92.0	93.1	93.2	-	39.7	23.6	-	391.0	227.0
3E 100-160/11	11	15		11.98	90.4	91.2	91.8	-	21.3	12.3	-	184.0	107.0
3E 100-160/15	15	20		16.32	91.2	92.0	91.9	-	27.7	17.3	-	225.0	130.0
3E 100-160/18.5	18.5	25		19.98	91.6	93.0	92.6	-	35.0	20.3	-	328.0	190.0

MOTOR DATA 3E - 4POLE

Pump type	Motor			Efficiency	Input [kW]	Efficiency (% load) and power-factor				Full load current [A]			Locked rotor current [A]		
	Motor Size	Power [kW]	Power [HP]			η % 50%	η % 75%	η % 100%	cos−ϕ	230 V	400 V	690 V	230 V	400 V	690 V
3E4 40-200/0.55	80	0.55	0.75	IE2	0.80	71.9	75.9	77.7	0.75	2.4	1.4	-	14.8	8.6	-
3E4 40-200/0.75	90	0.75	1	IE3	1.31	81.5	83.4	84.1	0.71	4.6	2.7	-	32.9	19.0	-
3E4 50-125/0.37	71	0.37	0.5	IE2	0.55	69.4	73.6	74.2	0.7	1.8	1.0	-	7.8	4.5	-
3E4 50-200/0.75	90	0.75	1	IE3	1.31	81.5	83.4	84.1	0.71	4.6	2.7	-	32.9	19.0	-
3E4 50-200/1.1		1.1	1.5		1.31	81.5	83.4	84.1	0.71	4.6	2.7	-	32.9	19.0	-
3E4 50-200/1.5		1.5	2		1.76	81.1	84.1	85.3	0.71	6.2	3.6	-	45	26.0	-
3E4 65-160/0.75		0.75	1.5		1.31	81.5	83.4	84.1	0.71	4.6	2.7	-	32.9	19.0	-
3E4 65-160/1.1		1.1	1.5		1.31	81.5	83.4	84.1	0.71	4.6	2.7	-	32.9	19.0	-
3E4 80-200/2.2	100	2.2	3		2.54	86.1	87	86.7	0.78	7.8	4.5	-	53.7	31.0	-
3E4 80-200/3		3.0	4		3.42	85.7	87.7	87.8	0.72	11.8	6.8	-	83.1	48.0	-
3E4 100-160/1.5	90	1.5	2		1.76	81.8	84.1	85.3	0.71	6.2	3.6	-	45.0	26.0	-
3E4 100-160/2.2	100	2.2	3		2.54	86.1	87	86.7	0.78	7.8	4.5	-	53.7	31.0	-

MOTOR DATA 3ES - 2POLE

Pump type	Motor			Efficiency	Input [kW]	Efficiency (% load) and power-factor				Full load current [A]			Locked rotor current [A]		
	Motor Size	Power [kW]	Power [HP]			η % 50%	η % 75%	η % 100%	cos-φ	230V	400 V	690 V	230 V	400 V	690 V
3ES 32-125/0.75	80	0.75	1	IE3	1.26	78.7	81.7	81.5	0.78	4.3	2.5	-	29.4	17.0	-
3ES 40-160/1.5	90S	1.5	2		1.77	83.2	84.8	84.2	0.85	5.2	3.0	-	43.6	25.2	-
3ES 40-160/2.2	90L	2.2	3		2.61	85.0	86.2	86.5	0.82	8.0	4.6	-	73.3	42.3	-
3ES 40-200/3.0	100L	3.0	4		3.45	82.3	85.8	87.1	0.89	9.7	5.6	-	85.4	49.3	-
3ES 40-200/4.0	112M	4.0	5.5		4.51	86.8	87.8	88.1	0.93	12.1	7.0	-	116.4	67.2	-
3ES 40-200/7.5	132S	7.5	10		8.35	88.6	89.2	90.1	0.92	-	13.1	7.6	-	116.6	67.3
3ES 50-100/0.75	80	0.75	1		1.26	78.7	81.7	81.5	0.78	4.3	2.5	-	29.4	17.0	-
3ES 50-125/1.5	90S	1.5	2		1.77	83.2	84.8	84.2	0.85	5.2	3.0	-	43.6	25.2	-
3ES 50-125/2.2	90L	2.2	3		2.61	85.0	86.2	86.5	0.82	8.0	4.6	-	73.3	42.3	-
3ES 50-160/3.0	100L	3.0	4		3.45	82.3	85.8	87.1	0.89	9.7	5.6	-	85.4	49.3	-
3ES 50-160/4.0	112M	4.0	5.5		4.51	86.8	87.8	88.1	0.93	12.1	7.0	-	116.4	67.2	-
3ES 50-200/5.5	132S	5.5	7.5		6.24	88.0	88.5	89.2	0.9	-	10.0	5.8	-	89.0	51.4
3ES 50-200/7.5		7.5	10		8.35	88.6	89.2	90.1	0.92	-	13.1	7.6	-	116.6	67.3
3ES 50-200/11	160M	11	15		12.15	87.4	89.8	91.2	0.89	-	19.7	11.4	-	179.3	103.5
3ES 65-100/0.75	80	0.75	1		1.26	78.7	81.7	81.5	0.78	4.3	2.5	-	29.4	17.0	-
3ES 65-100/1.1	80	1.1	2		1.26	78.7	81.7	82.7	0.76	4.2	2.4	-	38.7	22.3	-
3ES 65-100/1.5	90S	1.5	2		1.77	83.2	84.8	84.2	0.85	5.2	3.0	-	43.6	25.2	-
3ES 65-200/9.2	132M	9.2	12.5		10.17	88.6	89.8	90.7	0.89	-	16.5	9.5	-	166.7	96.2
3ES 65-200/11	160M	11	15		12.15	87.4	89.8	91.2	0.89	-	19.7	11.4	-	179.3	103.5
3ES 65-200/15		15	20		16.46	91.0	91.3	91.9	0.89	-	26.7	15.4	-	259.0	149.5
3ES 80-100/1.5	90S	1.5	2		1.77	83.2	84.8	84.2	0.85	5.2	3.0	-	43.6	25.2	-
3ES 80-100/2.2	90L	2.2	3		2.61	85.0	86.2	86.5	0.82	8.0	4.6	-	73.3	42.3	-
3ES 80-160/9.2	132M	9.2	12.5		10.17	88.6	89.8	90.7	0.89	-	16.5	9.5	-	166.7	96.2
3ES 80-160/11	160M	11	15		12.15	87.4	89.8	91.2	0.89	-	19.7	11.4	-	179.3	103.5
3ES 80-160/15		15	20		16.46	91.0	91.3	91.9	0.89	-	26.7	15.4	-	259.0	149.5
3ES 80-200/18.5	160L	18.5	25		20.12	91.6	92.8	92.4	0.88	-	33.0	19.1	-	353.1	203.9
3ES 80-200/22	180	22	30		23.69	92.3	92.9	92.9	0.9	-	38.0	22.0	-	361.0	209.0
3ES 100-160/11	160M	11	15		12.15	87.4	89.8	91.2	0.89	-	19.7	11.4	-	179.3	103.5
3ES 100-160/15		15	20		16.46	91.0	91.3	91.9	0.89	-	26.7	15.4	-	259.0	149.5
3ES 100-160/18.5	160L	18.5	25		20.12	91.6	92.8	92.4	0.88	-	33.0	19.1	-	353.1	203.9

MOTOR DATA 3ES - 4POLE

Pump type	Motor			Efficiency	Input	Efficiency (% load) and power-factor				Full load Current			Locked rotor current		
	Motor Size	Power				η %			cos-φ	[A]			[A]		
		[kW]	[HP]		[kW]	50%	75%	100%		230V	400V	690V	230V	400V	690V
3ES4 40-200/0.55	80	0.55	0.75	IE2	0.80	67.0	69.0	70.0	0.72	2.8	1.6	-	9.9	5.7	-
3ES4 40-200/0.75	80	0.75	1	IE3	0.92	80.7	81.5	82.5	0.74	3.1	1.8	-	17.3	10.0	-
3ES4 50-200/0.75	80	0.75	1		0.92	80.7	81.5	82.5	0.74	3.1	1.8	-	17.3	10.0	-
3ES4 50-200/1.1	90L	1.1	1.5		1.30	83.3	84.3	84.1	0.75	4.3	2.5	-	30.7	17.7	-
3ES4 50-200/1.5	90L	1.5	2		1.80	84.1	85.2	85.3	0.72	6.2	3.6	-	41.0	23.7	-
3ES4 65-160/0.75	80	0.75	1		0.92	80.7	81.5	82.5	0.74	3.1	1.8	-	17.3	10.0	-
3ES4 65-160/1.1	90L	1.1	1.5		1.30	83.3	84.3	84.1	0.75	4.3	2.5	-	30.7	17.7	-
3ES4 80-200/2.2	100L	2.2	3		2.58	83.2	86.2	86.7	0.63	10.2	5.9	-	73.6	42.5	-
3ES4 80-200/3	100L	3.0	4		3.44	85.1	87.1	87.7	0.73	11.8	6.8	-	95.4	55.1	-
3ES4 100-160/1.5	90L	1.5	2		1.80	84.1	85.2	85.3	0.72	6.2	3.6	-	41.0	23.7	-
3ES4 100-160/2.2	100L	2.2	3		2.58	83.2	86.2	86.7	0.63	10.2	5.9	-	73.6	42.5	-

NOISE DATA 2POLE

Noise data 3E-2P

Pump type	Power [kW]	Power [HP]	LpA - dB(A) *
3E 32-125/0.37	0.37	0.5	61
3E 32-125/0.55	0.55	0.75	62
3E 32-125/0.75	0.75	1	
3E 40-160/1.1	1.1	1.5	69
3E 40-160/1.5	1.5	2	
3E 40-160/2.2	2.2	3	
3E 40-200/3	3	4	76
3E 40-200/4	4	5.5	
3E 40-200/7.5	7.5	10	79
3E 50-100/0.37	0.37	0.5	61
3E 50-100/0.55	0.55	0.75	62
3E 50-100/0.75	0.75	1	
3E 50-125/1.5	1.5	2	69
3E 50-125/2.2	2.2	3	
3E 50-160/3	3	4	76
3E 50-160/4	4	5.5	
3E 50-200/5.5	5.5	7.5	79
3E 50-200/7.5	7.5	10	
3E 50-200/11	11	15	
3E 65-100/0.55	0.55	0.75	61
3E 65-100/0.75	0.75	1	62
3E 65-100/1.1	1.1	1.5	69
3E 65-100/1.5	1.5	2	
3E 65-200/9.2	9.2	12.5	82
3E 65-200/11	11	15	
3E 65-200/15	15	20	86
3E 80-100/1.5	1.5	2	69
3E 80-100/2.2	2.2	3	
3E 80-160/9.2	9.2	12.5	82
3E 80-160/11	11	15	
3E 80-160/15	15	20	86
3E 80-200/18.5	18.5	25	
3E 80-200/22	22	30	
3E 100-160/11	11	15	80
3E 100-160/15	15	20	
3E 100-160/18.5	18.5	25	83-82

Noise data 3ES-2P

Pump type	Power [kW]	Power [HP]	LpA - dB(A) *
3ES 32-125/0.75	0.75	1	<70
3ES 40-160/1.5	1.5	2	
3ES 40-160/2.2	2.2	3	
3ES 40-200/3	3	4	
3ES 40-200/4	4	5.5	
3ES 40-200/7.5	7.5	10	72
3ES 50-100/0.75	0.75	1	<70
3ES 50-125/1.5	1.5	2	
3ES 50-125/2.2	2.2	3	
3ES 50-160/3	3	4	
3ES 50-160/4	4	5.5	
3ES 50-200/5.5	5.5	7.5	72
3ES 50-200/7.5	7.5	10	
3ES 50-200/11	11	15	74
3ES 65-100/0.75	0.75	1	<70
3ES 65-100/1.1	1.1	1.5	
3ES 65-100/1.5	1.5	2	
3ES 65-200/9.2	9.2	12.5	72
3ES 65-200/11	11	15	74
3ES 65-200/15	15	20	
3ES 80-100/1.5	1.5	2	<70
3ES 80-100/2.2	2.2	3	
3ES 80-160/9.2	9.2	12.5	72
3ES 80-160/11	11	15	74
3ES 80-160/15	15	20	
3ES 80-200/18.5	18.5	25	
3ES 80-200/22	22	30	77
3ES 100-160/11	11	15	83-82
3ES 100-160/15	15	20	
3ES 100-160/18.5	18.5	25	

* Mean value of several measures at 1m distance around the pump.
Tolerance ± 2.5 dB.
Sound pressure level of motor pumps with AEG

NOISE DATA 4POLE

Noise data 3E-4P

Pump type	Power [kW]	Power [HP]	LpA - dB(A) *
3E4 40-200/0.55	0.55	0.75	<70
3E4 40-200/0.75	0.75	1	
3E4 50-125/0.37	0.37	0.5	
3E4 50-200/1.5	1.5	2	
3E4 50-200/1.1	1.1	1.5	
3E4 50-200/0.75	0.75	1	
3E4 65-160/1.1	1.1	1.5	
3E4 65-160/0.75	0.75	1	
3E4 80-200/2.2	2.2	3	
3E4 80-200/3	3	4	
3E4 100-160/1.5	1.5	2	
3E4 100-160/2.2	2.2	3	

Noise data 3ES-4P

Pump type	Power [kW]	Power [HP]	LpA - dB(A) *
3ES4 40-200/0.55	0.55	0.75	<70
3ES4 40-200/0.75	0.75	1	
3ES4 50-200/0.75	0.75	1	
3ES4 50-200/1.1	1.1	1.5	
3ES4 50-200/1.5	1.5	2	
3ES4 65-160/0.75	0.75	1	
3ES4 65-160/1.1	1.1	1.5	
3ES4 80-200/2.2	2.2	3	
3ES4 80-200/3	3	4	
3ES4 100-160/1.5	1.5	2	
3ES4 100-160/2.2	2.2	3	

* Mean value of several measures at 1m distance around the pump.
Tolerance ± 2.5 dB.
Sound pressure level of motor pumps with AEG