
INOXPA®

SLR

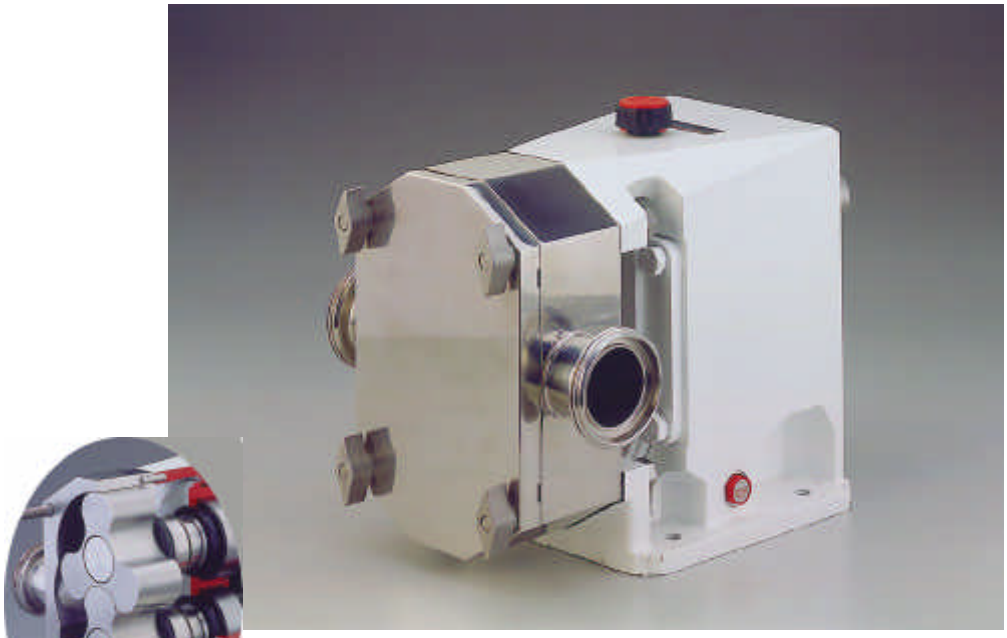

SANITARY LOBE ROTOR PUMP

For viscous products

In stainless steel AISI 316 for the Food, Dairy, Beverage, Pharmaceutical Industrie

SLR
Flows up to 160 m3/h. 704 US Gpm
Maximum pressure 12 bars - 174 Psi
Maximum temperature 110º C 230º F

SLR HYDUTY
Flows up to 28 m3/h. 123 US Gpm
Maximum pressure 22 bars - 319 Psi
Maximum temperature 180º C -360º

PUMP SIZE	PORTS		Capacity	Pressure	Max.speed	Max. Capacity	PRICE
SLR	DN	INCH	l/100 rpm	bars	rpm	m3/h	DEM
0-10	10	1/2"	1,03	22	1450	0,9	2843
0-20	20	3/4"	2,1	12	1450	1,8	2941
0-25	25	1"	3	7	950	1,7	3039
1-25	25	1"	9,96	12	950	5,67	3556
1-40	40	1 1/2"	13,94	7	950	7,94	3901
2-25	25	1"	7,43	22	1450	6,5	4874
2-40	40	1 1/2"	23,39	12	950	13,33	4431
2-50	50	2"	30,08	7	950	17,14	4604
3-40	40	1 1/2"	23,4	22	1200	16,85	7108
3-50	50	2"	67,7	12	720	29,25	6462
3-80	80	3"	95,28	7	720	41,16	6858
4-50	50	2"	50,14	22	950	28,58	16514
4-100	100	4"	217,23	12	600	78,2	15012
4-150	150	6"	321,67	7	600	115,8	16555
5-125	125	5"	554,72	12	400	133,13	36078
5-150	150	6"	662,22	7	400	158,93	40392

For specific applications, please, send your inquiries.
We will select for you the most suitable pump

INOXPA, S.A. - PO Box 174 - c / Telers, 54 - ES 17820 BANYOLES (Girona) Spain
Tel (+34) 972 575 200 - Fax (+34) 972 575 502 - **www.inoxpa.com** - Email: inoxpa@inoxpa.com