
PK 15(11/2") HIGH PRESSURE METALIC DIAPHRAGM PUMP

Flow Rate	170 lt/min
Pompa Giriş-Çıkışı	11/2"
Max. Discharge Pressure	7 bar (Discharge pressure 14 bar)
Max. Discharge Head	140 m
Suction Depth	2 m
Liquit Temp. Limit	-18 / 85 °C
Air İnlet	3/4"
Solid Handling Capability	6 mm
Weight	26 kg




MODEL PK 15	A	B	C	D
ÖLÇÜLER DIMENSIONS (mm)	575	429	255	342

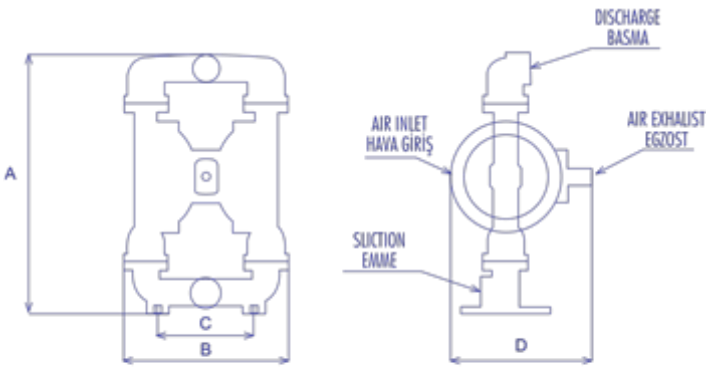

The air operated diaphragm pumps run by compressed air and are used for transfernng industrial liquid.High viscosity, corrosive and abrasive liquids can be transferred by the diaphrgam pumps.The diaphragm pumps allovvto pass varying sizes and types of solid particles.The pumps are completely ex-proof because ofthere is no electrical motor.

FEATURES
Dry self-pıiming
Variable flovvrate
Solid handling capability
High and low viscous
No electrical components to spark
ATEX Certificate
Run dry vvithout damage
APPLICATIONS
Paint
Chemical Liquid
Marine
Glue
Solvents
Cosmetic Liquid
Food

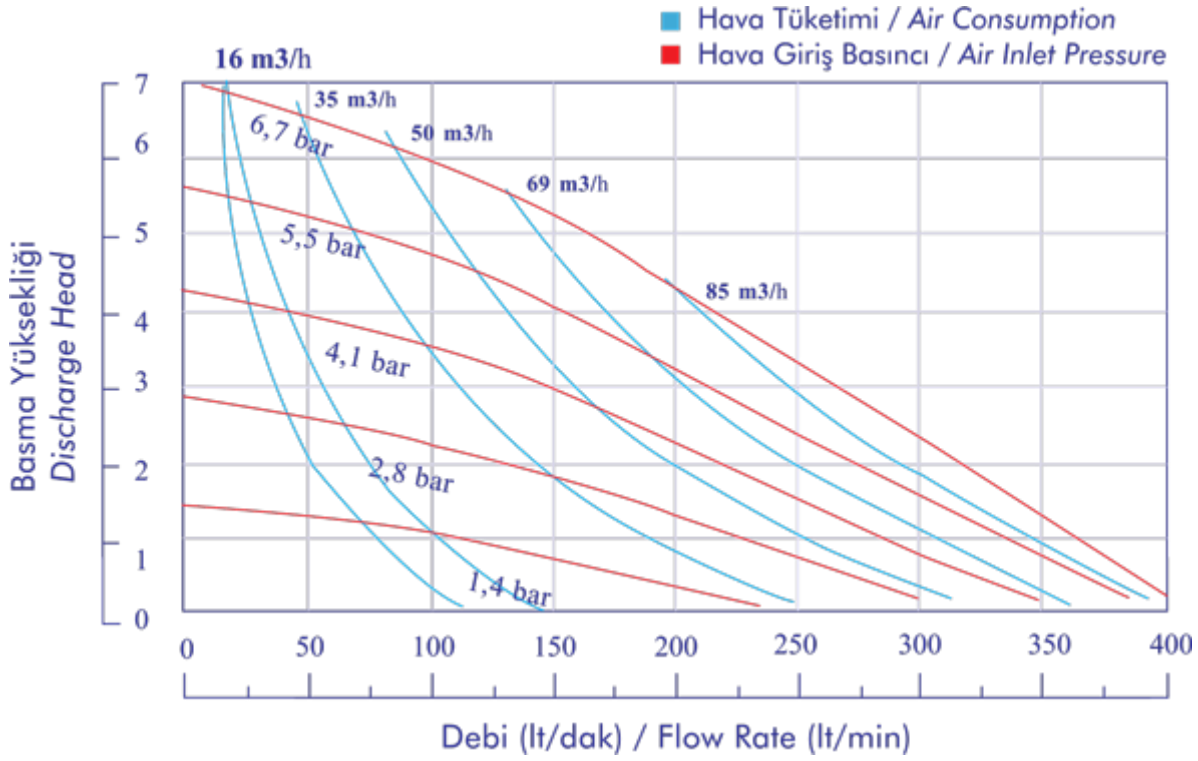
Hava Tüketimi / Air Consumption
Hava Giriş Basıncı / Air Inlet Pressure
16 m3/h
35 m3/h
50 m3/h
69 m3/h
85 m3/h
6,7 bar
5,5 bar
4,1 bar
2,8 bar
1,4 bar
Basma Yüksekliği
Discharge Head
0
1
2
3
4
5
6
7
0
50
100
150
200
250
300
350
400
Debi (lt/dak) / Flow Rate (lt/min)