
PK 30(3") HIGH PRESSURE METALIC DIAPHRAGM PUMP

Flow Rate	370 lt/min
Pompa Giriş-Çıkışı	3"
Max. Discharge Pressure	7 bar (Discharge pressure 14 bar)
Max. Discharge Head	140 m
Suction Depth	2 m
Liquit Temp. Limit	-18 / 85 °C
Air İnlet	3/4"
Solid Handling Capability	8 mm
Weight	51 kg




MODEL PK 30	A	B	C	D
ÖLÇÜLER DIMENSIONS (mm)	860	512	300	403

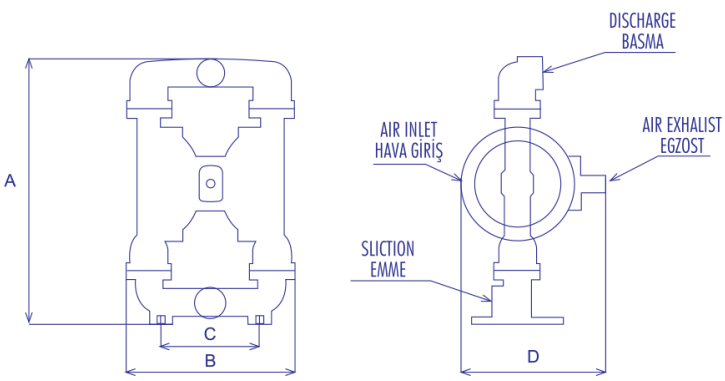

The air operated diaphragm pumps run by compressed air and are used for transfernng industrial liquid.High viscosity, corrosive and abrasive liquids can be transferred by the diaphrgam pumps.The diaphragm pumps allovvto pass varying sizes and types of solid particles.The pumps are completely ex-proof because ofthere is no electrical motor.

FEATURES
Dry self-pıiming
Variable flovvrate
Solid handling capability
High and low viscous
No electrical components to spark
ATEX Certificate
Run dry vvithout damage
APPLICATIONS
Paint
Chemical Liquid
Marine
Glue
Solvents
Cosmetic Liquid
Food

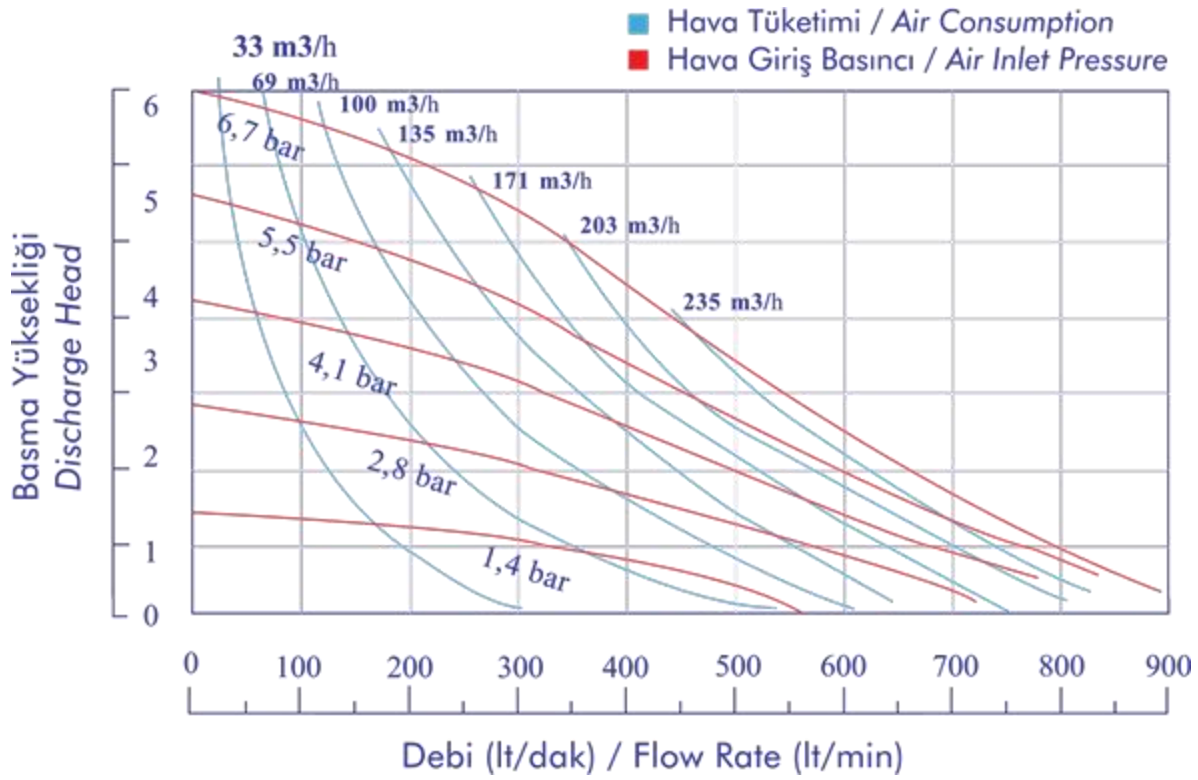
Hava Tüketimi / Air Consumption
Hava Giriş Basıncı / Air Inlet Pressure
33 m3/h
69 m3/h
100 m3/h
135 m3/h
171 m3/h
203 m3/h
235 m3/h
6,7 bar
5,5 bar
4,1 bar
2,8 bar
1,4 bar
Basma Yüksekliği
Discharge Head
0
1
2
3
4
5
6
0
100
200
300
400
500
600
700
800
900
Debi (lt/dak) / Flow Rate (lt/min)